

Photoelectric switches - Relay

CdS-FC



white mat, similar to
RAL9010 , Art.-Nr.: 92249

Product Information

Product may not be available in all countries

- Remote control-capable photoelectric switch
- Extra flat form - only 6 mm high
- Adjustable deactivation delay with selflearning deactivation and twilight value
- **Application examples:** ideal for entrance areas, staircases, offices and training facilities

Technical Data

Voltage:	110 - 240 V AC 50 / 60 Hz
Dimensions:	Ø 80 x 74 mm
Power consumption:	< 1 W
Degree / class of protection:	IP20 / Class II
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
	Channel 1 (lighting control)
Switching power:	2000 W, cos φ = 1 1000 VA, cos φ = 0,5

max. inrush current I_p (20 ms) = 165 A

max. inrush current I_p (200 μ s) = 800 A

Type of contact: 1x μ -contact, NO contact with tungsten pre-make contact

Switch-on delay: determined automatically

Switch-off delay: 5 s - 30 min

Switch-on threshold: 10 - 2000 Lux


Mixed light, daylight + artificial-light measuring

Description


Description	Colour	Part number	EAN number
CdS-FC	white mat, similar to RAL9010	92249	4007529922499

Accessory

Description	Colour	Part number	EAN number
BLE-IR-Adapter	black	93067	4007529930678
IR-Adapter for Smartphones	black	92726	4007529927265
IR-CdS-FP	-	92396	4007529923960

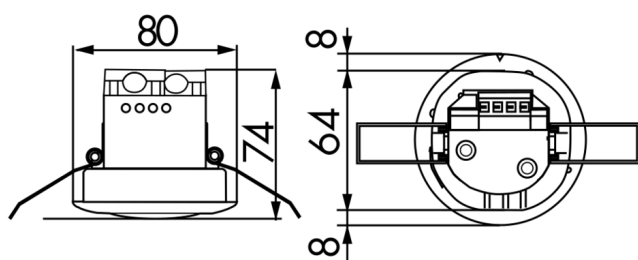

Dimensions 92249

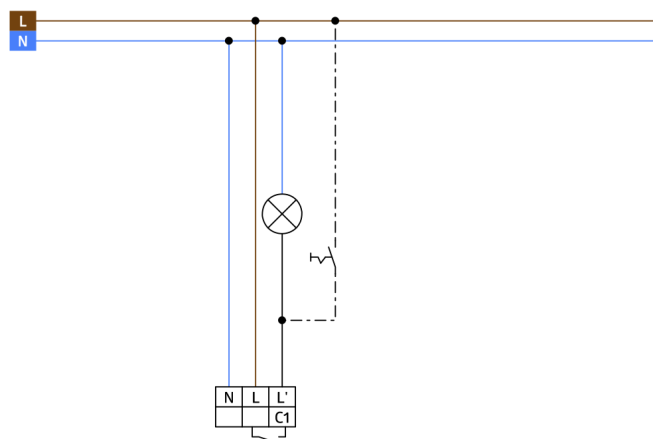

Wiring diagrams