

B.E.G.**LUXOMAT®**

CdS-DIM-FC

92589 EAN: 4007529925896

- Voltage: 110 – 240 V AC 50 / 60 Hz
- Dimensions: Ø 80 x 75 mm
- Power consumption: < 1 W

Order data

Designation	Colour	Art.No
CdS-DIM-FC	white	92589

Accessories

Designation	Colour	Art.No
BLE-IR-Adapter	black	93067
IR-CdS	-	92577
Wire basket BSK (Ø 200 x 90 mm)	white	92199

Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	Ø 80 x 75 mm
Power consumption:	< 1 W
Degree / class of protection:	IP20 / Class II
Impact strength:	IK05
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010
Channel 1 (lighting control)	
Switching power:	2300 W, $\cos \varphi = 1$ 1150 VA, $\cos \varphi = 0.5$ max. inrush current I_p (20 ms) = 165 A max. inrush current I_p (200 μ s) = 800 A
Type of contact (k):	1x μ -contact, NO contact with tungsten pre-make contact
DIM output:	1-10 V DC, up to 50 ballasts
Switch-on delay:	determined automatically
Switch-off delay:	1 min - 30 min
Brightness set value:	10 – 2000 Lux

Product information

Remote controllable, photo electric switch with ability to dim, for ceiling mounting

Illumination can be dimmed to a desired brightness value.

Actual light value can be read and delay time can be set using the optional infrared remote control

For connection of up to 50 EB



Constant light regulation

Dynamic switch-on delay

Relay with tungsten pre-make contact, optimised for LED loads

Avoidance of standby losses of the lighting system in accordance with EnEV DIN V 18599-4

Application examples: ideal for entrance areas, staircases, halls where permanent light is required

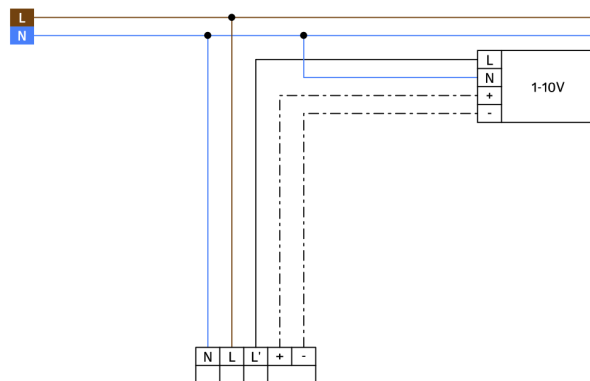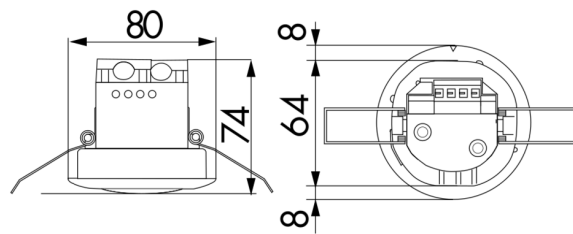

Order data


Designation	Colour	Art.No	EAN
CdS-FC-92249	white	92249	4007529922499
PD2-M-1C-FC-92565	white	92565	4007529925650
PD2-M-1C-FM-92555	white	92555	4007529925551

Accessories




BLE-IR-Adapter
Art.No: 93067

Dimensions: 40 x 55 x 103 mm
Material color: black
Frequency: 2.4 GHz ISM band, GFSK 0.2 dBm + 5.3 dBi = 5.5 dBm



IR-CdS
Art.No: 92577

Battery: 3.0 V Lithium CR2032 (inclusive)
Dimensions: 80 x 60 x 8 mm
Material color: -



Wire basket BSK (Ø 200 x 90 mm)
Art.No: 92199

Dimensions: Ø 200 x 90 mm
Impact strength: IK09
Housing: coated steel basket