

**B.E.G.****LUXOMAT®**

## LC-Click-N 200 UK 2.000 W

Prod.No. 93042 EAN: 4007529930425

- Voltage: 110 – 240 V AC 50 / 60 Hz
- Dimensions: 103 x 78 x 84 mm
- Power consumption: approx. 0.4 W

### Order data

Designation	Colour	Art.No
LC-Click-N 200 UK 2.000 W	white	93042

### Accessories

Designation	Colour	Art.No
RC-Arc extinction kit	white	10880
Mini-RC-Arc extinction kit		10882
Wire basket BSK (Ø 164 x 143 mm)	white	92467
Pole holder with weather protection	stainless steel	93220
Wall holder with weather protection	white	93222
Wall holder with weather protection	anthracite	93221
Blinds LC-Click-N		32699

## Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	103 x 78 x 84 mm
Power consumption:	approx. 0.4 W
Detection area:	horizontal 200° (Wall mounting) max. 12 m across max. 4 m towards
Range:	max. 2 m anti- creep protection
Monitored area (tangential movement):	250 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 3 m / 2.5 m
Degree / class of protection:	IP54 / Class II
Impact strength:	IK04
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010

### Channel 1 (lighting control)

Switching power:	2000 W, $\cos \varphi$ = 1 1000 VA, $\cos \varphi$ = 0.5 400 W LED
Type of contact (k):	1x $\mu$ -contact, NO contact
Follow-up time:	4 sec – 20 min
Switch-on threshold:	2 – 500 Lux

## Product information

Motion detector with 200° detection area and 180° anti-creep zone

Adjustable ball head




Detection area can be restricted with blinds

Zero crossing switching

Simple mounting thanks to plug base

Cable entry possible from above, from below and from behind

Can be mounted on standard flush-mount boxes

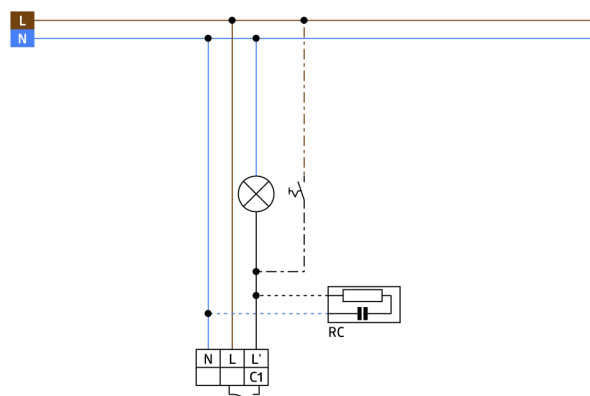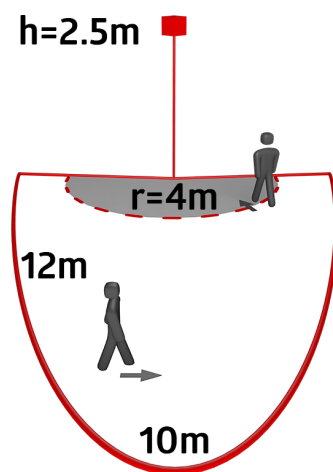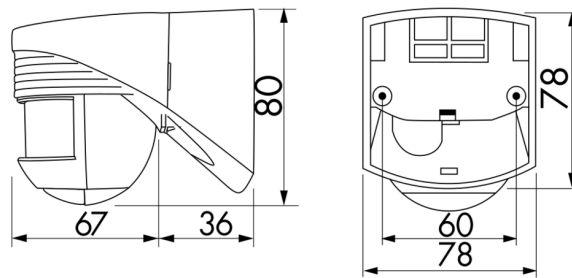

## Accessories



### RC-Arc extinction kit

Art.No: 10880

Voltage: 230 V AC ±10%

Dimensions: 38 x 12 x 26 mm

Degree / class of protection: IP20 / Class II



### Mini-RC-Arc extinction kit

Art.No: 10882

Voltage: 230 V AC ±10%

Dimensions: 50 x 23 x 8 mm

Degree / class of protection: IP20 / Class II



### Wire basket BSK (Ø 164 x 143 mm)

Art.No: 92467

Dimensions: Ø 164 x 143 mm

Impact strength: IK09

Housing: coated steel basket



### Pole holder with weather protection

Art.No: 93220

Dimensions: 188 x 98 x 134 mm

Housing: stainless steel

Material color: stainless steel



### Wall holder with weather protection

Art.No: 93222

Dimensions: 188 x 98 x 134 mm

Material color: white



### Wall holder with weather protection

Art.No: 93221

Dimensions: 188 x 98 x 134 mm

Material color: anthracite



### Blinds LC-Click-N

Art.No: 32699

Housing: polycarbonate, UV-resistant

Material color: transparent