B.E.G. LUXOMAT®



RC-plus next N 130 Set 93324-92467-97014

230V PIR outdoor motion detector with a 130° detection angle and a range of up to 20 m (450 m²), featuring anti-crawl protection and remote control capability

Order data

Designation	Colour	Art.No
RC-plus next N 130	brown	93324
Wire basket BSK (Ø 164 x 143 mm)	white	92467
Outside corner socket RC-plus next	brown	97014

Areas of application

- outdoor areas (entrances/access roads)
- parking areas
- underground car parks
- high-bay warehouse

Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz (can also be supplied with other operating voltages ON request)
Dimensions:	**Ø 164 x 143 mm (92467) + Ø 71 x 34 mm (97014)**
Power consumption:	approx. 0.5 W
Detection area:	horizontal 130° (Wall mounting)
Range:	max. 20 m across max. 6 m towards max. 4 m anti-creep protection
Monitored area (tangential movement):	450 m² / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 5 m / 2.5 m
Degree / class of protection:	IP54 / Class II
Impact strength:	**IK09 (92467)**
Ambient temperature:	-25 °C to +50 °C
Housing:	**polycarbonate, UV-resistant + coated steel basket (92467)**
Material color:	brown mat, similar to RAL8014
Channel 1 (lighting control)	
Switching power:	3000 W, cos φ = 1 1500 VA, cos φ = 0.5 800 W LED max. inrush current Ip (20 ms) = 165 A max. inrush current Ip (200 µs) = 800 A
Type of contact (k):	1x µ-contact, NO contact with tungsten pre-make contact
Follow-up time:	15 sec – 16 min, Pulse
Switch-on threshold:	2 – 500 Lux

Product information

Set : RC-plus next N 130 + Wire basket BSK (Ø 164 x 143 mm) white + Outside corner socket RC-plus next brown mat, similar to RAL8014

Motion detector with 130° detection area and creep protection

Mechanical range adjustment

Different follow-up time depending on direction of movement

Uninterrupted parallel circuit detection of several detectors

Manual switching via push-button possible

Adjustable ball head

Immediate operation using factory settings

Additional functions can be set up using the optional remote control.

Zero crossing switching

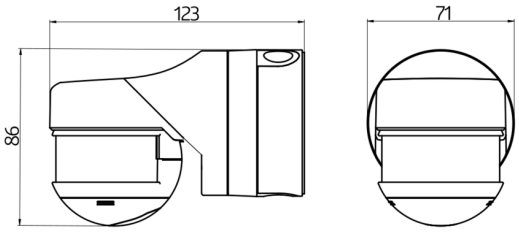
Socket compatible to RC-plus (next) and Vario

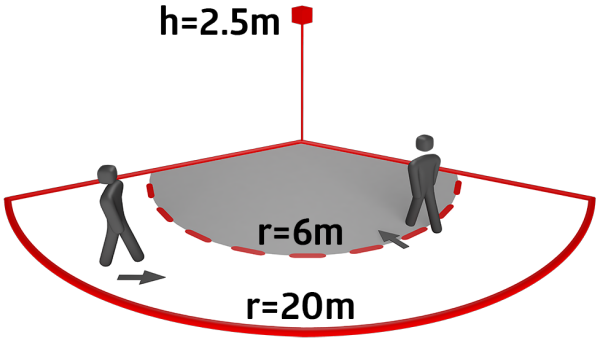
Faulty switching due to animals can be avoided by reducing the sensitivity

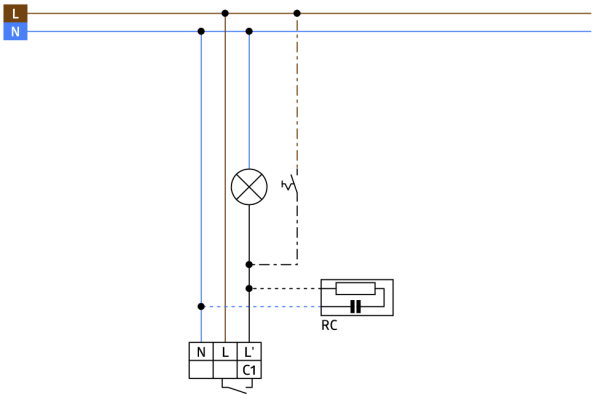
Easy mounting thanks to plug base

Wall, ceiling and corner mounting

Factory settings 3 min and 20 lux


123
71
86


h=2.5m
r=6m
r=20m


L
N
RC
N
L
L'
C1

Set items

To receive the bundle according to the technical specification, please order the items listed.



RC-plus next N 130
Art.No: 93324

Voltage: 110 – 240 V AC 50 / 60 Hz (can also be supplied with other operating voltages ON request)
Dimensions: 121 x 71 x 85 mm
Power consumption: approx. 0.5 W



Wire basket BSK (Ø 164 x 143 mm)
Art.No: 92467

Dimensions: Ø 164 x 143 mm
Impact strength: IK09
Housing: coated steel basket



Outside corner socket RC-plus next
Art.No: 97014

Dimensions: Ø 71 x 34 mm
Degree / class of protection: IP54
Housing: polycarbonate, UV-resistant