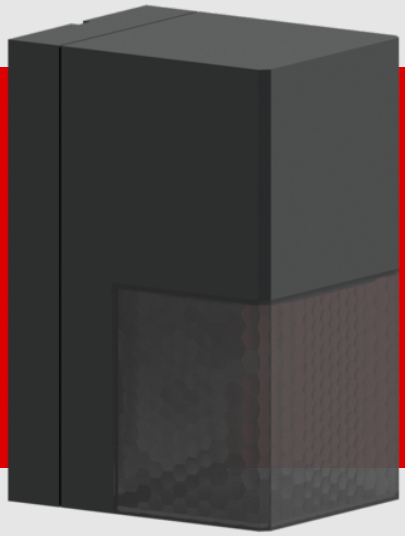
B.E.G. LUXOMAT® net



# Aleum AD BMS2 DALI-2

93556 EAN: 4007529935567

DALI-2 (BMS) Outdoor PIR Multisensor with 180° detection and a range of up to 16 m (400 m²), DALI-2 Input Device

## Order data

| Designation | Colour | Art.No |
|---|---|---|
| Aleum AD BMS2 DALI-2 | anthracite | 93556 |

## Areas of application

- outdoor areas (entrances/access roads)
- staircases

## Accessories

| Designation | Colour | Art.No |
|---|---|---|
| Wire basket BSK (Ø 164 x 143 mm) | white | 92467 |

## Technical data

| | |
|---|---|
| Voltage: | via DALI Bus, max. 22.5 V DC |
| Dimensions: | 71 x 54 x 105 mm |
| Typ. power input: | 7 mA |
| Settling time: | 200 ms |
| Power consumption: | approx. 0.5 W |
| Detection area: | horizontal 180° (Wall mounting) |
| Range: | max. 16 m across<br>max. 5 m towards<br>max. 3 m anti-creep protection |
| Monitored area (tangential movement): | 400 m² / 2.5 m mounting height |
| Mounting height min./max./recommended: | 2 m / 4 m / 2.5 m |
| Degree / class of protection: | IP54 / Class II |
| Impact strength: | IK03 |
| Measured light output: | 0 - 4095 Lux, Mixed light measuring |
| Ambient temperature: | -25 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | anthracite mat, similar to RAL7016 |

## Product information

Motion detector with 180° detection area and creep protection

DALI-2 multisensor (input device)

DALI-2 certified product

Powered via DALI bus

DALI multimaster technology according to IEC 62386 part 103

Instance 0 provides information regarding occupancy and movement for the DALI-Bus according to IEC 62386 part 303

Instance 1 provides LUX values for the DALI-Bus according to IEC 62386 part 304

Instances 2 to 6 provide information regarding the pressing of control buttons of a compatible mini-IR remote control according to IEC 62386 part 301 on the DALI bus

Parameterisation is possible via a mandatory Multimaster-Application-Controller of any manufacturer. This controller must support IEC 62386 parts 101/103/301/303/304.

Individual adaption of the PIR sensor sensitivity

Status LEDs can be activated / deactivated

Bit resolution of light sensor adjustable

Reflection factor for calculated lux value adjustable

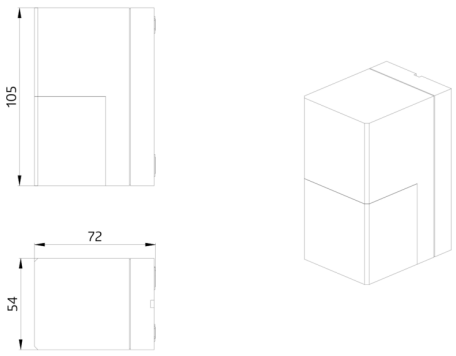
Bright LED indication for commissioning

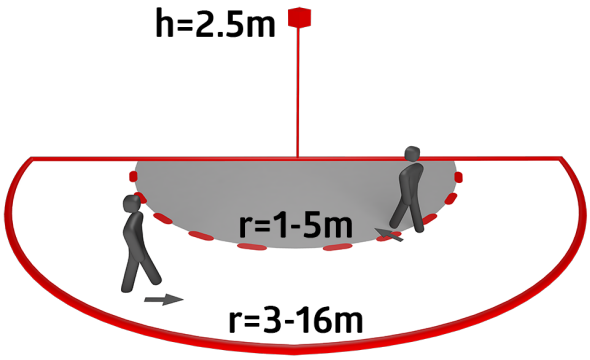
Mechanical range adjustment of different PIRs

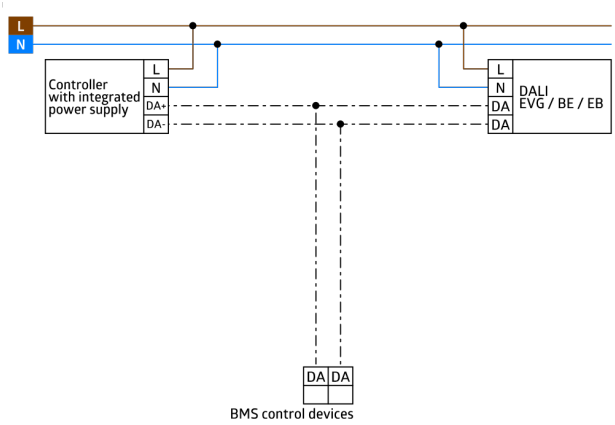
Faulty switching due to animals can be avoided by reducing the sensitivity

Simple mounting thanks to plug base

**Application examples:**
outdoor areas (entrances/access roads), staircases


105
72
54


h=2.5m
r=1-5m
r=3-16m


L
N
Controller
with integrated
power supply
L
N
DA+
DA-
L
N
DA
DA
DALI
EVG / BE / EB
DA
DA
BMS control devices

## Accessories



**Wire basket BSK (Ø 164 x 143 mm)**
Art.No: 92467

Dimensions: Ø 164 x 143 mm
Impact strength: IK09
Housing: coated steel basket