



## AL93-20-300-LED-3C

Prod.No. 93633 EAN: 4007529936335

- Voltage: 220 – 240 V AC 50 / 60 Hz
- Dimensions: Ø 300 x 51.3 mm
- Colour temperature: 3000 / 4000 / 5700 K

### Order data

Designation	Colour	Art.No
AL93-20-300-LED-3C	white	93633

### Areas of application

- corridors/hallways
- staircases
- toilets
- equipment rooms
- entrance halls
- plumbed rooms/bathrooms

## Technical data

Voltage:	220 – 240 V AC 50 / 60 Hz
Dimensions:	Ø 300 x 51.3 mm
Colour temperature:	3000 / 4000 / 5700 K
Luminous flux / intensity:	1600 / 1850 / 1700 lm
Anti-glare:	UGR < 19
Efficiency:	80 / 92 / 85 lm/W
Photobiological safety:	RG 0
Colour reproduction:	CRI > 80
Rated life time:	50000 h (L80/B10)
Power consumption:	20 W / PF 0.8
Degree / class of protection:	IP54 / Class II
Flammability rating:	UL-94 V2, 750 °C
Impact strength:	IK08
Ambient temperature:	-20 °C to +45 °C
Housing:	Polycarbonate / ADC12
Material color:	white, similar to RAL9016

## Product information

Flat round LED luminaires for ceiling mounting

Three colours in one light, switchable selection between warm, neutral or daylight white illumination

Energy efficient light with long service life > 50,000 hours


Anti-glare system with recessed LED and diffusers

Sturdy plastic case made of polycarbonate

Easy installation with a socket incl. Clamps

### Application examples:

corridors/hallways, staircases, toilets, equipment rooms, entrance halls, plumbed rooms/bathrooms

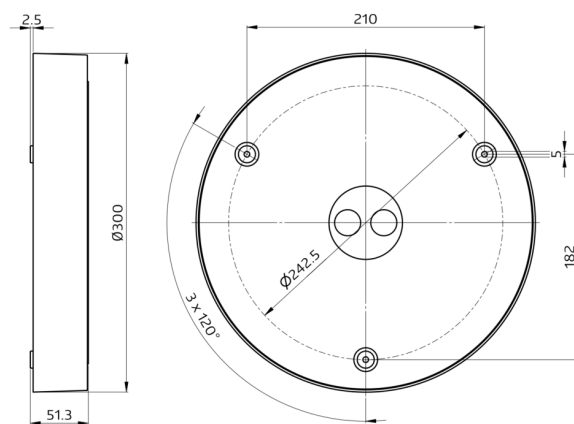

h (m)	Ø (m)	E (lx)
1.0	1.2	1518
2.0	2.5	379
3.0	3.7	169
4.0	4.9	95
5.0	6.1	61

