



## Aleum WB BMS2 DALI-2

Prod.No. 93555 EAN: 4007529935550

DALI-2 (BMS) Outdoor PIR Multisensor with 180° detection and a range of up to 16 m (400 m²), DALI-2 Input Device

### Areas of application

- outdoor areas (entrances/access roads)
- staircases

### Order data

Designation	Colour	Art.No
Aleum WB BMS2 DALI-2	white	93555

### Accessories

Designation	Colour	Art.No
Wire basket BSK (Ø 164 x 143 mm)	white	92467

## Technical data

Voltage:	via DALI Bus, max. 22.5 V DC
Dimensions:	71 x 54 x 105 mm
Typ. power input:	7 mA
Settling time:	200 ms
Power consumption:	approx. 0.5 W
Detection area:	horizontal 180° (Wall mounting) max. 16 m across max. 5 m towards
Range:	max. 3 m anti- creep protection
Monitored area (tangential movement):	400 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 4 m / 2.5 m
Degree / class of protection:	IP54 / Class II
Impact strength:	IK03
Measured light output:	0 - 4095 Lux, Mixed light measuring
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010

## Product information

Motion detector with 180° detection area and creep protection

DALI-2 multisensor (input device)

DALI-2 certified product

Powered via DALI bus

DALI multimaster technology according to IEC 62386 part 103

Instance 0 provides information regarding occupancy and movement for the DALI-Bus according to IEC 62386 part 303

Instance 1 provides LUX values for the DALI-Bus according to IEC 62386 part 304

Instances 2 to 6 provide information regarding the pressing of control buttons of a compatible mini-IR remote control according to IEC 62386 part 301 on the DALI bus

Parameterisation is possible via a mandatory Multimaster-Application-Controller of any manufacturer. This controller must support IEC 62386 parts 101/103/301/303/304.

Individual adaption of the PIR sensor sensitivity

Status LEDs can be activated / deactivated

Bit resolution of light sensor adjustable

Reflection factor for calculated lux value adjustable

Bright LED indication for commissioning


Mechanical range adjustment of different PIRs

Faulty switching due to animals can be avoided by reducing the sensitivity

Simple mounting thanks to plug base

### Application examples:

outdoor areas (entrances/access roads), staircases

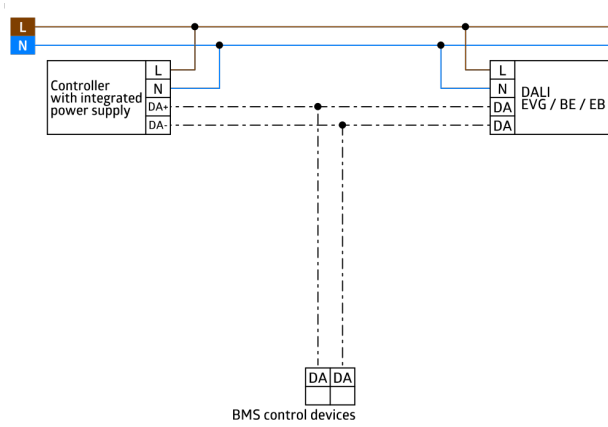

## Accessories



### **Wire basket BSK (Ø 164 x 143 mm)**

Art.No: 92467

Dimensions: Ø 164 x 143 mm

Impact strength: IK09

Housing: coated steel basket