B.E.G. LUXOMAT®



# CdS-SM

Prod.No. 92369 EAN: 4007529923694

230V twilight switch for wall and pole mounting

## Order data

| Designation | Colour | Art.No |
|---|---|---|
| CdS-SM | white | 92369 |

## Technical data

| | |
|---|---|
| Voltage: | 110 – 240 V AC 50 / 60 Hz |
| Dimensions: | 42 x 80 x 96 mm |
| Power consumption: | < 0.5 W |
| Degree / class of protection: | IP54 / Class II |
| Impact strength: | IK01 |
| Ambient temperature: | -25 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | white, similar to RAL9010 |
| **Channel 1 (lighting control)** | |
| Switching power: | 2300 W, cos φ = 1<br>1150 VA, cos φ = 0.5<br>300 W LED |
| Type of contact (k): | 1x µ-contact, NO contact |
| Switch-on and -off delay: | 1 s - 120 s |
| Switch-on threshold: | 2 – 1000 Lux |

## Product information

Photoelectric switch for automatically switching

Activation and deactivation delay with self-learning deactivation-light value

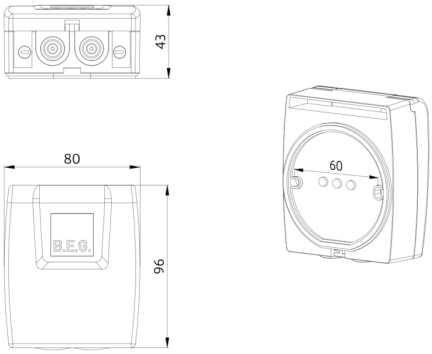
Integrated automatic function (10 Lux / 40 sec. activation / 120 sec. deactivation delay)

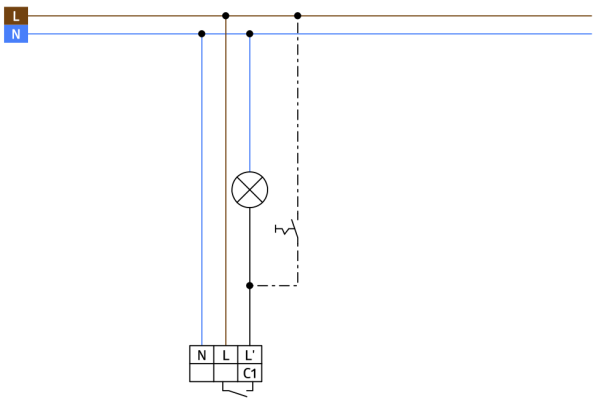
LED adjustment aid (without delay) for adjustment of the switch-on threshold

Light value and activation/deactivation delay may be set from the outside using the potentiometer

Double cable inlet from underneath possible

Wall and mast installation


43
80
96
60
B.E.G.


L
N
N
L
L'
C1