B.E.G. LUXOMAT® net



IM4-BMS DALI-2

Prod.No. 93359 EAN: 4007529933594

DALI-2 Flush-Mount Input Module with four freely configurable inputs for potential-free pushbutton and switch contacts

Order data

Designation	Colour	Art.No
IM4-BMS DALI-2	transparent	93359

Technical data

Voltage:	via DALI Bus, max. 22 V
Dimensions:	38 x 38 x 12 mm
Settings:	via DALI bus and any software that supports the configuration of existing instance types in accordance with IEC62386
Typ. power input:	4.6 mA
Settling time:	200 ms
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	transparent
Cable length:	50 cm

Product information

Binary DALI input device for installation in in-wall sockets

4 inputs for conventional push buttons, freely configurable

DALI-2 certified product

Powered via DALI bus

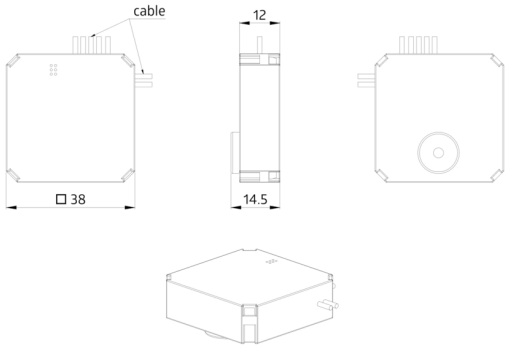
DALI multimaster technology according to IEC 62386 part 103

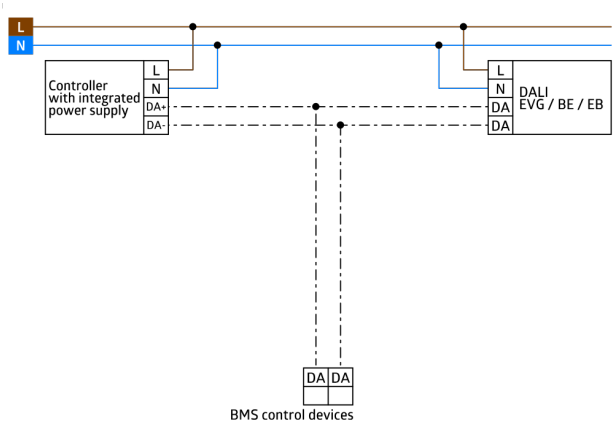
Instances 0 to 3 provide information per input in accordance with IEC 62386 Part 301 on the DALI bus

From firmware V3.9 onwards: Instances 4 to 7 provide binary information (0 or 1) for each input on the DALI bus in accordance with IEC 62386 Part 302. These instances are inactive by default and can be used via a generic device configuration instead of instances 0 to 3.

Integrated power LED that flashes in identification mode

Integrated piezo buzzer that emits audio signals in identification mode


cable
12
□ 38
14.5


L
N
Controller with integrated power supply
L
N
DA+
DA-
L
N
DA
DA
DALI EVG / BE / EB
DA
DA
BMS control devices