

B.E.G.**LUXOMAT®**

Indoor 180-T covering not included

Prod.No. 92664 EAN: 4007529926640

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: covering not included 70 x 70 x 61 mm
- Power consumption: approx. 1.3 W

Order data

Designation	Colour	Art.No
Indoor 180-T covering not included	-	92664

Accessories

Designation	Colour	Art.No
Blind Indoor 180		33233
Frame IP20 Indoor 180	pure white	92630
Frame IP20 Indoor 180	traffic white	92631
Frame IP20 Indoor 180	anthracite	92634
Frame IP54 Indoor 180	pure white	92139
Frame IP20 Indoor 180	oyster white	92632
Frame IP20 Indoor 180	silver	92633
Surface mounting socket Indoor 180	pure white	92141
Central plate Indoor 180 45x45	traffic white	38947
Central plate Indoor 180 45x45	oyster white	39076
Central plate Indoor 180 55 x 55 mm	pure white	39222

Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	covering not included 70 x 70 x 61 mm
Power consumption:	approx. 1.3 W
Detection area:	horizontal 180° (Wall mounting) max. 10 m across max. 3 m towards
Range:	
Monitored area (tangential movement):	150 m ² / 1.1 m mounting height
Mounting height min./max./recommended:	1 m / 2.2 m / 1.1 m
Degree / class of protection:	IP20 / Class II
Impact strength:	IK05
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	-
Channel 1 (lighting control)	
Switching power:	300 W, cos φ = 1 / min. 40 W not suitable for : LED loads
Follow-up time:	15 sec – 16 min, Pulse
Switch-on threshold:	10 – 2000 Lux

Product information

Wall motion detector with acoustic sensor

Triac version with 2-wire technology, no neutral

Acoustic sensor independently adjustable

Only for resistive loads


Noise automatically extends follow-up time

Available with covering (centre plate dimensions 60 x 60 mm)
or without covering for use with covering (centre plate
dimensions 50 x 50 mm) in 5 different colours

In combination with centre plates usable with current frame
systems of various manufacturers

B.E.G. frames and centre plates for combination with other
frame systems available

Application examples: monitoring of public lavatories,
corridors, archive rooms, conference rooms

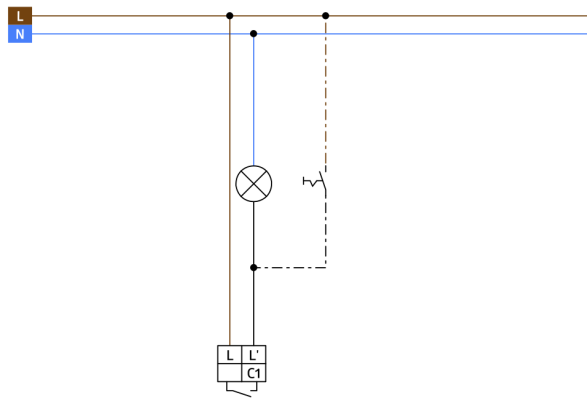

Accessories




Blind Indoor 180
Art.No: 33233

Housing: polycarbonate, UV-resistant
Material color: white



Frame IP20 Indoor 180
Art.No: 92630

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180
Art.No: 92631

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180
Art.No: 92634

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Frame IP54 Indoor 180
Art.No: 92139

Dimensions: 87 x 87 mm
Degree / class of protection: IP54
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180
Art.No: 92632

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180
Art.No: 92633

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Surface mounting socket Indoor 180
Art.No: 92141

Dimensions: 88 x 88 x 42 mm
Degree / class of protection: IP54
Impact strength: IK05



Central plate Indoor 180 45x45
Art.No: 38947

Dimensions: 45 x 45 mm
Material color: traffic white mat,
similar to RAL9016




Central plate Indoor 180 45x45

Art.No: 39076

Dimensions: 45 x 45 mm

Housing: polycarbonate, UV-resistant

Material color: oyster white mat, similar to RAL1013



Central plate Indoor 180 55 x 55 mm

Art.No: 39222

Dimensions: 55 x 55 mm

Housing: polycarbonate, UV-resistant

Material color: pure white glossy, similar to RAL9010