

B.E.G.**LUXOMAT®**

LC-Click 200

Prod.No. 91102 EAN: 4007529911028

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: 90 x 67 x 82 mm
- Power consumption: approx. 0.4 W

Order data

| Designation | Colour | Art.No |
|--------------|--------|--------|
| LC-Click 200 | white | 91102 |

Accessories

| Designation | Colour | Art.No |
|----------------------------------|-----------------|--------|
| RC-Arc extinction kit | white | 10880 |
| Mini-RC-Arc extinction kit | | 10882 |
| Wire basket BSK (Ø 164 x 143 mm) | white | 92467 |
| Pole holder | stainless steel | 93220 |
| Wall holder | white | 93222 |
| Wall holder | anthracite | 93221 |
| Frame LC | white | 91080 |

Technical data

| | |
|---|--|
| Voltage: | 110 - 240 V AC 50 / 60 Hz |
| Dimensions: | 90 x 67 x 82 mm |
| Power consumption: | approx. 0.4 W |
| Detection area: | horizontal 200° (Wall mounting) max. 12 m across max. 4 m towards |
| Range: | |
| Monitored area (tangential movement): | 250 m ² / 2.5 m mounting height |
| Mounting height min./max./recommended: | 2 m / 3 m / 2.5 m |
| Degree / class of protection: | IP44 / Class II |
| Ambient temperature: | -25 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | white mat, similar to RAL9010 |

Channel 1 (lighting control)

| | |
|----------------------|---|
| Switching power: | 1000 W, $\cos \varphi$ = 1 500 VA, $\cos \varphi$ = 0.5 400 W LED |
| Type of contact (k): | 1x μ -contact, NO contact |
| Follow-up time: | 4 sec - 10 min |
| Switch-on threshold: | 10 - 300 Lux |


Product information

Motion detector with detection area of 200°

Adjustable ball head

Simple mounting thanks to plug base

Detection area can be restricted with blinds

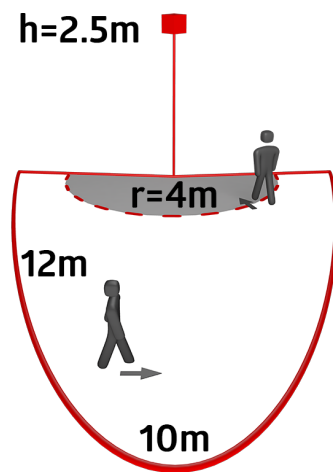

Accessories



RC-Arc extinction kit
Art.No: 10880

Voltage: 230 V AC ±10%
Dimensions: 38 x 12 x 26 mm
Degree / class of protection: IP20 / Class II



Mini-RC-Arc extinction kit
Art.No: 10882

Voltage: 230 V AC ±10%
Dimensions: 50 x 23 x 8 mm
Degree / class of protection: IP20 / Class II



Wire basket BSK (Ø 164 x 143 mm)
Art.No: 92467

Dimensions: Ø 164 x 143 mm
Impact strength: IK09
Housing: coated steel basket



Pole holder
Art.No: 93220

Dimensions: 188 x 98 x 134 mm
Housing: stainless steel
Material color: stainless steel



Wall holder
Art.No: 93222

Dimensions: 188 x 98 x 134 mm
Material color: white



Wall holder
Art.No: 93221

Dimensions: 188 x 98 x 134 mm
Material color: anthracite



Frame LC
Art.No: 91080

Dimensions: 78 x 78 x 13 mm
Housing: polycarbonate, UV-resistant
Material color: white