



PD11-KNX-FLAT-FC

Prod.No. 92893 EAN: 4007529928934

- Voltage: via KNX BUS
- Dimensions: Ø 52 x 48 mm
- Typ. power input: 8 mA

Order data

Designation	Colour	Art.No
PD11-KNX-FLAT-FC		92893

Accessories

Designation	Colour	Art.No
In-wall mounting set / PD11	white	92833
Cover ring PD11 (52 mm)	black	92537
Cover ring PD11	white	92692
Square design frame PD11-FC	white	92994

Technical data

Voltage:	via KNX BUS
Dimensions:	Ø 52 x 48 mm
Typ. power input:	8 mA
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 9 m across
Range:	max. Ø 6 m towards max. Ø 3 m seated
Monitored area (tangential movement):	63 m ² / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 5 m / 2.5 m
Degree / class of protection:	IP54 / Class II
Ambient temperature:	-25 °C to +55 °C
Housing:	polycarbonate, UV-resistant white mat,
Material color:	similar to RAL9010
Outputs:	24
Brightness set value:	5 - 1200 Lux
Light measuring:	Mixed light measuring

Product information

Low profile KNX occupancy detector with integrated KNX bus connector

When using the product database B.E.G._Praesenzmelder_928xx_V5.0, the following operation modes are available: 1. Full automatic mode 2. Semi-automatic mode 3. Slave mode 4. Occupancy-independent regulating mode

When using the product database B.E.G._Praesenzmelder_928xx_V5.0, the following operation modes are available:

1. Full automatic mode
2. Semi-automatic mode
3. Slave mode
4. Occupancy-independent regulating mode

Up to three additional switching channels – selectively either daylight-dependent or not

Set values and follow-up times can be changed for all channels using communication objects

Burn-in function with adjustable burn-in time from 1 to 100 hours

With activatable motion LED, deactivatable via ETS parameter, communication object or remote control

Spring clips for quick and easy installation in suspended ceilings

Settings via ETS 3 and 4

The product database for import into the ETS database can be downloaded from the B.E.G. homepage.


Spring clips for quick and easy installation in suspended ceilings

Includes blinds and clamp ring for installation into light fittings

With accessories for flush-mounting in ceiling and exposed concrete

Typical applications:

Offices, conference rooms, schools, nursery schools, hospitals

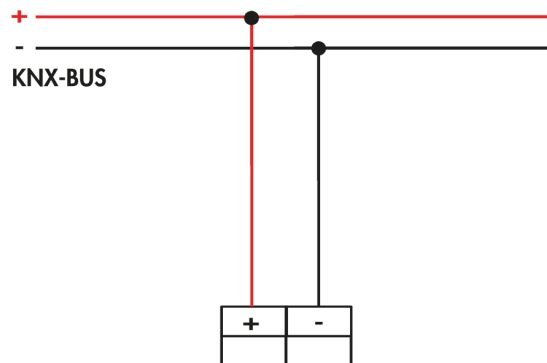

Accessories



In-wall mounting set / PD11

Art.No: 92833


Dimensions: Ø 104 mm
Material color: white



Square design frame PD11-FC

Art.No: 92994

Dimensions: 54 x 54 x 2.6 mm
Housing: polycarbonate, UV-resistant
Material color: white mat, similar to RAL9010



Cover ring PD11 (52 mm)

Art.No: 92537

Dimensions: Ø 52 x 3 mm
Housing: polycarbonate, UV-resistant
Material color: black, similar to RAL9005



Cover ring PD11

Art.No: 92692

Dimensions: Ø 100 x 3 mm
Housing: polycarbonate, UV-resistant
Material color: white mat, similar to RAL9010