

B.E.G.**LUXOMAT[®] net**

PD11-KNXs-FLAT-DX-FC Set 93523-92833-92121

- Voltage: via KNX BUS
- Dimensions: $\varnothing 52 \times 48 \text{ mm} + \varnothing 104 \text{ mm}$
(92833)
- Typ. power input: 12 mA

Order data


| Designation | Colour | Art.No |
|------------------------------|--------|--------|
| PD11-KNXs-FLAT-DX-FC | white | 93523 |
| In-wall mounting set / PD11 | white | 92833 |
| Surface mounting socket PD11 | white | 92121 |

Technical data

| | |
|---|---|
| Voltage: | via KNX BUS |
| Dimensions: | Ø 52 x 48 mm + Ø 104 mm (92833) |
| Typ. power input: | 12 mA |
| Detection area: | horizontal 360° (Ceiling mounting) max. Ø 9 m across max. Ø 6 m towards max. Ø 3 m seated |
| Range: | |
| Monitored area (tangential movement): | 63 m ² / 2.5 m mounting height |
| Mounting height min./max./recommended: | 2 m / 5 m / 2.5 m |
| Degree / class of protection: | IP54 / Class III + IP54 (92121) |
| Impact strength: | IK02 |
| Temperature measurement range: | -5 °C to +45 °C |
| Ambient temperature: | -25 °C to +55 °C |
| Housing: | polycarbonate, UV-resistant white mat, similar to RAL9010 + white (92121) |
| Material color: | |
| Number of light sensors: | 1 |
| Number of PIR sensors: | 1 |
| KNX TP 256: | Yes |
| KNX Secure: | Yes |
| Orientation light: | 5 - 100 % / OFF / 1 min - 255 min |
| Night light: | 5 - 100 % |
| Brightness set value: | 5 - 2000 Lux |

Product information

Set : PD11-KNXs-FLAT-DX-FC + In-wall mounting set /
PD11 white + Surface mounting socket PD11 white

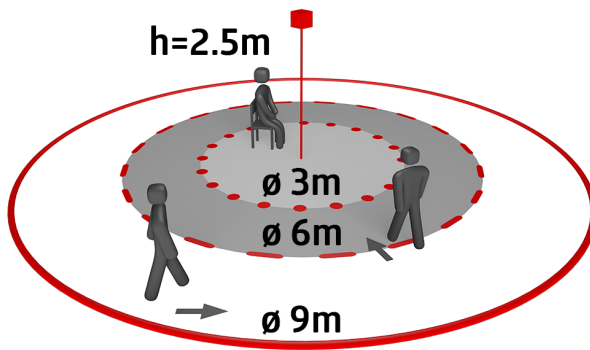

Set items

To receive the bundle according to the technical specification, please order the items listed.



PD11-KNXs-FLAT-DX-FC
Art.No: 93523

Voltage: via KNX BUS
Dimensions: Ø 52 x 48 mm
Typ. power input: 12 mA



In-wall mounting set / PD11
Art.No: 92833

Dimensions: Ø 104 mm
Material color: white



Surface mounting socket PD11
Art.No: 92121

Degree / class of protection: IP54
Housing: polycarbonate, UV-resistant
Material color: white