



## PD11-KNXs-FLAT-DX-FC Set 93523-92833-92537

- Voltage: via KNX BUS
- Dimensions:  $\varnothing 52 \times 48 \text{ mm} + \varnothing 104 \text{ mm}$  (92833) +  $\varnothing 52 \times 3 \text{ mm}$  (92537)
- Typ. power input: 12 mA

### Order data


Designation	Colour	Art.No
PD11-KNXs-FLAT-DX-FC	white	93523
In-wall mounting set / PD11	white	92833
Cover ring PD11 (52 mm)	black	92537

## Technical data

Voltage:	via KNX BUS
Dimensions:	<b>Ø 52 x 48 mm + Ø 104 mm (92833) + Ø 52 x 3 mm (92537)</b>
Typ. power input:	12 mA
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 9 m across max. Ø 6 m towards max. Ø 3 m seated
Range:	
Monitored area (tangential movement):	63 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 5 m / 2.5 m
Degree / class of protection:	IP54 / Class III
Impact strength:	IK02
Temperature measurement range:	-5 °C to +45 °C
Ambient temperature:	-25 °C to +55 °C
Housing:	polycarbonate, UV-resistant
Material color:	<b>black, similar to RAL9005 (92537)</b>
Number of light sensors:	1
Number of PIR sensors:	1
KNX TP 256:	Yes
KNX Secure:	Yes
Orientation light:	5 - 100 % / OFF / 1 min - 255 min
Night light:	5 - 100 %
Brightness set value:	5 - 2000 Lux

## Product information

Set : PD11-KNXs-FLAT-DX-FC + In-wall mounting set / PD11 white + Cover ring PD11 (52 mm) black, similar to RAL9005

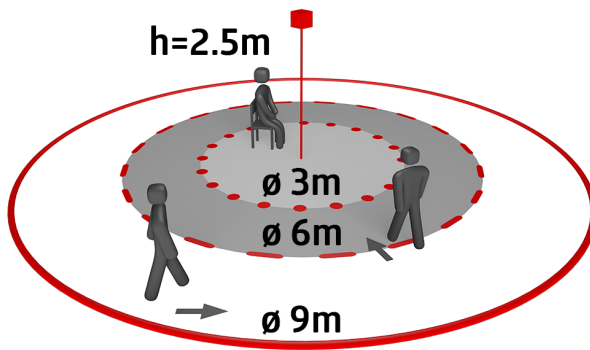

## Set items

To receive the bundle according to the technical specification, please order the items listed.




**PD11-KNXs-FLAT-DX-FC**  
Art.No: 93523

Voltage: via KNX BUS  
Dimensions: Ø 52 x 48 mm  
Typ. power input: 12 mA



**In-wall mounting set / PD11**  
Art.No: 92833

Dimensions: Ø 104 mm  
Material color: white



**Cover ring PD11 (52 mm)**  
Art.No: 92537

Dimensions: Ø 52 x 3 mm  
Housing: polycarbonate, UV-resistant  
Material color: black, similar to RAL9005