



## PD11-LTMS-RR-FC Set 92594-92833-92692

- Voltage: 16 – 48 V DC
- Dimensions: **Ø 52 x 60 mm + Ø 104 mm (92833) + Ø 100 x 3 mm (92692)**
- Power consumption: approx. 0.4 W

### Order data

Designation	Colour	Art.No
PD11-LTMS-RR-FC	white	92594
In-wall mounting set / PD11	white	92833
Cover ring PD11	white	92692

## Technical data

Voltage:	16 – 48 V DC
Dimensions:	<b>Ø 52 x 60 mm + Ø 104 mm (92833) + Ø 100 x 3 mm (92692)</b>
Power consumption:	approx. 0.4 W
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 9 m across max. Ø 6 m towards max. Ø 3 m seated
Range:	
Monitored area (tangential movement):	63 m² / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 5 m / 2.5 m
Degree / class of protection:	IP20 / Class II
Impact strength:	IK02
Measured light output:	0 – 1000 Lux, 0-10 V, approx. 10 mV/ Lux
Temperatur Ausgabe:	0 °C – +50 °C, 0-10 V, approx. 200 mV/°C
Ambient temperature:	0 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	<b>white mat, similar to RAL9010 (92692)</b>

### Channel 1 (lighting control, potential-free (dry))

Switching power:	48 V DC / 0.1 A , $\cos \varphi = 1$
Type of contact (k):	μ-contact, dry NO contact
Follow-up time:	5 sec – 60 min
Light measuring:	Mixed light measuring

## Product information

Set : PD11-LTMS-RR-FC + In-wall mounting set /  
PD11 white + Cover ring PD11 white mat, similar to  
RAL9010

Super flat multi-sensor for acquisition of data concerning  
occupancy (presence), temperature, and brightness

For integration into proprietary bus system




Output of motion detection via switch contact

Output of current light and temperature values as analogue  
voltage

Spring clips for quick and easy installation in suspended  
ceilings

Includes blinds and clamp ring for installation into light fittings

With accessories for flush-mounting in ceiling and exposed  
concrete

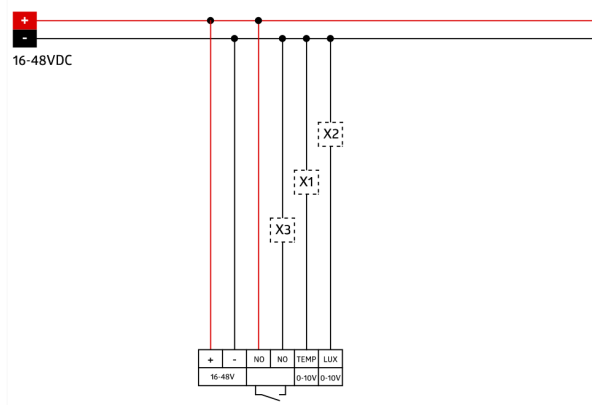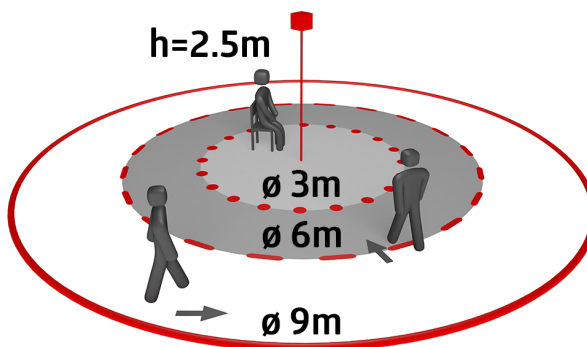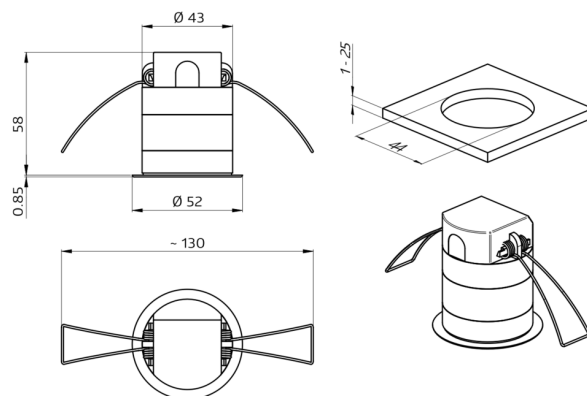

## Set items

To receive the bundle according to the technical specification, please order the items listed.



### **PD11-LTMS-RR-FC**

Art.No: 92594

Voltage: 16 – 48 V DC

Dimensions: Ø 52 x 60 mm

Power consumption: approx. 0.4 W



### **In-wall mounting set / PD11**

Art.No: 92833

Dimensions: Ø 104 mm

Material color: white



### **Cover ring PD11**

Art.No: 92692

Dimensions: Ø 100 x 3 mm

Housing: polycarbonate, UV-resistant

Material color: white mat, similar to RAL9010