

**B.E.G.****LUXOMAT®**

## PD11-M-1C-FLAT-FC

Prod.No. 92583 EAN: 4007529925834

- Voltage: 110 – 240 V AC 50 / 60 Hz
- Dimensions: Ø 52 x 60 mm
- Power consumption: approx. 0.3 W

### Areas of application

- entrance halls
- small offices
- corridors/hallways
- staircases
- open-plan offices
- conference rooms

### Order data

Designation	Colour	Art.No
PD11-M-1C-FLAT-FC	white	92583

### Accessories

Designation	Colour	Art.No
RC-Arc extinction kit	white	10880
Mini-RC-Arc extinction kit		10882
BLE-IR-Adapter	black	93067
IR-PD-1C	-	92520
IR-PD-1C-E	-	92077
IR-PD-Mini	-	92159
In-wall mounting set / PD11	white	92833
Cover ring PD11 (52 mm)	black	92537
Cover ring PD11	white	92692
Square design frame PD11-FC	white	92994

## Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	Ø 52 x 60 mm
Power consumption:	approx. 0.3 W
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 9 m across max. Ø 6 m towards max. Ø 3 m seated
Range:	63 m² / 2.5 m mounting height
Monitored area (tangential movement):	2 m / 5 m / 2.5 m
Mounting height min./max./recommended:	IP20 / Class II
Degree / class of protection:	IK02
Impact strength:	-25 °C to +50 °C
Ambient temperature:	polycarbonate, UV-resistant
Housing:	white mat, similar to RAL9010
Material color:	

### Channel 1 (lighting control)

Switching power:	2300 W, $\cos \varphi$ = 1 1150 VA, $\cos \varphi$ = 0.5 800 W LED max. inrush current $I_p$ (20 ms) = 165 A max. inrush current $I_p$ (200 µs) = 800 A
Type of contact (k):	1x µ-contact, NO contact with tungsten pre- make contact
Follow-up time:	5 min – 30 min, Pulse
Switch-on threshold:	20 – 2000 Lux
Light measuring:	Mixed light measuring

## Product information

Particularly flat occupancy detector without additional power supply

Visible portion when built into ceiling: height 0.85 mm

One channel for light switching

Manual switching via push-button possible

### Easy operation with remote control (required)

Version as master device

Detection area can be extended by using slave devices

Spring clips for quick and easy installation in suspended ceilings



Includes blinds and clamp ring for installation into light fittings

With accessories for flush-mounting in ceiling and exposed concrete

Factory settings 10 min and 500 lux

### Application examples:

entrance halls, small offices, corridors/hallways, staircases, open-plan offices, conference rooms

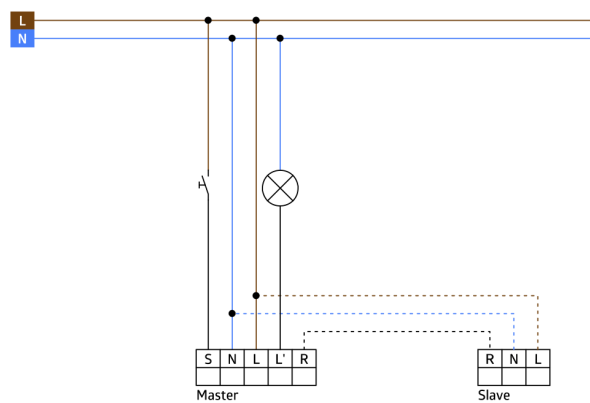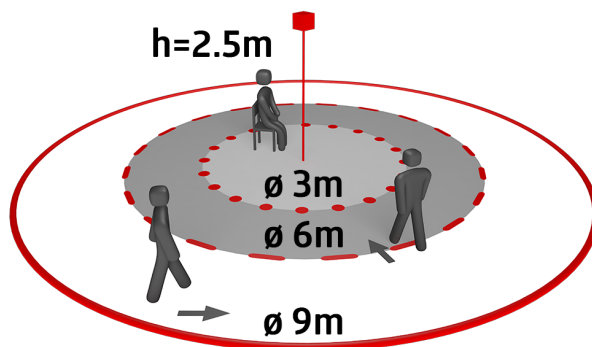

## Accessories



### RC-Arc extinction kit

Art.No: 10880

Voltage: 230 V AC ±10%  
 Dimensions: 38 x 12 x 26 mm  
 Degree / class of protection: IP20 / Class II



### Mini-RC-Arc extinction kit

Art.No: 10882

Voltage: 230 V AC ±10%  
 Dimensions: 50 x 23 x 8 mm  
 Degree / class of protection: IP20 / Class II



### BLE-IR-Adapter

Art.No: 93067

Dimensions: 40 x 55 x 103 mm  
 Material color: black  
 Frequency: 2.4 GHz ISM band, GFSK  
 0.2 dBm + 5.3 dBi = 5.5 dBm



### IR-PD-1C

Art.No: 92520

Battery: 3.0 V Lithium CR2032 (inclusive)  
 Dimensions: 80 x 60 x 8 mm  
 Material color: -



### IR-PD-1C-E

Art.No: 92077

Battery: 3.0 V Lithium CR2032 (inclusive)  
 Dimensions: 80 x 60 x 8 mm  
 Material color: -



### IR-PD-Mini

Art.No: 92159


Battery: 3.0 V Lithium CR2032 (inclusive)  
 Dimensions: 57 x 35 x 7 mm  
 Material color: -



### In-wall mounting set / PD11

Art.No: 92833

Dimensions: Ø 104 mm  
 Material color: white



### Cover ring PD11 (52 mm)

Art.No: 92537

Dimensions: Ø 52 x 3 mm  
 Housing: polycarbonate, UV-resistant  
 Material color: black, similar to RAL9005



### Cover ring PD11

Art.No: 92692

Dimensions: Ø 100 x 3 mm  
 Housing: polycarbonate, UV-resistant  
 Material color: white mat, similar to RAL9010



**Square design frame PD11-FC**

Art.No: 92994

Dimensions: 54 x 54 x 2.6 mm

Housing: polycarbonate, UV-resistant

Material color: white mat, similar to  
RAL9010