

B.E.G.**LUXOMAT®**

PD4-M-TRIO-C-3P-SM

Prod.No. 92747 EAN: 4007529927470

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: Ø 125 x 85 mm
- Power consumption: approx. 0.5 W

Order data

| Designation | Colour | Art.No |
|--------------------|--------|--------|
| PD4-M-TRIO-C-3P-SM | white | 92747 |

Accessories

| Designation | Colour | Art.No |
|----------------------------------|-------------|--------|
| BLE-IR-Adapter | black | 93067 |
| IR-PD-1C | - | 92520 |
| IR-PD-1C-E | - | 92077 |
| IR-PD-Mini | - | 92159 |
| Wire basket BSK (Ø 200 x 90 mm) | white | 92199 |
| Socket IP54 PD4-TRIO-SM | white | 92386 |
| Wall holder PD4-SM | white | 92441 |
| Blinds PD4 | transparent | 92313 |
| Pendulum mounting set PD2/3/4 SM | white | 93179 |

Technical data

| | |
|----------------------------------------|----------------------------------------------------------------|
| Voltage: | 110 - 240 V AC 50 / 60 Hz |
| Dimensions: | Ø 125 x 85 mm |
| Power consumption: | approx. 0.5 W |
| Detection area: | horizontal 360° (Ceiling mounting) max. Ø 40 m across |
| Range: | max. Ø 20 m towards |
| Monitored area (tangential movement): | 250 m ² / 2.5 m mounting height |
| Mounting height min./max./recommended: | 2.4 m / 2.6 m / 2.5 m |
| Degree / class of protection: | IP20 / Class II |
| Impact strength: | IK04 |
| Ambient temperature: | -25 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | white mat, similar to RAL9010 |

Channel 1 (lighting control, potential-free (dry))

| | |
|----------------------|-------------------------------------------------------------|
| Switching power: | 2300 W, cos φ = 1 1150 VA, cos φ = 0.5 300 W LED |
| Type of contact (k): | 2x μ-contact, dry Contact NC with tungsten pre-make contact |
| Follow-up time: | 15 sec - 30 min, Pulse |
| Switch-on threshold: | 10 - 2000 Lux |
| Light measuring: | Mixed light measuring |

Product information

1-channel occupancy detector with two simultaneously operating relay outputs, which enable distribution to different phases

The switching channel with the two relay outputs closes when the operating voltage of the detector fails, so the lighting remains on as long as the two phases of the luminaires are supplied with power.

The device requires an operating voltage. The third phase can be used for this purpose.

Designed for corridors

Version as master device




Detection area can be extended by using slave devices

Manual switching via push-button possible

Additional functions can be set up using the optional remote control.

There are markings to ensure correct alignment during installation

Typical applications: Emergency power supply networks, e.g. in hospitals or data centres.

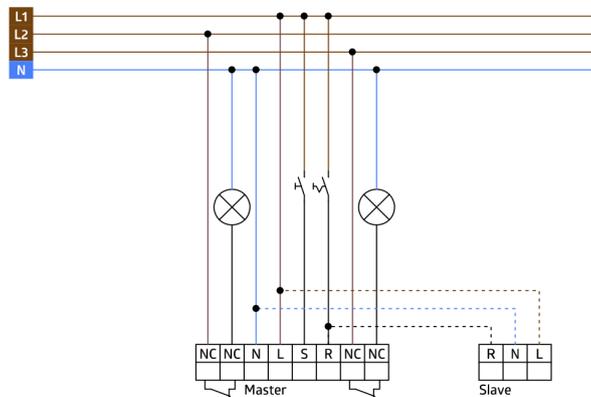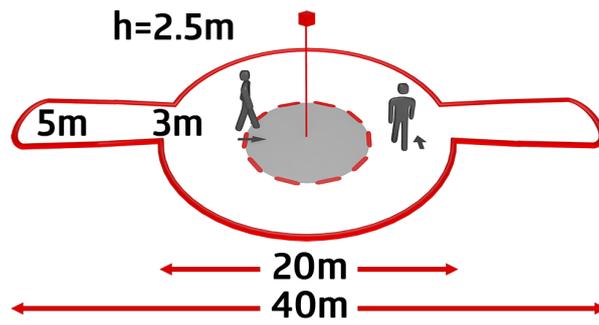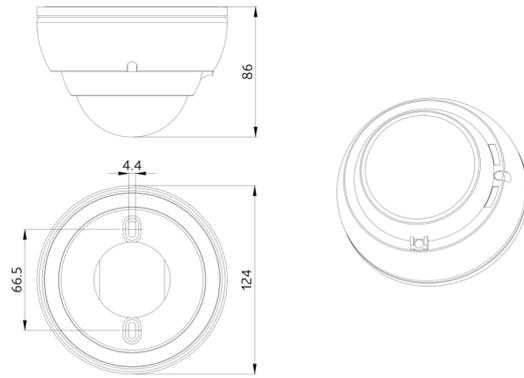


Accessories



BLE-IR-Adapter
Art.No: 93067

Dimensions: 40 x 55 x 103 mm
Material color: black
Frequency: 2.4 GHz ISM band, GFSK
0.2 dBm + 5.3 dBi = 5.5 dBm



IR-PD-1C
Art.No: 92520

Battery: 3.0 V Lithium CR2032 (inclusive)
Dimensions: 80 x 60 x 8 mm
Material color: -



IR-PD-1C-E
Art.No: 92077

Battery: 3.0 V Lithium CR2032 (inclusive)
Dimensions: 80 x 60 x 8 mm
Material color: -



IR-PD-Mini
Art.No: 92159

Battery: 3.0 V Lithium CR2032 (inclusive)
Dimensions: 57 x 35 x 7 mm
Material color: -




Wire basket BSK (Ø 200 x 90 mm)
Art.No: 92199

Dimensions: Ø 200 x 90 mm
Impact strength: IK09
Housing: coated steel basket



Socket IP54 PD4-TRIO-SM
Art.No: 92386

Degree / class of protection: IP54
Housing: polycarbonate, UV-resistant
Material color: white



Wall holder PD4-SM
Art.No: 92441

Dimensions: 130 x 100 x 53 mm
Housing: polycarbonate, UV-resistant
Material color: white



Blinds PD4
Art.No: 92313

Housing: Housing UV- and shockresistant Polycarbonate
Material color: transparent



Pendulum mounting set PD2/3/4 SM
Art.No: 93179

Dimensions: 1 : Ø 113 x 79 mm, 2 : Ø 113 x 34 mm
Housing: polycarbonate, UV-resistant
Material color: white, similar to RAL9010