



PD4N-KNXs-DX-FC Bundle 93516-93732

- Voltage: via KNX BUS
- Dimensions: FC= Ø 106 x 68 mm
- Typ. power input: 12 mA

Order data

Designation	Colour	Art.No
PD4N-KNXs-DX-FC Bundle 93516-93732	traffic white	1082644699

Technical data

Voltage:	via KNX BUS
Dimensions:	FC= Ø 106 x 68 mm
Typ. power input:	12 mA
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 24 m across max. Ø 8 m towards max. Ø 6.4 m seated
Range:	
Monitored area (tangential movement):	450 m² / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 10 m / 2.5 m
Degree / class of protection:	FC= IP20 / Class III
Impact strength:	IK04
Temperature measurement range:	-5 °C to +45 °C
Ambient temperature:	-25 °C to +55 °C
Housing:	polycarbonate, UV-resistant
Number of light sensors:	2
Material color:	traffic white mat, similar to RAL9016 (93732)
Number of PIR sensors:	4
KNX TP 256:	Yes
Orientation light:	5 – 100 % / OFF / 1 min – 255 min
Night light:	5 – 100 %
Brightness set value:	5 – 2000 Lux

Product information

Bundle : PD4N-KNXs-DX-FC + lens PD4N, Cover ring traffic white mat, similar to RAL9016
KNX occupancy detector with integrated KNX bus connector
KNX Secure ready
HCL/RGB control
Parameterisation from ETS 5 for integration into KNX systems
Individual adaption of detection sensitivity for each PIR sensor
PIR sensors can be deactivated individually
Direction of movement can be identified
Mixed light measurement using internal, external and remote (optional) light sensors
Intelligent semi-automatic mode, occupancy-independent regulating mode (photoelectric switch), full automatic mode
1 x Light (for regulating or switching), 1 x slave output, 3 separate HVAC-blocs
Regulation of up to three lighting groups using offset (external influence possible)
Short presence, self-adjusting follow-up time, corridor function
Various locking functions
Soft-start
Two logic modules
Recall of light scenes
Deactivatable status indicators
Temperature- and noise sensor
The product database for import into the ETS database can be downloaded from the B.E.G. homepage.
Detection area can be extended thanks to master-slave-mode
Extensive optimization options for light measurement
Measured light value is communicated to the bus
Adaption of dimming curve
Bidirectionally remote control-capable with the IR adapter and the B.E.G. smartphone app
PIN code
IR remote control-capable via IR remote control (optionally)

5 button remote control, programmable at choice (accessory)

Programming button (phys. address) can be operated via remote control

HVAC mode (0=automatic, 1=comfort, 2=stand-by, 3=economy, 4=antifreeze/heat protection)

Manual influence via external KNX push buttons possible

Function control (heartbeat, cyclical sending)

Occupancy simulation

Forced switch-off




Intelligent central-off function

Premonition of switch-off

Burn-in function for fluorescent lamps selectable from 1h till 100h

Behaviour upon bus voltage return definable at choice

Variable safety pause after switching off the lights

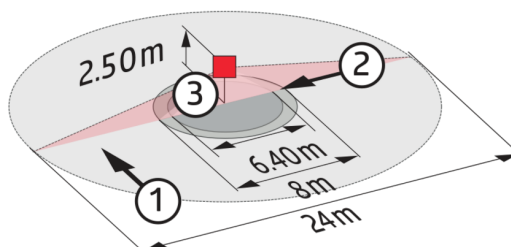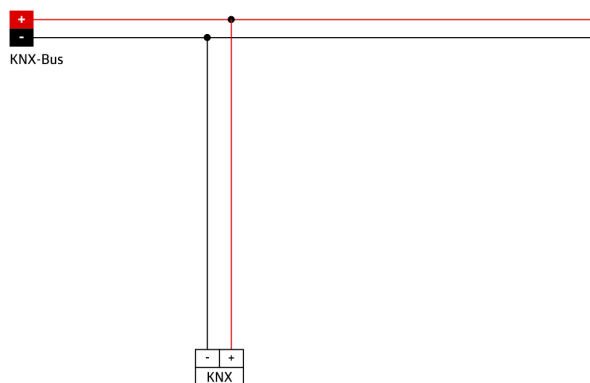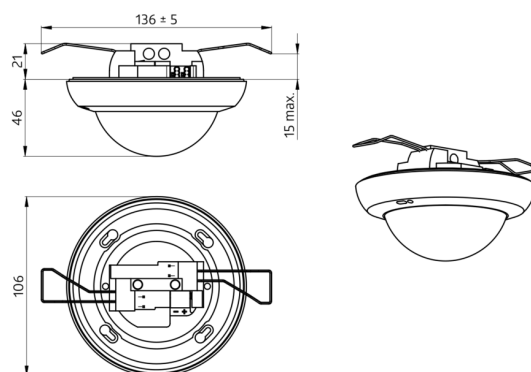

Bundle items

To receive the bundle according to the technical specification, please order the items listed.



PD4N-KNXs-DX-FC

Art.No: 93516

Voltage: via KNX BUS

Dimensions: FC= Ø 106 x 68 mm

Typ. power input: 12 mA



lens PD4N, Cover ring

Art.No: 93732

Detection area: horizontal 360° (Ceiling mounting)

Range: max. Ø 24 m across

max. Ø 8 m towards

max. Ø 6.4 m seated

Monitored area (tangential movement): 450 m² / 2.5 m mounting height