

B.E.G.**LUXOMAT®**

PD4N-M-DACO-PRO DALI-2 Set 93353-93465-93073-92 199

Occupancy detector with integrated DALI application controller for energy-efficient lighting control

DALI-2 certified product

Integrated DALI power supply and 4 push-button inputs

Areas of application

- small offices
- open-plan offices

Order data

Designation	Colour	Art.No
PD4N-M-DACO-PRO DALI-2	white	93353
SM socle mounting set IP54 PD4N H	white	93465
Corridor lens PD4N type A	white	93073
Wire basket BSK (Ø 200 x 90 mm)	white	92199

Technical data

Voltage:	230 V AC $\pm 10\%$ 50 Hz
Dimensions:	Ø 200 x 90 mm (92199)
Power consumption:	approx. 2 W
Slave devices:	up to 8
Detection area:	horizontal 360° (Ceiling mounting) (93073) max. Ø 40 m across max. Ø 20 m towards (93073)
Range:	250 m² / 2.5 m mounting height (93073)
Monitored area (tangential movement):	2.4 m / 2.6 m / 2.5 m (93073)
Mounting height min./max./recommended:	IP54 (93465)
Degree / class of protection:	IK09 (92199)
Impact strength:	-25 °C to +50 °C
Ambient temperature:	polycarbonate, UV-resistant + coated steel basket (92199) white, similar to RAL9010 (93073)
Housing:	
Material color:	

Channel 1 (lighting control)

DALI output:	80 mA (guaranteed), 125 mA (max.), shut down mechanism DT5, DT6, DT7, DT8-Tc (HCL only possible with DT8-Tc, 2700 - 6500 K) B.E.G. BMS (motion detection, measured light output)
Supported control gear:	1 min - 150 min 5 - 100 % / OFF / 1 min - 255 min / ∞
Supported control devices:	10 - 2500 Lux
Follow-up time:	Mixed light measuring
Orientation light:	
Brightness set value:	
Light measuring:	

Product information

Set : PD4N-M-DACO-PRO DALI-2 + SM socle
mounting set IP54 PD4N H white, similar to RAL9010
+ Corridor lens PD4N type A white, similar to
RAL9010 + Wire basket BSK (Ø 200 x 90 mm) white

Occupancy detector with integrated DALI application
controller for energy-efficient lighting control

DALI-2 certified product

Integrated DALI power supply and 4 push-button inputs

Adjustable communication mode "Broadcast" (1 light zone,
without addressing) or "Multicast" (several light zones, HVAC,
with addressing)

Up to 8 lighting groups can be created, with up to 4 profiles
and 2 scenes possible per group

Manual switching or dimming via conventional pushbuttons

Quick commissioning and maintenance processes via
Smartphone/Tablet App (Android, iOS) - Bluetooth required

Expandable with up to 8 B.E.G. BMS multi-sensors

Support for DALI-2 push buttons

Semi-automatic, full automatic, presence-independent or
light-independent mode adjustable

Adjustable regulation dynamics (minimum and maximum
values)

Over-the-air (OTA) firmware update: the firmware can be
conveniently updated remotely without the need for cables

Adjustable speed and delay of the regulation

Mixed light measurement with internal and external light
sensor

DALI output power can be increased with accessories

Integrated daylight harvesting circuit (or switch output)

Adjustable switch-on value

Last value - Reminder function for switch-on value

Adjustable brightness set value and reflection factor

Indication of the current light sensor value in the B.E.G. One
App

Self-check and display of device errors in the B.E.G. One App

Status LEDs can be activated / deactivated

PIN code

Corridor function - Deactivates the possibility to switch off the
light via the push-button



Partition wall function: In order to be able to respond to changes in room geometry, B.E.G. BMS detectors can be used to flexibly adjust the lighting groups of two rooms

Number of DALI participants can be determined quickly and reliably via the B.E.G. Online DALI Line Planner

Factory setting 10 min follow-up time and 500 lux brightness set value

Including pre-assembled spring clamp with strain relief and contact protection cap for recessed ceiling mounting

Accessory for surface mounting available

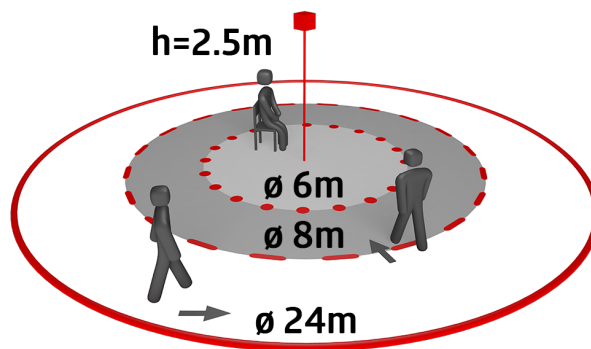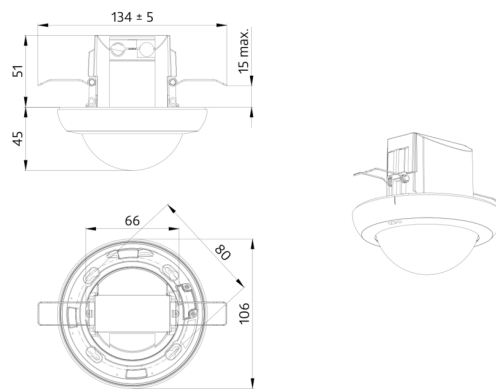

Set items

To receive the bundle according to the technical specification, please order the items listed.



PD4N-M-DACO-PRO DALI-2

Art.No: 93353

Voltage: 230 V AC $\pm 10\%$ 50 Hz

Dimensions: $\varnothing$ 84 x 85 mm

Power consumption: approx. 2 W



SM socle mounting set IP54 PD4N H

Art.No: 93465

Dimensions: $\varnothing$ 110 x 45 mm

Degree / class of protection: IP54

Material color: white, similar to
RAL9010



Corridor lens PD4N type A


Art.No: 93073

Detection area: horizontal 360° (Ceiling
mounting)

Range: max. $\varnothing$ 40 m across

max. $\varnothing$ 20 m towards

Monitored area (tangential movement):
250 m² / 2.5 m mounting height



Wire basket BSK ($\varnothing$ 200 x 90 mm)

Art.No: 92199

Dimensions: $\varnothing$ 200 x 90 mm

Impact strength: IK09

Housing: coated steel basket