


# SA4 - 230 / 16 / H / KNX REG

Prod.No. 90136 EAN: 4007529901364

Switching actuator for switching loads

The switching contacts are optimised for capacitive loads

Manual switches for switching without bus tension

## Order data

| Designation | Colour | Art.No |
|---|---|---|
| SA4 - 230 / 16 / H / KNX REG | grey | 90136 |

## Technical data

| | |
|---|---|
| Voltage: | via KNX BUS |
| Dimensions: | 90 x 72 x 64 mm (4 TE) |
| Typ. power input: | 5 mA typical<br>20 mA max. |
| Power consumption: | 0.15 W |
| Degree / class of protection: | IP20 / Class II |
| Ambient temperature: | -5 °C to +45 °C |
| Material color: | grey |
| KNX TP 256: | Yes |
| Connections and wires: | 0.2 ... 4.0 mm² rigid<br>0.25 ... 2.5 mm² fine-wired (with or without ferrule) |
| **per channel** | |
| Switching power: | 3680 W, cos φ = 1<br>max. inrush current Ip (150 µs) = 600 A |
| Type of contact (k): | µ-contacts, dry NO contact |
| Outputs: | 90136= 4 switching outputs |

## Product information

Switching actuator for switching loads

DIN-rail mount device, width 72 mm (4TE,  SA4 - 230 / 16 /) or 144 mm (8 TE, SA8 - 230 / 16 /) for mounting on a DIN-rail (TH35 EN 60715) for installation in a switch cabinet

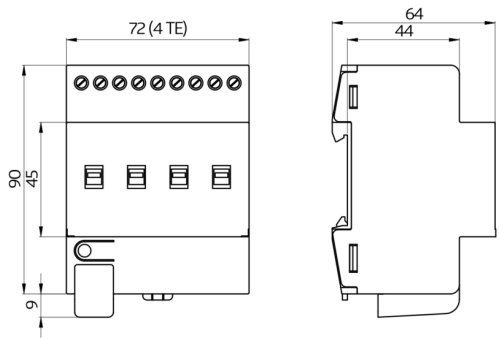
The device has four (SA**4** - 230 / 16 /) or eight (SA**8** - 230 / 16 /) independant potential-free NO contacts

The switching contacts are optimised for capacitive loads

Manual switches for switching without bus tension

The switching actuator is powered by the KNX bus, no additional power supply required

Connection of the outputs is realised by means of screw terminals


72 (4 TE)
64
44
90
45
9