B.E.G. LUXOMAT® net



# BIA-4-KNX REG

90405 EAN: 4007529904051

Compact binary input with 4 channels for controlling luminaires, blinds, etc

The inputs can be controlled via conventional switches with an external voltage of 12 to 230 V

Use as a pulse counter is possible

## Order data

| Designation | Colour | Art.No |
|---|---|---|
| BIA-4-KNX REG | - | 90405 |

## Technical data

| | |
|---|---|
| Voltage: | via KNX BUS |
| Dimensions: | 60 x 18 x 90 mm (1 TE) |
| Typ. power input: | 5 mA |
| Degree / class of protection: | IP20 / Class II |
| Ambient temperature: | -5 °C to +45 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | - |
| KNX TP 256: | Yes |
| Connections and wires: | 1 x Bus line: EIB/KNX bus terminal (black/red)<br>6 x Screw terminals<br>0.34 ... 2.5 mm² rigid<br>0.34 ... 2.5 mm² fine-wired |

## Product information

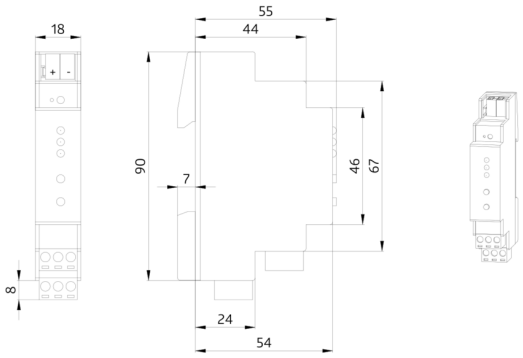
Compact binary input with 4 channels for controlling luminaires, blinds, etc

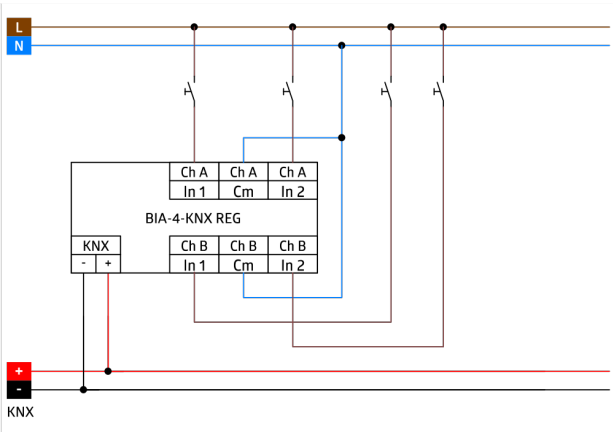
The inputs can be controlled via conventional switches with an external voltage of 12 to 230 V

Use as a pulse counter is possible

Two push-buttons and three LEDs enable local operation and visualisation of the unit's status

In addition to the input channels, the unit contains 16 independent logic or time functions


18
55
44
90
7
46
67
8
24
54


L
N
Ch A
Ch A
Ch A
In 1
Cm
In 2
BIA-4-KNX REG
KNX
-
+
Ch B
Ch B
Ch B
In 1
Cm
In 2
+
-
KNX