B.E.G. LUXOMAT® net



PSN-230 / 1280 / 30 / KNX REG

90215 EAN: 4007529902156

KNX bus power supply for DIN rail mounting with 1280 mA, integrated choke, additional unchoked 30V output, and LED status indicator.

Order data

Designation	Colour	Art.No
PSN-230 / 1280 / 30 / KNX REG	-	90215

Technical data

Voltage:	200 – 240 V AC 50 / 60 Hz
Dimensions:	90 x 54 x 72 mm (4 TE)
Output voltage:	KNX BUS / 30 V DC
Degree / class of protection:	IP20 / Class I
Ambient temperature:	-5 °C to +45 °C
Housing:	polycarbonate, UV-resistant (PC)
Material color:	-
Display elements:	Status LED Bus voltage Status LED Output current Status LED Reset
KNX TP 256:	Yes
Connections and wires:	KNX bus terminal black/red
Nominal current:	1280 mA
Nominal current (max.):	2620 mA

Product information

Compact KNX bus power supply SELV with integrated choke

Auxiliary voltage unchoked 30V DC

Various status indicators via LED

Device for DIN rail mounting in distribution boards

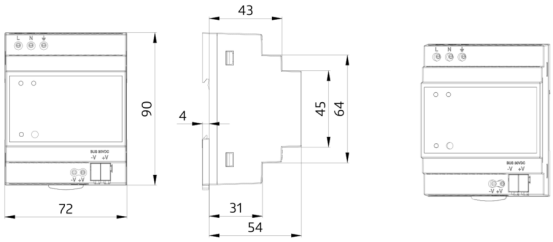
43
90
4
45
64
72
31
54

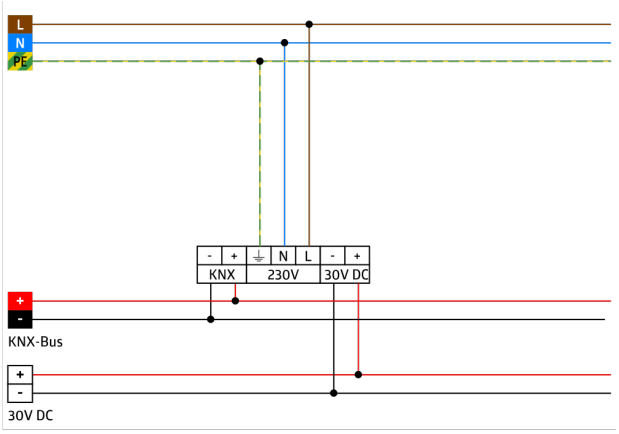
L
N
PE
- + ⏚ N L - +
KNX
230V
30V DC
+
-
KNX-Bus
+
-
30V DC