

**B.E.G.****SAFETYLUX®**

## DT32/6/3DALI-LED

Prod.No. 1210 EAN: 4007529012107

LED emergency light with single battery

Glass lamp in modern design

Bright and even illumination

### Order data

| Designation      | Colour | Art.No |
|------------------|--------|--------|
| DT32/6/3DALI-LED | white  | 1210   |

### Accessories

| Designation                    | Colour | Art.No |
|--------------------------------|--------|--------|
| BLE-IR-Adapter                 | black  | 93067  |
| IR-Adapter for Smartphones     | black  | 92726  |
| Pictogram two-sided/right-left | green  | 8860   |
| Pictogram DT32-LED down arrow  | green  | 8785   |
| Pictogram DT32-LED right arrow | green  | 8858   |
| Pictogram DT32-LED left arrow  | green  | 8859   |

## Technical data

|                               |   |
|-------------------------------|---|
| Voltage:                      | 230 V AC +/- 10% 50 Hz  |
| Dimensions:                   | 359 x 50 x 281  |
| Operation mode:               | Permanent operation, Wake up mode   |
| Luminous flux / intensity:    | LED circuit board 12 x 0.5 W<br>Colour temperature: 6500 K daylight white |
| Degree / class of protection: | IP20 / Class I  |
| Ambient temperature:          | 0 °C to +35 °C  |
| Housing:                      | aluminium profile<br>Side panels made of Polycarbonate                    |
| Material color:               | white, similar to RAL9016   |

### Single-battery luminaire


|                             |                       |
|-----------------------------|-----------------------|
| Accu:                       | NiMH 3.6 V<br>800 mAh |
| Nominal operation duration: | 3 h                   |

### Monitoring

|                     |                          |
|---------------------|--------------------------|
| Local surveillance: | automatic self-test      |
| Central monitoring: | Dali-Bus B.E.G.-DALI-SYS |

## Product information

- LED emergency light with single battery
- Glass lamp in modern design
- Bright and even illumination
- Environmentally friendly NiMH battery with deep discharge protection
- Bidirectionally remote control-capable with the IR adapter and the B.E.G. smartphone app
- Automatic self-test with a two-colour status LED
- Central monitoring option with B.E.G.-DALI-SYS via a DALI bus
- Incl. LED lamps, display panels and battery

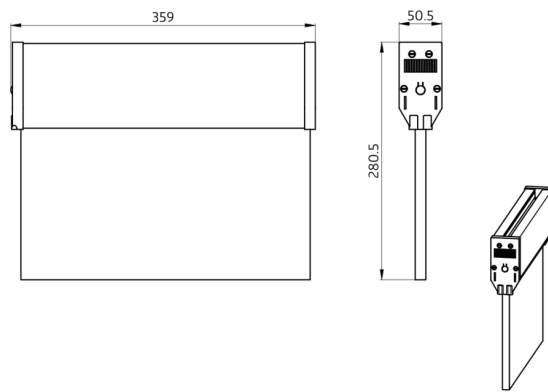

## Accessories



**BLE-IR-Adapter**  
Art.No: 93067

Dimensions: 40 x 55 x 103 mm  
Material color: black  
Frequency: 2.4 GHz ISM band, GFSK 0.2 dBm + 5.3 dBi = 5.5 dBm



**IR-Adapter for Smartphones**  
Art.No: 92726

Dimensions: 47 x 19 x 10 mm  
Degree / class of protection: IP20  
Ambient temperature: -20 °C to +40 °C



**Pictogram two-sided/right-left**  
Art.No: 8860

Dimensions: 170 x 330 x 1 mm  
Housing: Plastic  
Material color: green



**Pictogram DT32-LED down arrow**  
Art.No: 8785

Dimensions: 170 x 330 x 1 mm  
Housing: Plastic  
Material color: green



**Pictogram DT32-LED right arrow**  
Art.No: 8858

Dimensions: 170 x 330 x 1 mm  
Housing: Plastic  
Material color: green



**Pictogram DT32-LED left arrow**  
Art.No: 8859

Dimensions: 170 x 330 x 1 mm  
Housing: Plastic  
Material color: green