

B.E.G.**LUXOMAT®**

Indoor 180-R UK covering included

Prod.No. 92610 EAN: 4007529926107

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: 87 x 87 x 61 mm
- Output voltage: 110 - 240 V AC

Order data

Designation	Colour	Art.No
Indoor 180-R UK covering included	pure white	92610

Accessories

Designation	Colour	Art.No
Surface mounting socket Indoor 180	pure white	92141
Frame IP20 Indoor 180	pure white	92630
Frame IP20 Indoor 180	traffic white	92631
Frame IP20 Indoor 180	anthracite	92634
Frame IP54 Indoor 180	pure white	92139
Frame IP20 Indoor 180	oyster white	92632
Frame IP20 Indoor 180	silver	92633
Central plate Indoor 180 45x45	oyster white	39076
Central plate Indoor 180 45x45	traffic white	38947

Technical data



Voltage:	110 - 240 V AC 50 / 60 Hz
Dimensions:	87 x 87 x 61 mm
Output voltage:	110 - 240 V AC
Power consumption:	approx. 0.5 W
Detection area:	horizontal 180° (Wall mounting) max. 10 m across max. 3 m towards
Range:	
Monitored area (tangential movement):	150 m ² / 1.1 m mounting height
Mounting height min./max./recommended:	1 m / 2.2 m / 1.1 m
Degree / class of protection:	IP20 / Class II
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	pure white mat, similar to RAL9010

Channel 1 (lighting control)

Switching power:	2300 W, $\cos \varphi$ = null 1150 VA, $\cos \varphi$ = 0.5 800 W LED max. inrush current I_p (20 ms) = 165 A max. inrush current I_p (200 μ s) = 800 A
Follow-up time:	15 sec - 16 min, Pulse
Switch-on threshold:	40 - 2000 Lux

Product information

Wall motion detector with acoustic sensor
Relay version with three-wire technology
Acoustic sensor independently adjustable
Noise automatically extends follow-up time
With already mounted frame

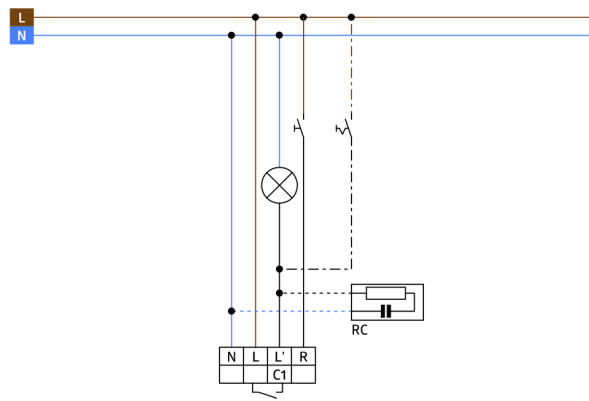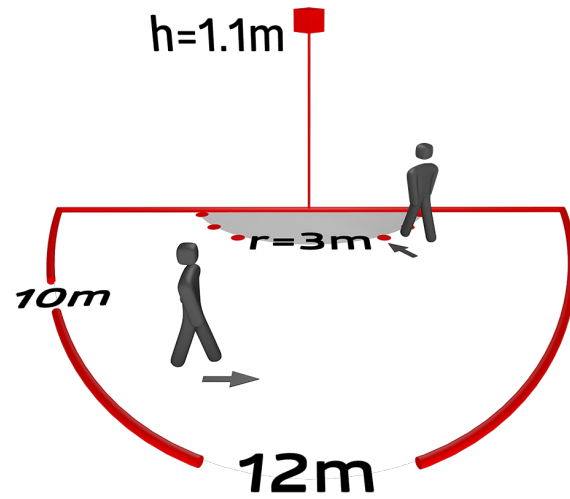

Accessories



Surface mounting socket Indoor 180

Art.No: 92141


Dimensions: 88 x 88 x 42 mm
Degree / class of protection: IP54
Impact strength: IK05



Frame IP20 Indoor 180

Art.No: 92630

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180

Art.No: 92631

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180

Art.No: 92634

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Frame IP54 Indoor 180

Art.No: 92139

Dimensions: 87 x 87 mm
Degree / class of protection: IP54
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180

Art.No: 92632

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180

Art.No: 92633

Dimensions: 86 x 86 mm
Degree / class of protection: IP20
Housing: polycarbonate, UV-resistant



Central plate Indoor 180 45x45

Art.No: 39076

Dimensions: 45 x 45 mm
Housing: polycarbonate, UV-resistant
Material color: oyster white mat, similar to RAL1013



Central plate Indoor 180 45x45

Art.No: 38947

Dimensions: 45 x 45 mm
Material color: traffic white mat, similar to RAL9016