

**B.E.G.****LUXOMAT®**

## Indoor 180-R UK covering included

Prod.No. 92610 EAN: 4007529926107

Wall motion detector with acoustic sensor

Relay version with three-wire technology

Acoustic sensor independently adjustable

### Order data

Designation	Colour	Art.No
Indoor 180-R UK covering included	pure white	92610

### Accessories

Designation	Colour	Art.No
Surface mounting socket Indoor 180	pure white	92141
Frame IP20 Indoor 180	pure white	92630
Frame IP20 Indoor 180	traffic white	92631
Frame IP20 Indoor 180	anthracite	92634
Frame IP54 Indoor 180	pure white	92139
Frame IP20 Indoor 180	oyster white	92632
Frame IP20 Indoor 180	silver	92633
Central plate Indoor 180 45x45	oyster white	39076
Central plate Indoor 180 45x45	traffic white	38947

## Technical data



Voltage:	110 - 240 V AC 50 / 60 Hz
Dimensions:	87 x 87 x 61 mm
Output voltage:	110 - 240 V AC
Power consumption:	approx. 0.5 W
Detection area:	horizontal 180° (Wall mounting)
Range:	max. 10 m across max. 3 m towards
Monitored area (tangential movement):	150 m <sup>2</sup> / 1.1 m mounting height
Mounting height min./max./recommended:	1 m / 2.2 m / 1.1 m
Degree / class of protection:	IP20 / Class II
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	pure white mat, similar to RAL9010

### Channel 1 (lighting control)

Switching power:	2300 W, $\cos \varphi$ = null 1150 VA, $\cos \varphi$ = 0.5 800 W LED max. inrush current $I_p$ (20 ms) = 165 A max. inrush current $I_p$ (200 $\mu$ s) = 800 A
Follow-up time:	15 sec - 16 min, Pulse
Switch-on threshold:	40 - 2000 Lux

## Product information

Wall motion detector with acoustic sensor  
Relay version with three-wire technology  
Acoustic sensor independently adjustable  
Noise automatically extends follow-up time  
With already mounted frame

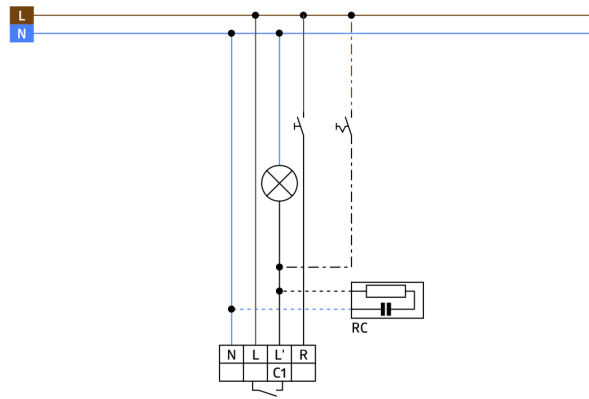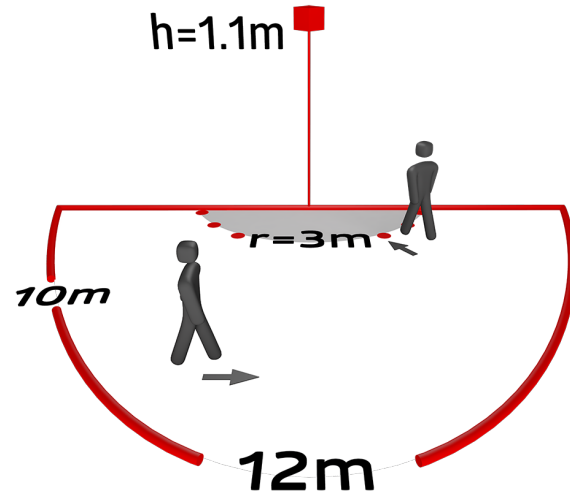

## Accessories



### Surface mounting socket Indoor 180

Art.No: 92141


Dimensions: 88 x 88 x 42 mm  
Degree / class of protection: IP54  
Impact strength: IK05



### Frame IP20 Indoor 180

Art.No: 92630

Dimensions: 86 x 86 mm  
Degree / class of protection: IP20  
Housing: polycarbonate, UV-resistant



### Frame IP20 Indoor 180

Art.No: 92631

Dimensions: 86 x 86 mm  
Degree / class of protection: IP20  
Housing: polycarbonate, UV-resistant



### Frame IP20 Indoor 180

Art.No: 92634

Dimensions: 86 x 86 mm  
Degree / class of protection: IP20  
Housing: polycarbonate, UV-resistant



### Frame IP54 Indoor 180

Art.No: 92139

Dimensions: 87 x 87 mm  
Degree / class of protection: IP54  
Housing: polycarbonate, UV-resistant



### Frame IP20 Indoor 180

Art.No: 92632

Dimensions: 86 x 86 mm  
Degree / class of protection: IP20  
Housing: polycarbonate, UV-resistant



### Frame IP20 Indoor 180

Art.No: 92633

Dimensions: 86 x 86 mm  
Degree / class of protection: IP20  
Housing: polycarbonate, UV-resistant



### Central plate Indoor 180 45x45

Art.No: 39076

Dimensions: 45 x 45 mm  
Housing: polycarbonate, UV-resistant  
Material color: oyster white mat, similar to RAL1013



### Central plate Indoor 180 45x45

Art.No: 38947

Dimensions: 45 x 45 mm  
Material color: traffic white mat, similar to RAL9016