

**B.E.G.**

**LUXOMAT®**



## Indoor 180-TR covering included Set 92650-92141

- Voltage: 110 – 240 V AC 50 / 60 Hz Power supply via staircase switch
- Dimensions: **88 x 88 x 42 mm (92141)**
- Power consumption: approx. 0.8 W

### Order data

#### Designation

Indoor 180-TR covering included  
Surface mounting socket Indoor  
180

#### Colour

pure white  
pure white

#### Art.No

92650  
92141

### Areas of application

- staircases

## Technical data

Voltage:	110 - 240 V AC 50 / 60 Hz Power supply via staircase switch
Dimensions:	<b>88 x 88 x 42 mm (92141)</b>
Power consumption:	approx. 0.8 W
Detection area:	horizontal 180° (Wall mounting)
Range:	max. 10 m across max. 3 m towards
Monitored area (tangential movement):	150 m <sup>2</sup> / 1.1 m mounting height
Mounting height min./max./recommended:	1 m / 2.2 m / 1.1 m
Degree / class of protection:	<b>IP54 (92141)</b>
Impact strength:	IK05
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	pure white mat, similar to RAL9010
<b>Channel 1</b>	
Switching power:	0.2 A / 230 V
Follow-up time:	Pulse duration: 0.1 s; Deactivation of light evaluation 1 min - 10 min
Switch-on threshold:	2 - 2000 Lux

## Product information

Set : Indoor 180-TR covering included + Surface mounting socket Indoor 180 pure white mat, similar to RAL9010

Wall motion detector designed for stair light timer switches


Triac version with 2-wire technology, no neutral

Guarantees correct operation with the SCT1 (max. 10 sensors per unit)

Available with covering (centre plate dimensions 60 x 60 mm) or without covering for use with covering (centre plate dimensions 50 x 50 mm) in 5 different colours

In combination with centre plates usable with current frame systems of various manufacturers

B.E.G. frames and centre plates for combination with other frame systems available

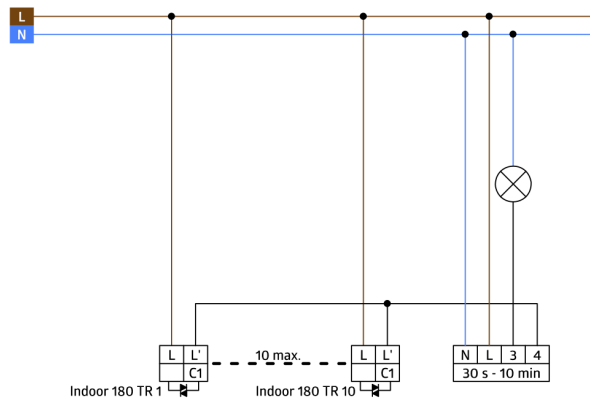

## Set items

To receive the bundle according to the technical specification, please order the items listed.



### **Indoor 180-TR covering included**

Art.No: 92650

Voltage: 110 – 240 V AC 50 / 60 Hz Power supply via staircase switch

Dimensions: covering included 87 x 87 x 61 mm

Power consumption: approx. 0.8 W



### **Surface mounting socket Indoor 180**

Art.No: 92141

Dimensions: 88 x 88 x 42 mm

Degree / class of protection: IP54

Impact strength: IK05