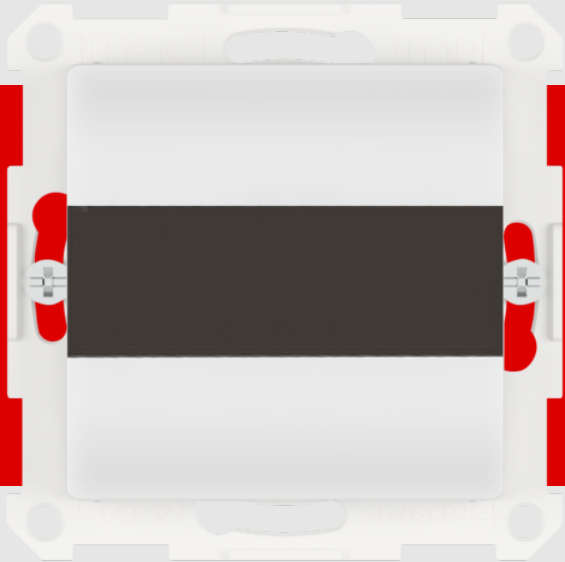


B.E.G.**LUXOMAT®**

IndoorHF-M-1C

Prod.No. 93263 EAN: 4007529932634

- Voltage: 230 V AC 10% 50 / 60 Hz
- Dimensions: 55 x 55 x 36 mm
- Power consumption: approx. 0.2 W

Order data

Designation	Colour	Art.No
IndoorHF-M-1C	traffic white	93263

Accessories

Designation	Colour	Art.No
BLE-IR-Adapter	black	93067

Technical data

Voltage:	230 V AC 10% 50 / 60 Hz
Dimensions:	55 x 55 x 36 mm
Power consumption:	approx. 0.2 W
Detection area:	horizontal 180° (Wall mounting) max. 8 m x 4 m across max. 8 m x 4 m towards
Range:	
Monitored area (tangential movement):	32 m ² / 1.1 m mounting height
Mounting height min./max./recommended:	1 m / 1.2 m / 1.1 m
Degree / class of protection:	IP20 / Class II
Impact strength:	IK05
Ambient temperature:	5 °C to +50 °C
Housing:	polycarbonate, UV-resistant traffic white glossy, similar to RAL9016
Material color:	

Channel 1 (lighting control)

Switching power:	2300 W, $\cos \varphi$ = 1 1150 VA, $\cos \varphi$ = 0.5 800 W LED max. inrush current I_p (20 ms) = 165 A
Type of contact (k):	1x μ -contact, NO contact
Follow-up time:	10 sec - 30 min, Pulse
Brightness set value:	10 - 2500 Lux
Radar / HF technology:	60 GHz

Product information

Wall-mounted presence detector with HF technology


Relay version with three-wire technology

Manual switching via push-button possible

Available without frame for combination with cover frame
(inner cover dimensions 55 x 55 mm)

Factory setting 10 min follow-up time and 500 lux brightness
set value

Application examples: monitoring of public lavatories,
corridors, archive rooms, conference rooms

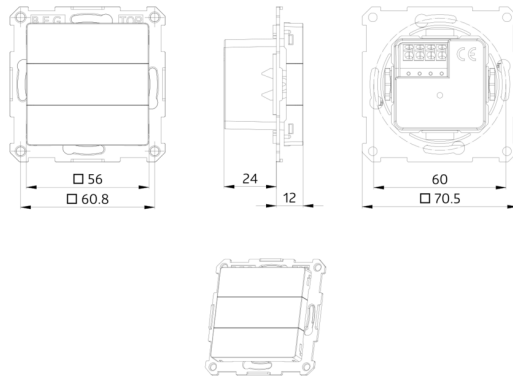

Accessories



BLE-IR-Adapter

Art.No: 93067

Dimensions: 40 x 55 x 103 mm

Material color: black

Frequency: 2.4 GHz ISM band, GFSK 0.2 dBm + 5.3 dBi = 5.5 dBm