

B.E.G.**LUXOMAT®**

LC-Click-N 140 UK 2.000 W

Prod.No. 93041 EAN: 4007529930418

Motion detector with 140° detection area and
180° creep protection

Adjustable ball head

Detection area can be restricted with blinds

Order data

| Designation | Colour | Art.No |
|---------------------------|--------|--------|
| LC-Click-N 140 UK 2.000 W | white | 93041 |

Accessories

| Designation | Colour | Art.No |
|-------------------------------------|-----------------|--------|
| RC-Arc extinction kit | white | 10880 |
| Mini-RC-Arc extinction kit | | 10882 |
| Wire basket BSK (Ø 164 x 143 mm) | white | 92467 |
| Pole holder with weather protection | stainless steel | 93220 |
| Wall holder with weather protection | white | 93222 |
| Wall holder with weather protection | anthracite | 93221 |
| Blinds LC-Click-N | | 32699 |

Technical data

| | |
|--|--|
| Voltage: | 110 - 240 V AC 50 / 60 Hz |
| Dimensions: | 103 x 78 x 84 mm |
| Power consumption: | approx. 0.4 W |
| Detection area: | horizontal 140° (Wall mounting) max. 12 m across max. 4 m towards max. 2 m creep protection |
| Range: | |
| Monitored area (tangential movement): | 170 m ² / 2.5 m mounting height |
| Mounting height min./max./recommended: | 2 m / 3 m / 2.5 m |
| Degree / class of protection: | IP54 / Class II |
| Impact strength: | IK04 |
| Ambient temperature: | -25 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | white mat, similar to RAL9010 |

Channel 1 (lighting control)

| | |
|----------------------|--|
| Switching power: | 2000 W, $\cos \varphi = 1$ 1000 VA, $\cos \varphi = 0.5$ 400 W LED |
| Type of contact (k): | 1x μ -contact, NO contact |
| Follow-up time: | 4 sec - 20 min |
| Switch-on threshold: | 2 - 500 Lux |

Product information

Motion detector with 140° detection area and 180° creep protection

Adjustable ball head


Detection area can be restricted with blinds

Zero crossing switching

Simple mounting thanks to plug base

Cable entry possible from above, from below and from behind

Can be mounted on standard flush-mount boxes

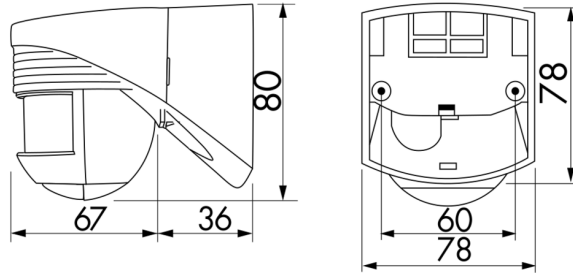

Accessories



RC-Arc extinction kit
Art.No: 10880

Voltage: 230 V AC ±10%
Dimensions: 38 x 12 x 26 mm
Degree / class of protection: IP20 / Class II



Mini-RC-Arc extinction kit
Art.No: 10882

Voltage: 230 V AC ±10%
Dimensions: 50 x 23 x 8 mm
Degree / class of protection: IP20 / Class II



Wire basket BSK (Ø 164 x 143 mm)


Art.No: 92467

Dimensions: Ø 164 x 143 mm
Impact strength: IK09
Housing: coated steel basket



Pole holder with weather protection
Art.No: 93220

Dimensions: 188 x 98 x 134 mm
Housing: stainless steel
Material color: stainless steel



Blinds LC-Click-N
Art.No: 32699

Housing: polycarbonate, UV-resistant
Material color: transparent



Wall holder with weather protection
Art.No: 93222

Dimensions: 188 x 98 x 134 mm
Material color: white



Wall holder with weather protection
Art.No: 93221

Dimensions: 188 x 98 x 134 mm
Material color: anthracite