

**B.E.G.****LUXOMAT®**

## LC-Click-N 140 UK 2.000 W

Prod.No. 93061 EAN: 4007529930616

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: 103 x 78 x 84 mm
- Power consumption: approx. 0.4 W

### Order data

Designation	Colour	Art.No
LC-Click-N 140 UK 2.000 W	black	93061

### Accessories

Designation	Colour	Art.No
RC-Arc extinction kit	white	10880
Mini-RC-Arc extinction kit		10882
Wire basket BSK (Ø 164 x 143 mm)	white	92467
Pole holder with weather protection	stainless steel	93220
Wall holder with weather protection	white	93222
Wall holder with weather protection	anthracite	93221
Blinds LC-Click-N		32699

## Technical data

Voltage:	110 - 240 V AC 50 / 60 Hz
Dimensions:	103 x 78 x 84 mm
Power consumption:	approx. 0.4 W
Detection area:	horizontal 140° (Wall mounting) max. 12 m across max. 4 m towards
Range:	max. 2 m anti- creep protection
Monitored area (tangential movement):	170 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 3 m / 2.5 m
Degree / class of protection:	IP54 / Class II
Impact strength:	IK04
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	black mat, similar to RAL9005

### Channel 1 (lighting control)

Switching power:	2000 W, $\cos \varphi$ = 1 1000 VA, $\cos \varphi$ = 0.5 400 W LED
Type of contact (k):	1x $\mu$ -contact, NO contact
Follow-up time:	4 sec - 20 min
Switch-on threshold:	2 - 500 Lux

## Product information

Motion detector with 140° detection area and 180° anti-creep zone

Adjustable ball head


Detection area can be restricted with blinds

Zero crossing switching

Simple mounting thanks to plug base

Cable entry possible from above, from below and from behind

Can be mounted on standard flush-mount boxes

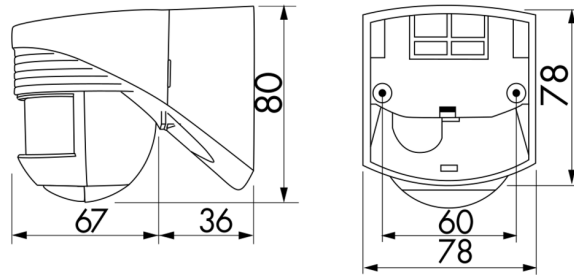

## Accessories



**RC-Arc extinction kit**  
Art.No: 10880

Voltage: 230 V AC ±10%  
Dimensions: 38 x 12 x 26 mm  
Degree / class of protection: IP20 / Class II



**Mini-RC-Arc extinction kit**  
Art.No: 10882

Voltage: 230 V AC ±10%  
Dimensions: 50 x 23 x 8 mm  
Degree / class of protection: IP20 / Class II




**Wire basket BSK (Ø 164 x 143 mm)**  
Art.No: 92467

Dimensions: Ø 164 x 143 mm  
Impact strength: IK09  
Housing: coated steel basket



**Pole holder with weather protection**  
Art.No: 93220

Dimensions: 188 x 98 x 134 mm  
Housing: stainless steel  
Material color: stainless steel



**Blinds LC-Click-N**  
Art.No: 32699

Housing: polycarbonate, UV-resistant  
Material color: transparent



**Wall holder with weather protection**  
Art.No: 93222

Dimensions: 188 x 98 x 134 mm  
Material color: white



**Wall holder with weather protection**  
Art.No: 93221

Dimensions: 188 x 98 x 134 mm  
Material color: anthracite