B.E.G. LUXOMAT® net




# LC-plus-DALI-SYS 280
# Set 93308-93221

DALI-SYS PIR Outdoor Multisensor with 280° detection and a range of up to 16 m (620 m²), for integration into DALI-SYS systems

## Order data

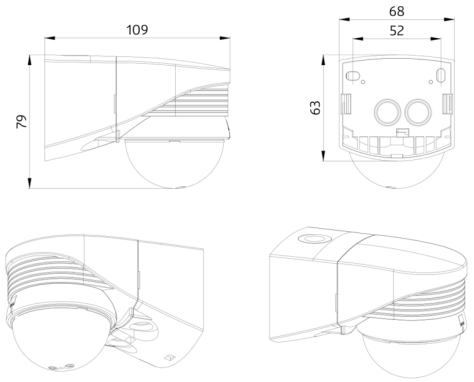
| Designation | Colour | Art.No |
|---|---|---|
| LC-plus-DALI-SYS 280 | white | 93308 |
| Wall holder with weather protection | anthracite | 93221 |

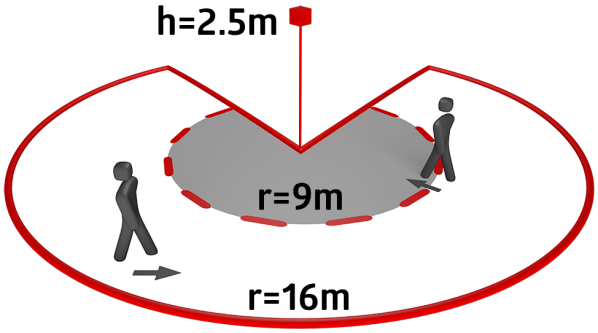
## Technical data

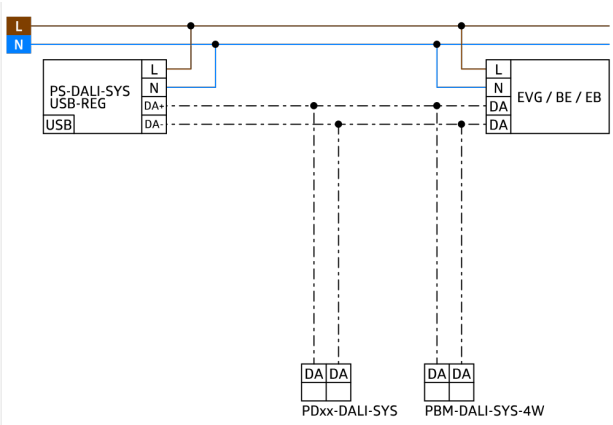
| | |
|---|---|
| Voltage: | via DALI Bus, max. 22.5 V DC |
| Dimensions: | 110 x 68 x 78 mm |
| Settings: | B.E.G. PC Tools, B.E.G. DALI-SYS router |
| Typ. power input: | 7 mA |
| Detection area: | horizontal 280° (Wall mounting) |
| Range: | max. 16 m across<br>max. 9 m towards |
| Monitored area (tangential movement): | 620 m² / 2.5 m mounting height |
| Mounting height min./max./recommended: | 2 m / 3 m / 2.5 m |
| Degree / class of protection: | IP54 / Class II |
| Impact strength: | IK02 |
| Ambient temperature: | -25 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | white mat, similar to RAL9010 |
| Follow-up time: | 1 sec – 120 min |
| Orientation light: | 5 – 100 % / 1 s – 120 min |
| Brightness set value: | 10 – 2500 Lux |

## Product information

Set : LC-plus-DALI-SYS 280 + Wall holder with weather protection anthracite


109
79
68
52
63


h=2.5m
r=9m
r=16m


L
N
PS-DALI-SYS
USB-REG
USB
DA+
DA-
EVG / BE / EB
DA
DA
PDxx-DALI-SYS
PBM-DALI-SYS-4W

## Set items

To receive the bundle according to the technical specification, please order the items listed.



**LC-plus-DALI-SYS 280**
Art.No: 93308

Voltage: via DALI Bus, max. 22.5 V DC
Dimensions: 110 x 68 x 78 mm
Settings: B.E.G. PC Tools, B.E.G. DALI-SYS router



**Wall holder with weather protection**
Art.No: 93221

Dimensions: 188 x 98 x 134 mm
Material color: anthracite