



## LC-plus-DALI-SYS 280 Set 93308-93222

DALI-SYS PIR Outdoor Multisensor with 280° detection and a range of up to 16 m (620 m<sup>2</sup>), for integration into DALI-SYS systems

### Order data


Designation	Colour	Art.No
LC-plus-DALI-SYS 280	white	93308
Wall holder with weather protection	white	93222

## Technical data

Voltage:	via DALI Bus, max. 22.5 V DC
Dimensions:	110 x 68 x 78 mm
Settings:	B.E.G. PC Tools, B.E.G. DALI-SYS router
Typ. power input:	7 mA
Detection area:	horizontal 280° (Wall mounting) max. 16 m across
Range:	max. 9 m towards
Monitored area (tangential movement):	620 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 3 m / 2.5 m
Degree / class of protection:	IP54 / Class II
Impact strength:	IK02
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010
Follow-up time:	1 sec - 120 min
Orientation light:	5 - 100 % / 1 s - 120 min
Brightness set value:	10 - 2500 Lux

## Product information

Set : LC-plus-DALI-SYS 280 + Wall holder with  
weather protection white

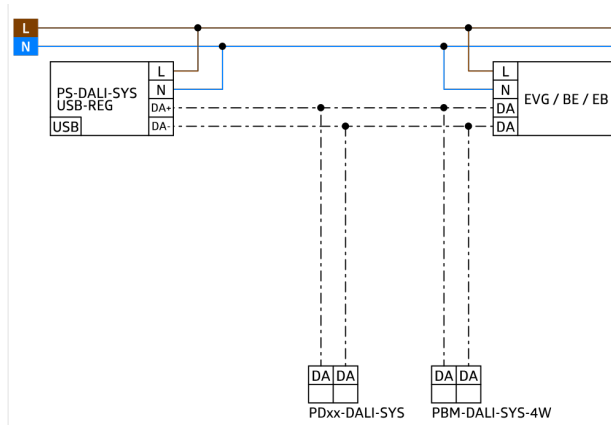

## Set items

To receive the bundle according to the technical specification, please order the items listed.



### **LC-plus-DALI-SYS 280**

Art.No: 93308

Voltage: via DALI Bus, max. 22.5 V DC

Dimensions: 110 x 68 x 78 mm

Settings: B.E.G. PC Tools, B.E.G. DALI-SYS router



### **Wall holder with weather protection**

Art.No: 93222

Dimensions: 188 x 98 x 134 mm

Material color: white