

B.E.G.**LUXOMAT®**

PD4-M-2C-DS-FC

Prod.No. 92760 EAN: 4007529927609

230V 2-channel PIR motion detector with 360° detection and a range of up to Ø24m (450 m²), remote-controllable, and 2 electrically isolated groups

Areas of application

- entrance halls
- corridors/hallways
- staircases
- toilets
- equipment rooms

Order data

| Designation | Colour | Art.No |
|----------------|--------|--------|
| PD4-M-2C-DS-FC | white | 92760 |

Accessories

| Designation | Colour | Art.No |
|---------------------------------|-------------|--------|
| IR-PD-1C | - | 92520 |
| IR-PD-1C-E | - | 92077 |
| IR-PD-Mini | - | 92159 |
| Wire basket BSK (Ø 200 x 90 mm) | white | 92199 |
| RC-Arc extinction kit | white | 10880 |
| Mini-RC-Arc extinction kit | | 10882 |
| BLE-IR-Adapter | black | 93067 |
| Blinds PD4 | transparent | 92313 |

Technical data

| | |
|---|--|
| Voltage: | 110 – 240 V AC 50 / 60 Hz |
| Dimensions: | Ø 117 x 100 mm |
| Power consumption: | < 1.5 W |
| Detection area: | horizontal 360° (Ceiling mounting) max. Ø 24 m across max. Ø 9 m towards max. Ø 8 m seated |
| Range: | |
| Monitored area (tangential movement): | 450 m ² / 2.5 m mounting height |
| Mounting height min./max./recommended: | 2 m / 10 m / 2.5 m |
| Degree / class of protection: | IP20 / Class II |
| Impact strength: | IK04 |
| Ambient temperature: | -25 °C to +50 °C |
| Housing: | polycarbonate, UV-resistant |
| Material color: | white mat, similar to RAL9010 |
| Connections and wires: | 0.5 ... 2.5 mm ² rigid 0.5 ... 2.5 mm ² fine-wired |

Channel 1 and Channel 2 (lighting control)

| | |
|----------------------|--|
| Switching power: | 2300 W, cos φ = 1 1150 VA, cos φ = 0.5 800 W LED max. inrush current I_p (20 ms) = 165 A max. inrush current I_p (200 μ s) = 800 A |
| Type of contact (k): | 2x μ -contact, NO contact with tungsten pre- make contact |
| Follow-up time: | 15 sec – 60 min, Pulse |
| Switch-on threshold: | 10 – 2000 Lux |
| Light measuring: | Mixed light measuring |

Product information

Occupancy detector connectable to two different phases

2 channels for switching light: the illumination system can be divided into two separate groups being electrically isolated.

Version as master device

Extension of the detection area with one additional PD4-M-2C-DS configured as a Slave device




Manual switching possible via a shared pushbutton

Additional functions can be set up using the optional remote control.


Factory settings 10 min and 500 lux

Application examples:

entrance halls, corridors/hallways, staircases, toilets, equipment rooms

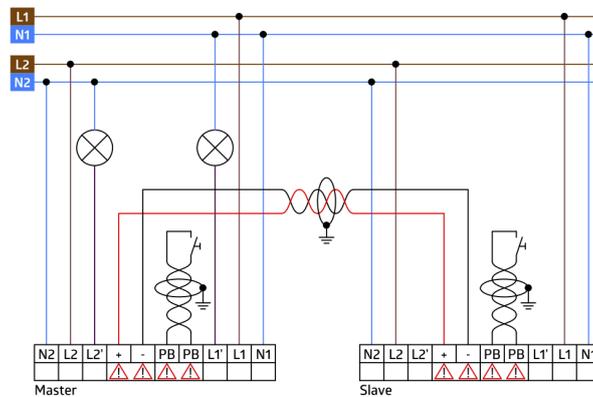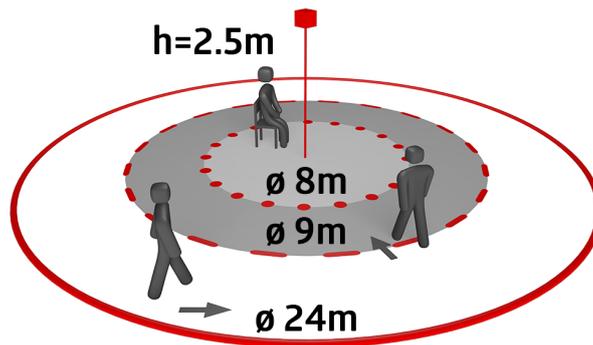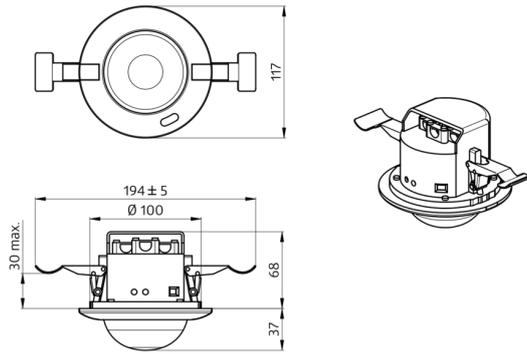

Accessories

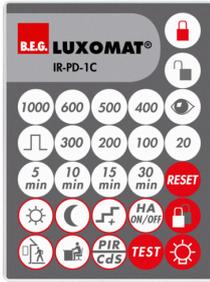

IR-PD-1C

Art.No: 92520

Battery: 3.0 V Lithium CR2032 (inclusive)
Dimensions: 80 x 60 x 8 mm
Material color: -



Wire basket BSK (Ø 200 x 90 mm)

Art.No: 92199

Dimensions: Ø 200 x 90 mm
Impact strength: IK09
Housing: coated steel basket



BLE-IR-Adapter

Art.No: 93067

Dimensions: 40 x 55 x 103 mm
Material color: black
Frequency: 2.4 GHz ISM band, GFSK
0.2 dBm + 5.3 dBi = 5.5 dBm



IR-PD-1C-E

Art.No: 92077

Battery: 3.0 V Lithium CR2032 (inclusive)
Dimensions: 80 x 60 x 8 mm
Material color: -



RC-Arc extinction kit

Art.No: 10880

Voltage: 230 V AC ±10%
Dimensions: 38 x 12 x 26 mm
Degree / class of protection: IP20 / Class II



Blinds PD4

Art.No: 92313

Housing: Housing UV- and shockresistant Polycarbonate
Material color: transparent



IR-PD-Mini

Art.No: 92159

Battery: 3.0 V Lithium CR2032 (inclusive)
Dimensions: 57 x 35 x 7 mm
Material color: -



Mini-RC-Arc extinction kit

Art.No: 10882

Voltage: 230 V AC ±10%
Dimensions: 50 x 23 x 8 mm
Degree / class of protection: IP20 / Class II