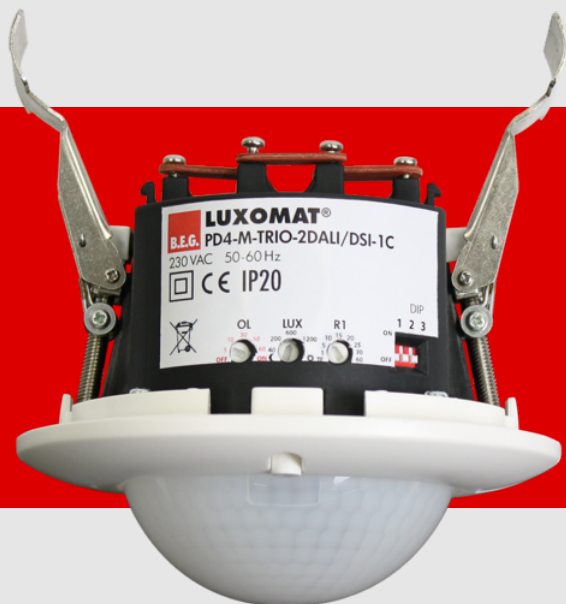


B.E.G.**LUXOMAT®**

PD4-M- TRIO-2DALI/DSI-1C-FC

Prod.No. 92756 EAN: 4007529927562

- Voltage: 110 – 240 V AC 50 / 60 Hz
- Dimensions: Ø 117 x 100 mm
- Power consumption: approx. 2 W

Areas of application

- open-plan offices
- conference rooms
- classrooms/seminar rooms

Order data

Designation	Colour	Art.No
PD4-M-TRIO-2DALI/DSI-1C-FC	white	92756

Accessories

Designation	Colour	Art.No
RC-Arc extinction kit	white	10880
Mini-RC-Arc extinction kit		10882
BLE-IR-Adapter	black	93067
IR-PD4-TRIO-DALI	-	92104
Wire basket BSK (Ø 200 x 90 mm)	white	92199
Wire basket BSK (Ø 164 x 143 mm)	white	92467

Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	Ø 117 x 100 mm
Power consumption:	approx. 2 W
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 24 m across max. Ø 8 m towards max. Ø 6.4 m seated
Range:	
Monitored area (tangential movement):	450 m ² / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 10 m / 2.5 m
Degree / class of protection:	IP20 / Class II
Impact strength:	IK04
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010

Channel 1 and Channel 2 (lighting control)

DALI output:	up to 25 DALI / DSI-EB per channel
Orientation light:	10 – 30 % / OFF / 1 min – 60 min / ∞

Channel 3 (HVAC control or lighting control, potential-free (dry))

Switching power:	3000 W, cos φ = 1 1500 VA, cos φ = 0.5 800 W LED max. inrush current I_p (20ms) = 165 A, (200 μ s) = 800 A
Type of contact:	1x μ -contact, dry NO contact with tungsten pre-make contact

Channel 1 to channel 3

Follow-up time:	1 min – 60 min
Brightness set value:	10 – 2000 Lux

Product information

Occupancy detector for two separate lighting groups, for
daylight-dependent lighting control

One potential-free switching channel for control of equipment
(HVAC) or lighting

Two independent, movable light sensors

One common detection area

2 DALI/DSI interfaces for control of digital dimmable electronic
ballasts as a group

Switching between DALI and DSI possible with remote control

Orientation light function

Relay with tungsten pre-make contact, optimised for LED
loads

Version as master device

Detection area can be extended by using slave devices

Manual switching and dimming via push button possible

Semi-automatic, full-automatic or twilight switch mode




Additional functions can be set up using the optional remote
control.

Application examples:

open-plan offices, conference rooms, classrooms/seminar
rooms

Light measuring:

Mixed light measuring



Accessories




RC-Arc extinction kit

Art.No: 10880

Voltage: 230 V AC $\pm 10\%$

Dimensions: 38 x 12 x 26 mm

Degree / class of protection: IP20 /
Class II



IR-PD4-TRIO-DALI

Art.No: 92104

Battery: 3.0 V Lithium CR2032 (inclusive)

Dimensions: 80 x 60 x 8 mm

Material color: -




Mini-RC-Arc extinction kit

Art.No: 10882

Voltage: 230 V AC $\pm 10\%$

Dimensions: 50 x 23 x 8 mm

Degree / class of protection: IP20 /
Class II



Wire basket BSK (Ø 200 x 90 mm)

Art.No: 92199

Dimensions: Ø 200 x 90 mm

Impact strength: IK09

Housing: coated steel basket



BLE-IR-Adapter

Art.No: 93067

Dimensions: 40 x 55 x 103 mm

Material color: black

Frequency: 2.4 GHz ISM band, GFSK
 $0,2 \text{ dBm} + 5,3 \text{ dBj} = 5,5 \text{ dBm}$



Wire basket BSK (Ø 164 x 143 mm)

Art.No: 92467

Dimensions: Ø 164 x 143 mm

Impact strength: IK09

Housing: coated steel basket