

**B.E.G.****LUXOMAT®**

## PD4-S-C-FM

Prod.No. 92445 EAN: 4007529924455

Slave PIR motion detector with 360° coverage and a detection area of up to 40 x 5 m (250 m<sup>2</sup>), for hallways

### Order data

Designation	Colour	Art.No
PD4-S-C-FM	white	92445

### Accessories

Designation	Colour	Art.No
Wire basket BSK (Ø 200 x 90 mm)	white	92199
Blinds PD4	transparent	92313

## Technical data

Voltage:	110 - 240 V AC 50 / 60 Hz
Dimensions:	Ø 97 x 84 mm
Power consumption:	approx. 0.2 W
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 40 m across
Range:	max. Ø 20 m towards
Monitored area (tangential movement):	250 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2.4 m / 2.6 m / 2.5 m
Degree / class of protection:	IP20 / Class II
Impact strength:	IK04
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010
Pulse interval:	2 or 9 sec

## Product information

Slave device detector designed for corridors

For extending the detection area of a Master device


Trigger pulse to master device upon detected movement  
independent of the ambient light level

Compatible with 230 V devices. Concerning exceptions please  
see the respective master device.


There are markings to ensure correct alignment during  
installation

### Application examples:

corridors/hallways, staircases

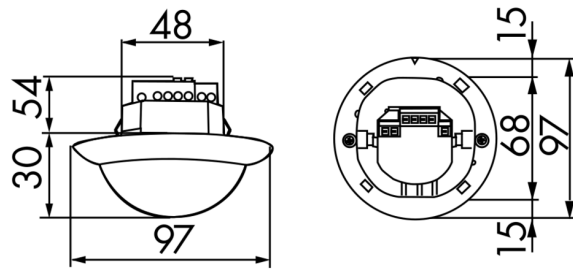

## Accessories



**Wire basket BSK (Ø 200 x 90 mm)**  
Art.No: 92199

Dimensions: Ø 200 x 90 mm  
Impact strength: IK09  
Housing: coated steel basket



**Blinds PD4**  
Art.No: 92313

Housing: Housing UV- and shockresistant Polycarbonate  
Material color: transparent