B.E.G. LUXOMAT® net




# PD4N-CAS Set
# 93474-93743-92199

CASAMBI-compatible PIR motion sensor with 360° detection and a range of up to Ø24m (450 m²)

## Order data

| Designation | Colour | Art.No |
|---|---|---|
| PD4N-CAS | white | 93474 |
| Corridor lens PD4N type A, Cover ring | black | 93743 |
| Wire basket BSK (Ø 200 x 90 mm) | white | 92199 |

## Technical data

| | |
|---|---|
| Voltage: | 230 V AC ±10% 50 Hz |
| Dimensions: | **Ø 200 x 90 mm (92199)** |
| Settings: | Casambi App |
| Power consumption: | 0.5 W |
| Detection area: | **horizontal 360° (Ceiling mounting) (93743)** |
| Range: | **max. Ø 40 m across max. Ø 20 m towards (93743)** |
| Monitored area (tangential movement): | **250 m² / 2.5 m mounting height (93743)** |
| Mounting height min./max./recommended: | **2.4 m / 2.6 m / 2.5 m (93743)** |
| Degree / class of protection: | IP20 / Class II |
| Impact strength: | **IK09 (92199)** |
| Ambient temperature: | -5 °C to +45 °C |
| Housing: | **polycarbonate, UV-resistant + coated steel basket (92199)** |
| Material color: | **black mat, similar to RAL9005 (93743)** |
| Number of PIR sensors: | 4 |
| **Channel 1 (lighting control)** | |
| Follow-up time: | 1 sec – 60 min |
| Brightness set value: | 1 – 4000 Lux |
| Light measuring: | Mixed light measuring |

## Product information

Set : PD4N-CAS + Corridor lens PD4N type A, Cover ring black mat, similar to RAL9005 + Wire basket BSK (Ø 200 x 90 mm) white

Casambi-enabled occupancy detector

Bright LED indication for commissioning

Mixed light measurement with internal and external light sensor

Weighting between internal and external light sensor can be adapted to suit the application

Adjustment of the reflection factor and input of the luminosity for the display of the actual luminosity in the app

Extension of the detection area with additional B.E.G. Casambi devices possible

Individual adaption of detection sensitivity for each PIR sensor

Detection area can be restricted with blinds


Functions adjustable via Casambi app


Including pre-assembled spring clamp with strain relief and contact protection cap for recessed ceiling mounting

Accessory for surface mounting available


Accessories for wall mounting optionally available

Further accessories for colour matching optionally available

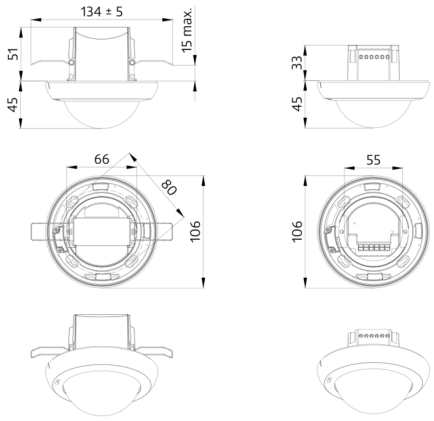

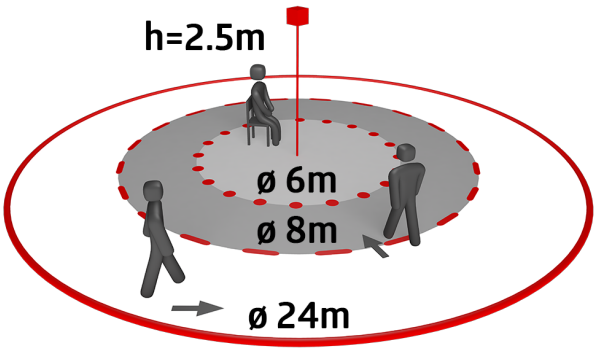
CASAMBI


L
N
N
L
L
N
Casambi
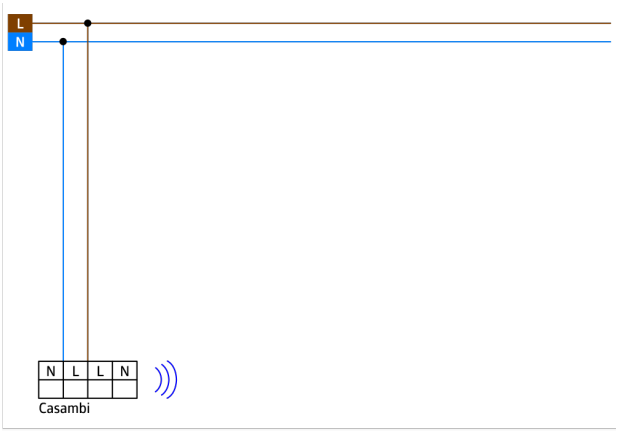
## Set items

To receive the bundle according to the technical specification, please order the items listed.




**PD4N-CAS**
Art.No: 93474

Voltage: 230 V AC ±10% 50 Hz
Dimensions: Ø 106 x 95 mm
Settings: Casambi App



**Corridor lens PD4N type A, Cover ring**
Art.No: 93743

Detection area: horizontal 360° (Ceiling mounting)
Range: max. Ø 40 m across
max. Ø 20 m towards
Monitored area (tangential movement): 250 m² / 2.5 m mounting height



**Wire basket BSK (Ø 200 x 90 mm)**
Art.No: 92199

Dimensions: Ø 200 x 90 mm
Impact strength: IK09
Housing: coated steel basket