

**B.E.G.****LUXOMAT®**

## PD9-M-DIM-FC

Prod.No. 92910 EAN: 4007529929108

- Voltage: 110 - 240 V AC 50 / 60 Hz
- Dimensions: Sensor head: Ø 45 x 28 mm,  
Power supply: 165 x 24 x 24 mm
- Power consumption: approx. 0.5 W

### Order data

Designation	Colour	Art.No
PD9-M-DIM-FC		92910

### Accessories

Designation	Colour	Art.No
BLE-IR-Adapter	black	93067
IR-PDim	-	92200
IR-PD-DIM-Mini	-	92098
RC-Arc extinction kit	white	10880
Mini-RC-Arc extinction kit		10882
Cover IP65 for Sensor head PD9	transparent	92958
Cover ring PD9 Ø 36 mm	anthracite	92235
Cover ring PD9 Ø 36 mm	white	92238
Cover ring PD9 Ø 36 mm	silver	92237
Cover ring PD9 Ø 45 mm	white	92327
Cover ring PD9 Ø 45 mm	silver	92346
Square design frame PD9-FC	pure white	92993

## Technical data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	Sensor head: Ø 45 x 28 mm, Power supply: 165 x 24 x 24 mm
Power consumption:	approx. 0.5 W
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 10 m across max. Ø 6 m towards max. Ø 4 m seated
Range:	
Monitored area (tangential movement):	78 m <sup>2</sup> / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 5 m / 2.5 m
Degree / class of protection:	IP20 / Class II
Impact strength:	IK03
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010
Cable length:	45 cm, screened

### Channel 1 (lighting control)

Switching power:	2300 W, $\cos \varphi$ = 1 1150 VA, $\cos \varphi$ = 0.5 300 W LED max. inrush current $I_p$ (20 ms) = 165 A max. inrush current $I_p$ (200 $\mu$ s) = 800 A
Type of contact (k):	1x $\mu$ -contact, NO contact with tungsten pre- make contact
DIM output:	1-10 V DC, up to 50 ballasts
Follow-up time:	1 min – 30 min
Brightness set value:	10 – 2000 Lux
Light measuring:	Mixed light measuring

## Product information

Mini occupancy detector for daylight-dependent lighting control
1 – 10 V interface for controlling analog, dimmable ballasts
Additional switching channel for the following function: Cut-Off (complete ECG switch-off to avoid standby losses).
Manual switching and dimming via push button possible
Orientation light function
Version as master device
Detection area can be extended by using slave devices

### Easy operation with remote control (required)

Relay with tungsten pre-make contact, optimised for LED loads
Power supply passes through the hole in the ceiling for the detector (34 mm Ø)
Avoidance of standby losses of the lighting system in accordance with EnEV DIN V 18599-4
Spring clips for quick and easy installation in suspended ceilings and light fittings
Includes 45 mm cover ring and blinds

### Application examples:



plumbed rooms/bathrooms, corridors/hallways, small offices



power supply



sensor head

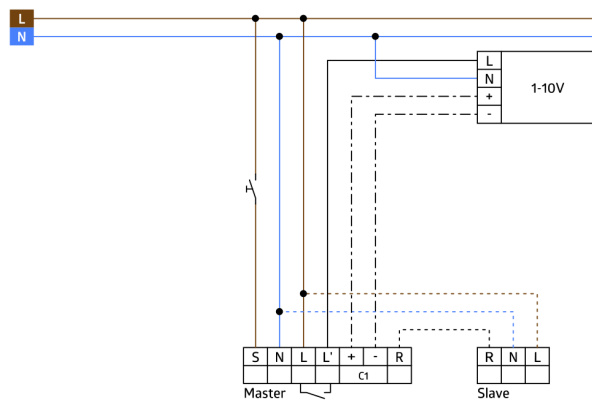

## Accessories



**BLE-IR-Adapter**  
Art.No: 93067

Dimensions: 40 x 55 x 103 mm  
Material color: black  
Frequency: 2.4 GHz ISM band, GFSK  
0.2 dBm + 5.3 dBi = 5.5 dBm



**IR-PDim**  
Art.No: 92200

Battery: 3.0 V Lithium CR2032 (inclusive)  
Dimensions: 80 x 60 x 8 mm  
Material color: -



**IR-PD-DIM-Mini**  
Art.No: 92098

Battery: 3.0 V Lithium CR2032 (inclusive)  
Dimensions: 57 x 35 x 7 mm  
Material color: -



**RC-Arc extinction kit**  
Art.No: 10880

Voltage: 230 V AC  $\pm 10\%$   
Dimensions: 38 x 12 x 26 mm  
Degree / class of protection: IP20 / Class II



**Mini-RC-Arc extinction kit**  
Art.No: 10882

Voltage: 230 V AC  $\pm 10\%$   
Dimensions: 50 x 23 x 8 mm  
Degree / class of protection: IP20 / Class II



**Cover IP65 for Sensor head PD9**  
Art.No: 92958

Degree / class of protection: IP65  
Housing: UV-resistant  
Material color: transparent



**Cover ring PD9 Ø 36 mm**  
Art.No: 92235

Dimensions: Ø 36 mm  
Housing: polycarbonate, UV-resistant  
Material color: anthracite glossy



**Cover ring PD9 Ø 36 mm**  
Art.No: 92238

Dimensions: Ø 36 mm  
Housing: polycarbonate, UV-resistant  
Material color: white glossy




**Cover ring PD9 Ø 36 mm**  
Art.No: 92237

Dimensions: Ø 36 mm  
Housing: polycarbonate, UV-resistant  
Material color: silver glossy




**Cover ring PD9 Ø 45 mm**  
Art.No: 92327

Dimensions: Ø 45 mm  
Material color: white mat



**Cover ring PD9 Ø 45 mm**  
Art.No: 92346

Dimensions: Ø 45 mm  
Material color: silver mat



**Square design frame PD9-FC**  
Art.No: 92993

Dimensions: 45 x 45 x 2.6 mm  
Housing: polycarbonate, UV-resistant  
Material color: pure white mat, similar  
to RAL9010