

**B.E.G.****SAFETYLUX®**

## BD21/6/3DALI-LED

Prod.No. 93022 EAN: 4007529930227

- Voltage: 230 V AC +/- 10%% 50 Hz
- Dimensions: 250 x 150 x 135 mm
- Visibility range: 21

### Order data

Designation	Colour	Art.No
BD21/6/3DALI-LED	white	93022

### Accessories

Designation	Colour	Art.No
IR-Adapter for Smartphones	black	92726
BLE-IR-Adapter	black	93067

## Technical data

Voltage:	230 V AC +/- 10% 50 Hz
Dimensions:	250 x 150 x 135 mm
Visibility range:	21
Operation mode:	Permanent operation, Wake up mode
Luminous flux / intensity:	LED circuit board 12 x 0.5 W Colour temperature: 6500 K daylight white
Degree / class of protection:	IP54 / Class II
Ambient temperature:	0 °C to +35 °C
Housing:	Polycarbonate
Material color:	white

### Single-battery luminaire

Accu:	NiMH 3.6 V 4000 mAh
Nominal operation duration:	3 h

### Monitoring

Local surveillance:	automatic self-test
Central monitoring:	Dali-Bus B.E.G.-DALI- SYS (optionally)

## Product information

LED emergency light with single battery

Sturdy plastic case IP54

Bright and even illumination


Environmentally friendly NiMH battery with deep discharge protection

Bidirectionally remote control-capable with the IR adapter and the B.E.G. smartphone app

Automatic self-test with a two-colour status LED

**Optional:** Central monitoring option with B.E.G.-DALI-SYS via a DALI bus

Incl. LED illuminant, battery and four pictograms

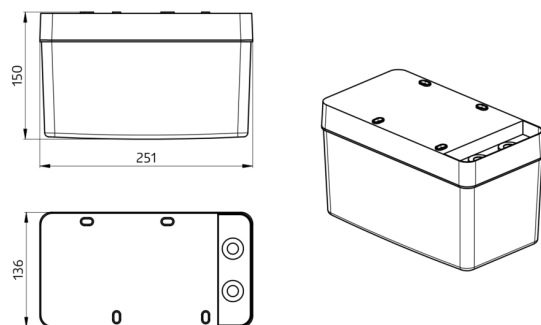

## Accessories



### IR-Adapter for Smartphones

Art.No: 92726

Dimensions: 47 x 19 x 10 mm

Degree / class of protection: IP20

Ambient temperature: -20 °C to +40 °C



### BLE-IR-Adapter

Art.No: 93067

Dimensions: 40 x 55 x 103 mm

Material color: black

Frequency: 2.4 GHz ISM band, GFSK 0.2 dBm + 5.3 dBi = 5.5 dBm