

**B.E.G.****LUXOMAT®**

## CdS-T-SM

Prod.No. 92367 EAN: 4007529923670

- Voltage: 110 – 240 V AC 50 / 60 Hz
- Dimensions: 69 x 63 x 55 mm
- Power consumption: < 0.5 W

### Order data

Designation	Colour	Art.No
CdS-T-SM	white	92367

### Accessories

Designation	Colour	Art.No
BLE-IR-Adapter	black	93067
IR-CdS-T	-	92368

## Technical data

Voltage:	110 - 240 V AC 50 / 60 Hz
Dimensions:	69 x 63 x 55 mm
Power consumption:	< 0.5 W
Degree / class of protection:	IP54 / Class II
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
Material color:	white mat, similar to RAL9010

### Channel 1 (lighting control)

Switching power:	2300 W, $\cos \varphi = 1$ 1150 VA, $\cos \varphi = 0.5$ max. inrush current $I_p$ (20 ms) = 165 A max. inrush current $I_p$ (200 $\mu$ s) = 800 A
Type of contact (k):	1x NO contact with tungsten pre-make contact
Switch-on threshold:	2 - 300 Lux

## Product information

Remote control-capable photo electric switch with integrated timer



Energy-saving period may be programmed with the integrated timer by the touch of a button

Inputting the current light value by the touch of a button

Infrared remote control included

Relay with tungsten pre-make contact, optimised for LED loads

**Application examples:** ideal for entrance areas, staircases, halls where permanent light is required

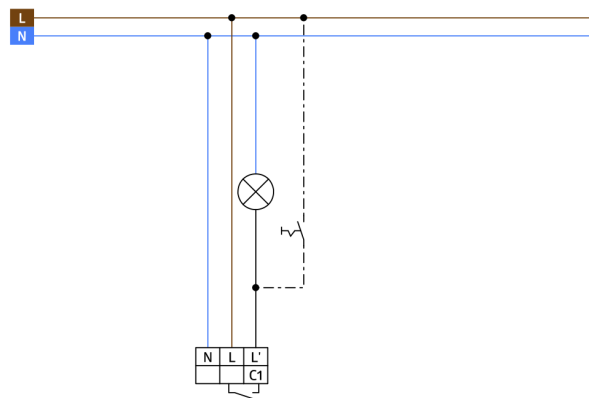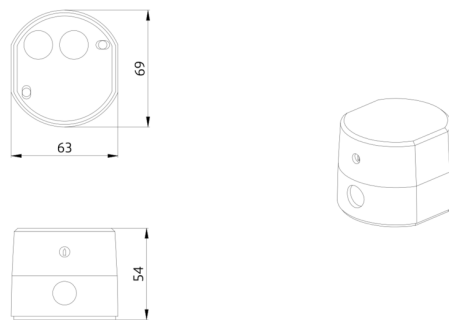

## Accessories



### BLE-IR-Adapter

Art.No: 93067

Dimensions: 40 x 55 x 103 mm

Material color: black

Frequency: 2.4 GHz ISM band, GFSK 0.2 dBm + 5.3 dBi = 5.5 dBm



### IR-CdS-T

Art.No: 92368

Battery: 3.0 V Lithium CR2032 (inclusive)

Dimensions: 80 x 60 x 8 mm

Material color: -