

Indoor 180-KNX-BA covering not included

Prod.No. 93362 EAN: 4007529933624

- Voltage: via KNX BUS
- Dimensions: (covering not included) 70 x 70 x 61 mm
- Typ. power input: 12 mA

Order data

Designation	Colour	Art.No
Indoor 180-KNX-BA covering not included	-	93362

Accessories

Designation	Colour	Art.No
Frame IP20 Indoor 180	pure white	92630
Frame IP20 Indoor 180	traffic white	92631
Frame IP20 Indoor 180	anthracite	92634
Frame IP54 Indoor 180	pure white	92139
Frame IP20 Indoor 180	oyster white	92632
Frame IP20 Indoor 180	silver	92633
Surface mounting socket Indoor 180	pure white	92141
Central plate Indoor 180 45x45	traffic white	38947
Central plate Indoor 180 45x45	oyster white	39076
Central plate Indoor 180 55 x 55 mm	pure white	39222

Technical data

Voltage:	via KNX BUS (covering not included) 70 x 70 x 61 mm
Dimensions:	
Typ. power input:	12 mA
Detection area:	horizontal 180° (Wall mounting) max. 10 m across max. 3 m towards
Range:	
Monitored area (tangential movement):	150 m ² / 1.1 m mounting height
Mounting height min./max./recommended:	1 m / 2.2 m / 1.1 m
Degree / class of protection:	IP20 / Class III
Impact strength:	IK05
Ambient temperature:	-25 °C to +55 °C
Housing:	polycarbonate, UV-resistant
Number of light sensors:	1
Material color:	-
Number of PIR sensors:	1
KNX TP 256:	Yes
Switch-on threshold:	5 – 2000 Lux

Product information

KNX occupancy detector with integrated KNX bus coupler, especially for installation in walls

Full automatic mode

1 x light (for switching), 1 separate HVAC bloc

Individual adaption of the PIR sensor sensitivity

Measuring of mixed light thanks to internal light sensor

Various locking functions

Status LEDs can be activated / deactivated

Behaviour upon bus voltage return definable at choice

Variable safety pause after switching off the lights

Settings ex ETS 4 for integration in KNX systems

The product database for import into the ETS database can be downloaded from the B.E.G. homepage.

For use with covering (interior cover dimensions 50 x 50 mm) in 5 different colours




In combination with centre plates usable with current frame systems of various manufacturers

B.E.G. frames and centre plates for combination with other frame systems available

Please order cover frame separately, available in various colours

Application examples:

toilets, equipment rooms

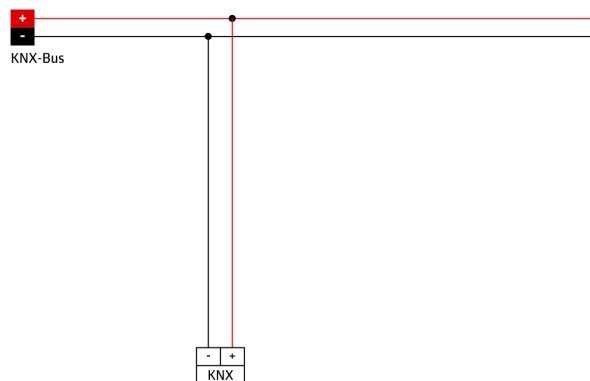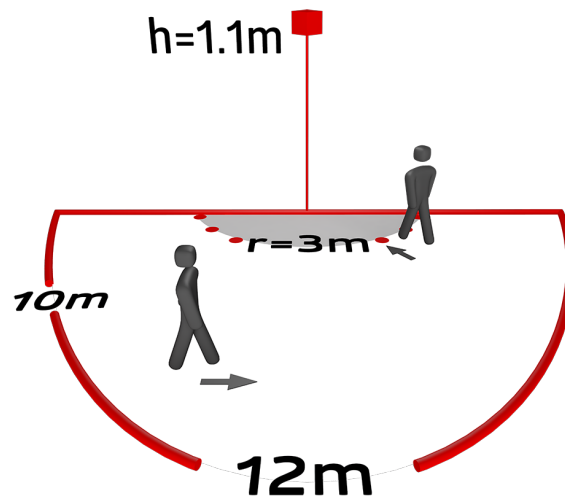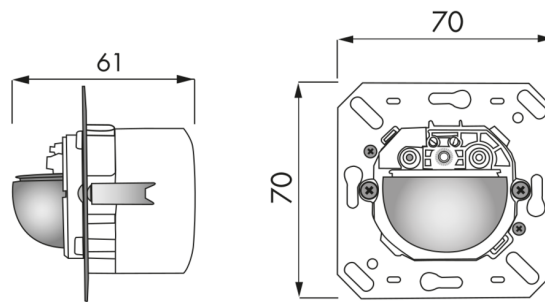

Accessories



Frame IP20 Indoor 180

Art.No: 92630

Dimensions: 92630= 86 x 86 mm
Degree / class of protection: 92630= IP20
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180

Art.No: 92631

Dimensions: 92631= 86 x 86 mm
Degree / class of protection: 92631= IP20
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180

Art.No: 92634

Dimensions: 92634= 86 x 86 mm
Degree / class of protection: 92634= IP20
Housing: polycarbonate, UV-resistant



Frame IP54 Indoor 180

Art.No: 92139

Dimensions: 92139= 87 x 87 mm
Degree / class of protection: 92139= IP54
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180

Art.No: 92632

Dimensions: 92632= 86 x 86 mm
Degree / class of protection: 92632= IP20
Housing: polycarbonate, UV-resistant



Frame IP20 Indoor 180

Art.No: 92633

Dimensions: 92633= 86 x 86 mm
Degree / class of protection: 92633= IP20
Housing: polycarbonate, UV-resistant



Surface mounting socket Indoor 180

Art.No: 92141

Dimensions: 88 x 88 x 42 mm
Degree / class of protection: IP54
Impact strength: IK05



Central plate Indoor 180 45x45

Art.No: 38947

Dimensions: 45 x 45 mm
Material color: traffic white mat, similar to RAL9016



Central plate Indoor 180 45x45

Art.No: 39076

Dimensions: 45 x 45 mm
Housing: polycarbonate, UV-resistant
Material color: oyster white mat, similar to RAL1013



Central plate Indoor 180 55 x 55 mm

Art.No: 39222

Dimensions: 55 x 55 mm

Housing: polycarbonate, UV-resistant

Material color: pure white glossy