



L8

Prod.No. 94446 EAN: 4007529944460

- Voltage: 230 V AC $\pm 10\%$ 50 / 60 Hz
- Dimensions: \varnothing 300 x 110 mm
- Lamp: max. 23 W with bulb socket E 27

Order data

Designation
L8

Colour
white

Art.No
94446

Technical data

Voltage:	230 V AC $\pm 10\%$ 50 / 60 Hz
Dimensions:	Ø 300 x 110 mm
Lamp:	max. 23 W with bulb socket E 27
Photobiological safety:	RG 0
Degree / class of protection:	IP40 / Class I
Impact strength:	94446=IK02, 94451=IK06
Ambient temperature:	-15 °C to +30 °C
Housing:	L8: acrylic glass L7: Polycarbonate
Material color:	white

Product information

Round wall and ceiling light

Acrylic glass is suitable for all standard applications


Polycarbonate is appropriate for areas where greater impact resistance is required (e.g. schools, public buildings)

Ideally supplements the HF-L7 and HF-L8

Supply without lamp

Application examples:

corridors, halls, staircases, storage rooms, cellars, toilets

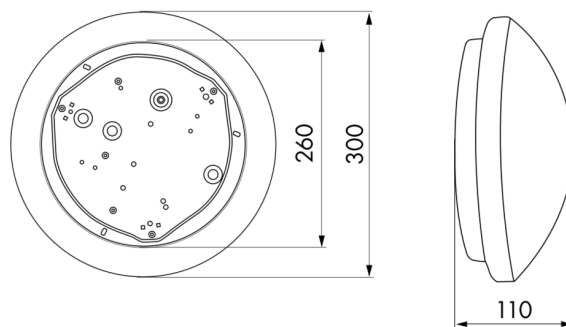

h (m)	Ø (m)	E (lx)
1.0	3.7	27
2.0	7.4	7
3.0	11.0	3
4.0	14.7	2
5.0	18.4	1

