

**B.E.G.****LUXOMAT®**

## PD4-M-HCL2-SM DALI-2

Prod.No. 93485 EAN: 4007529934850

- Voltage: 230 V AC  $\pm 10\%$  50 Hz
- Dimensions:  $\varnothing$  124 x 85 mm
- Power consumption: approx. 2 W

### Order data

| Designation          | Colour | Art.No |
|----------------------|--------|--------|
| PD4-M-HCL2-SM DALI-2 | white  | 93485  |

### Accessories

| Designation                                   | Colour      | Art.No |
|---|-------------|--------|
| BLE-IR-Adapter                                | black       | 93067  |
| IR-HCL2-Mini                                  | -           | 93374  |
| PS-DALI-LINK-FC                               | white       | 92846  |
| Wire basket BSK ( $\varnothing$ 200 x 90 mm)  | white       | 92199  |
| Wire basket BSK ( $\varnothing$ 164 x 143 mm) | white       | 92467  |
| Socket IP54 PD4-TRIO-SM                       | white       | 92386  |
| Blinds PD4                                    | transparent | 92313  |
| Wall holder PD4-SM                            | white       | 92441  |
| Pendulum mounting set PD2/3/4 SM              | white       | 93179  |

## Technical data

|  |  |
|--|--|
| Voltage:                               | 230 V AC $\pm 10\%$<br>50 Hz                                   |
| Dimensions:                            | Ø 124 x 85 mm  |
| Power consumption:                     | approx. 2 W  |
| Detection area:                        | horizontal 360°<br>(Ceiling mounting)<br>max. Ø 24 m<br>across |
| Range:                                 | max. Ø 8 m<br>towards<br>max. Ø 6.4 m<br>seated                |
| Monitored area (tangential movement):  | 450 m <sup>2</sup> / 2.5 m<br>mounting<br>height               |
| Mounting height min./max./recommended: | 2 m / 10 m / 2.5 m   |
| Degree / class of protection:          | IP20 / Class II  |
| Impact strength:                       | IK04   |
| Ambient temperature:                   | -25 °C to +50 °C   |
| Housing:                               | polycarbonate,<br>UV-resistant                                 |
| Material color:                        | white, similar to<br>RAL9010                                   |

### DALI Control

|                            |   |
|----------------------------|---|
| DALI output:               | 100 mA<br>(guaranteed),<br>120 mA (max.)<br>DT5, DT6, DT7,<br>DT8-Tc (HCL |
| Supported control gear:    | only possible<br>with DT8-Tc,<br>2700 - 6500 K)<br>B.E.G. BMS             |
| Supported control devices: | (motion<br>detection)   |
| Follow-up time:            | 1 min - 150 min<br>5 - 100 % / OFF  |
| Orientation light:         | / 1 min - 255<br>min / ∞  |
| Brightness set value:      | 10 - 2500 Lux   |

### Relay (dry NO)

|                  |   |
|------------------|---|
| Switching power: | 2300 W, $\cos \varphi$<br>= 1<br>1150 VA, $\cos \varphi$<br>= 0.5<br>800 W LED<br>max. inrush<br>current $I_p$ (20<br>ms) = 165 A, $I_p$<br>(200 µs) = 800<br>A |
| Type of contact: | 1x µ-contact,<br>NO contact   |
| Follow-up time:  | 5 sec - 120 min<br>(HVAC)   |

## Product information

Bidirectional occupancy detector with integrated DALI application controller for an energy-efficient and biologically effective light control (Human Centric Lighting)

Integrated DALI power supply and 3 push-button inputs

Preset and freely adjustable HCL curves (12 anchor points per 24h)

Adjustable communication mode "Broadcast" (1 light zone, without addressing) or "Multicast" (several light zones, HVAC, with addressing)

Dim-2-Warm: brightness and colour temperature can be infinitely adjusted simultaneously with a long keystroke

Calling up lighting scenes using accessory

Mixed light measurement with internal and external light sensor

External light sensor can be swivelled by 45

Powerful switching relay for different operating modes, e.g. Cut-off function for DALI ballasts, HVAC, blackboard illumination.

Quick commissioning and maintenance processes via Smartphone/Tablet App (Android, iOS) - No PC-Tool required

Detection range can be extended with up to 8 B.E.G. BMS multisensors

Up to 64 DT8 driver luminaires (Colour Type Tc), doubling the DALI output current with accessory may be necessary

Complete range of functions can only be activated using the BLE-IR-Adapter and a compatible Smartphone or Tablet (Android, iOS).

The integrated real time clock regulates automatically the colour temperature and the brightness level in such a way that the human circadian rhythm is supported

An outdoor colour temperature light sensor, available as an accessory, can be used to measure / transmit the current daylight value

Lighting zone A for main lighting with segmented, daylight-dependent regulation in offset mode via 3 DALI groups

Lighting zone B for desk or accent lighting via separate DALI group or via integrated relay

Lighting zone B - Output type adjustable to switching output (factory setting) or regulation output (same as group 1)

Manual switching or dimming via conventional pushbuttons

Colour temperature can be adjusted separately and continuously via separate push-button input

Adjustable dynamics (minimum and maximum values) for brightness and colour temperature




Status LEDs can be activated / deactivated

PIN code

Orientation light function

Number of DALI participants can be determined quickly and reliably via the B.E.G. Online DALI Line Planner

Avoidance of standby losses of the lighting system in accordance with EnEV DIN V 18599-4

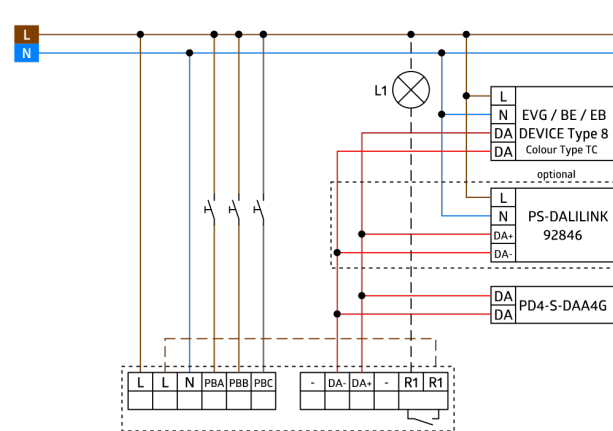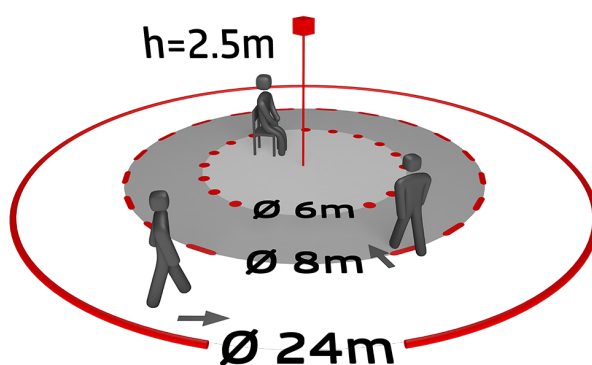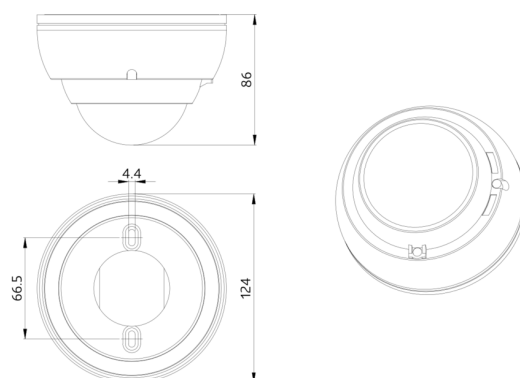


## Accessories



### BLE-IR-Adapter

Art.No: 93067

Dimensions: 40 x 55 x 103 mm  
Material color: black  
Frequency: 2.4 GHz ISM band, GFSK  
0.2 dBm + 5.3 dBi = 5.5 dBm



### Wire basket BSK (Ø 200 x 90 mm)

Art.No: 92199


Dimensions: Ø 200 x 90 mm  
Impact strength: IK09  
Housing: coated steel basket



### Blinds PD4

Art.No: 92313

Housing: Housing UV- and shockresistant Polycarbonate  
Material color: transparent



### IR-HCL2-Mini

Art.No: 93374

Battery: 3.0 V Lithium CR2032 (inclusive)  
Dimensions: 57 x 35 x 7 mm  
Material color: -



### Wire basket BSK (Ø 164 x 143 mm)

Art.No: 92467

Dimensions: Ø 164 x 143 mm  
Impact strength: IK09  
Housing: coated steel basket



### Wall holder PD4-SM

Art.No: 92441

Dimensions: 130 x 100 x 53 mm  
Housing: polycarbonate, UV-resistant  
Material color: white



### PS-DALI-LINK-FC

Art.No: 92846

Voltage: 110 - 277 V AC 50 / 60 Hz  
Dimensions: 240 x 26 x 26 mm  
Output voltage: 16 V DC (DALI, typical)



### Socket IP54 PD4-TRIO-SM

Art.No: 92386

Degree / class of protection: IP54  
Housing: polycarbonate, UV-resistant  
Material color: white



### Pendulum mounting set PD2/3/4 SM

Art.No: 93179

Dimensions: 1 : Ø 113 x 79 mm, 2 : Ø 113 x 34 mm  
Housing: polycarbonate, UV-resistant  
Material color: white, similar to RAL9010