



MORE POWER

PSN-230 / 1280 / 30 / KNX REG

The new KNX power supply – More power for KNX systems


The **more powerful power supply unit** is perfect for TP-256 systems and providing the necessary power for larger installations.

The advantages at a glance:

- **Twice the power:** Twice as much power with only 18 mm extra width.
- **Compact design:** The new power supply unit is 72 mm wide and perfectly designed for top-hat rail mounting in distribution boards. This KNX bus power supply conforms to standards and has an integrated choke.
- **Additional auxiliary voltage:** The model also supplies an unchoked auxiliary voltage of 30 VDC so that the systems are reliably supplied at all times.
- **Status monitoring:** Various LED indicators provide information about the status of the device at all times.


Increased performance and flexibility for KNX installations – the future of automation solutions.

KNX




PSN-230 / **1280** / 30 / KNX REG

PSN-230 / **640** / 30 / KNX REG

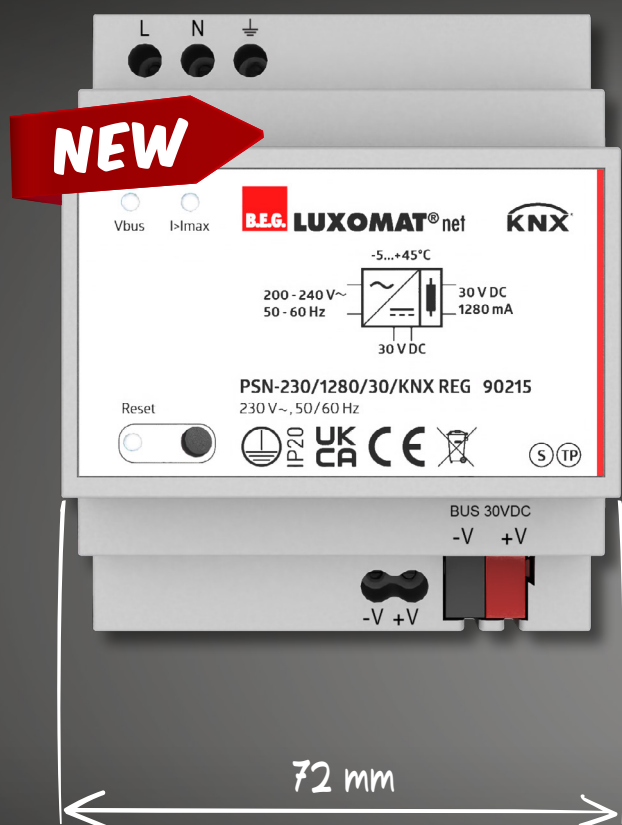


Nominal current:
1280 mA

Maximum nominal current:
2620 mA



90215

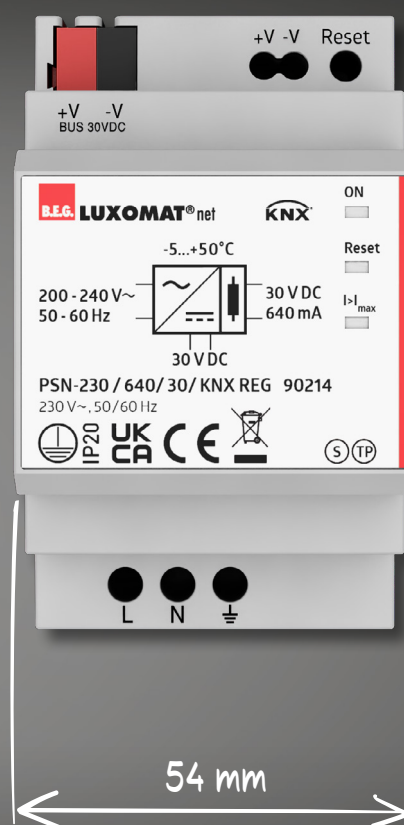

Nominal current:
640 mA

Maximum nominal current:
1300 mA



90214