





Feel comfortable in your building

SWITCHING ACTUATORS **KNX Secure**

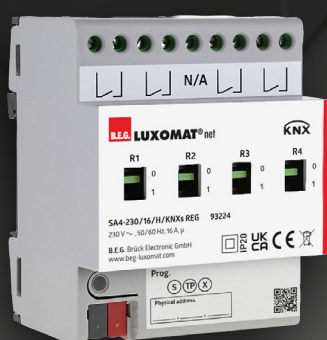


4 way switching actuator

SA4 - 230 / 16 / H / **KNXs** REG

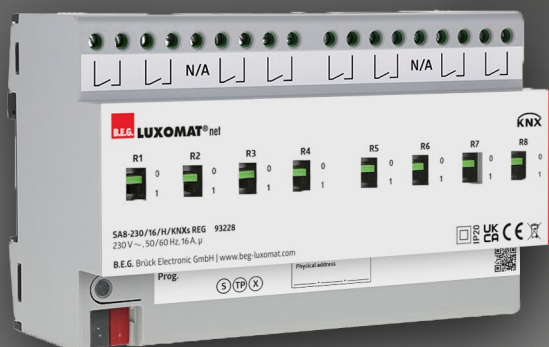

8 way switching actuator

SA8 - 230 / 16 / H / **KNXs** REG

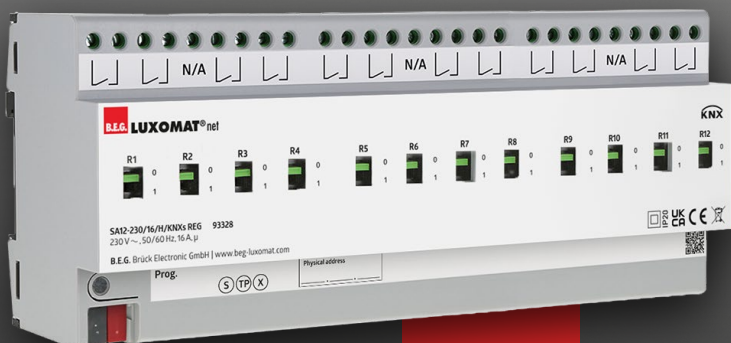

12 way switching actuator

SA12 - 230 / 16 / H / **KNXs** REG

NEW



beg-luxomat.com






Feel comfortable in your building



SA4-230/16/H/KNXs REG
4 switching outputs
Switching actuator



93224



SA8-230/16/H/KNXs REG
8 switching outputs
Switching actuator



93228



SA12-230/16/H/KNXs REG
12 switching outputs
Switching actuator



93328

New KNX Secure switching actuators



Our proven switching actuators become KNX Secure.

In addition to the 4 way and 8 way actuators, a 12 way actuator is also being launched. With these three types, we fulfil the demand for secure KNX switching actuators with high switching capacities. All switch actuators are equipped with a wide range of functions that are required in KNX systems.

- **KNX Secure capable**
- **Industrial quality**
- **Switch contacts optimised for capacitive loads (e.g. LED lights and power supply units)**
- **Manual switch for manual switching, even without bus voltage**
- **Supply voltage via KNX bus, no additional mains supply required**

Technical data:

Voltage:	via KNX BUS
Dimensions:	
93224	90 x 72 x 64 mm (4 TE)
93228	90 x 144 x 64 mm (8 TE)
93328	90 x 216 x 64 mm (12 TE)
Typ. power input:	5 mA typical / 20 mA max.
Power consumption:	0.15 W
Degree / class of protection:	IP20 / Class II
Ambient temperature:	-5°C to +45°C
KNX TP 256:	Yes
Connections and wires:	0.2 ... 4.0 mm ² rigid 0.25 ... 2.5 mm ² fine-wired (with or without ferrule)
	per channel
Switching power:	3680 W, cos ϕ = 1 max. inrush current I _p (150 μ s) = 600 A
Type of contact (k):	μ -contacts, dry NO contact
Outputs:	4/8/12 switching outputs