


An overview of the B.E.G. range



B.E.G. UK Ltd
Apex Court – Grove House
Campmill Road · West Byfleet,
Surrey KT14 6SQ
T +44 870 850 5412
info@beguk.co.uk
beg-luxomat.com

FOLLOW US:

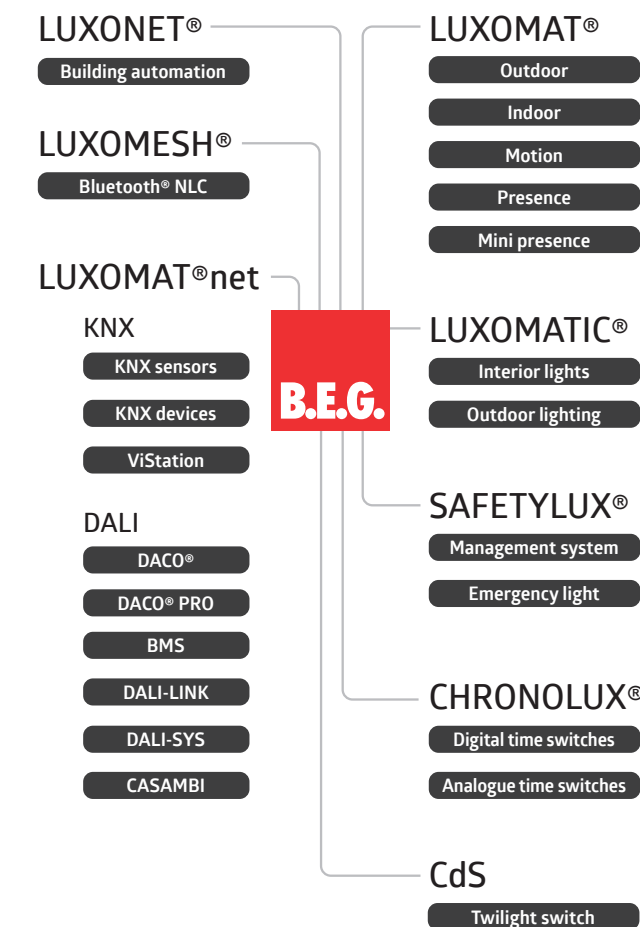

MARLIN Electrical Ltd
10 Vesey Place, Glenageary
Co. Dublin
T +353 1 280 72 05
M +353 87 260 62 97
connor@marlinent.ie


We reserve the right to make changes to the technical specifications and design, and to correct any errors.

Indoor180N

1C



- Tangential range $r = 14$ m, radial range $r = 3$ m, presence range $r = 5$ m
- Sensor technology: 3 x PIR
- Detection angle: 180°
- Acoustic sensor
- Easy installation
- Glossy & Matt: different finishes
- *Indoor180N is supplied without a frame. A suitable frame (55 x 55 mm) from your preferred switch manufacturer must be fitted.*
- Can be used as either a Master or a Slave



93260




IndoorHF

1C



- Tangential / radial range: $r = 4 \times 8$ m
- Sensor technology: 1 x HF 60 GHz
- Detection angle: 180°
- A sleek, modern and attractive design, in black and white
- Easy installation
- Glossy & Matt: different finishes
- *IndoorHF is supplied without a frame. A suitable frame (55 x 55 mm) from your preferred switch manufacturer must be fitted.*
- Can be used as either a Master or a Slave

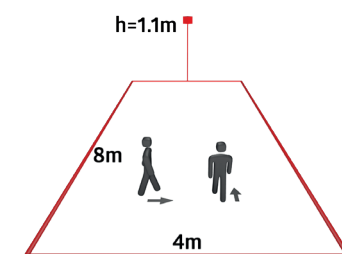

93261



Indoor 180

1C


2C

S

LV



- Maximum range: tangential $r = 10$ m, radial $r = 3$ m
- Sensor technology: 2 x PIR
- Detection angle: 180°
- Acoustic sensor
- Available as a motion detector or an presence detector

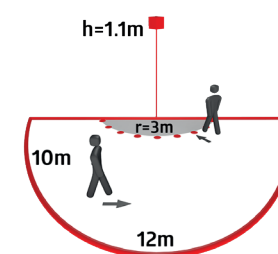

92665




Indoor 140-L

1C



- Tangential range $r = 8$ m, radial range $r = 3$ m, presence range $r = 2$ m
- Sensor technology: 1 x PIR
- Detection angle: 120°
- Integrated downlight with orientation light and night light functions
- Integrated Push-buttons
- Can be used as either a Master or a Slave

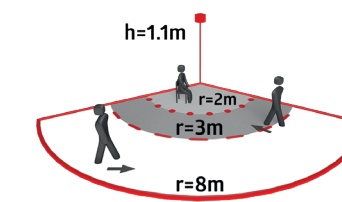

94325




Indoor Family



B.E.G.

Indoor Family – Overview

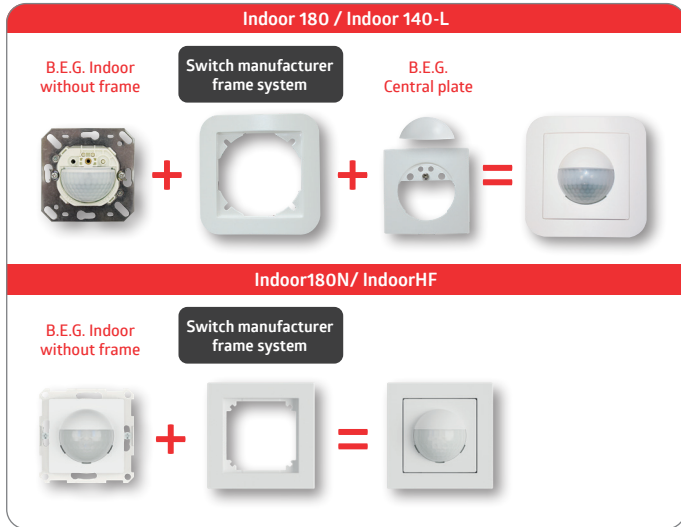

93260 Indoor180N-M-1C tw mt.
93262 Indoor180N-M-1C tw gl.

93261 IndoorHF-M-1C tw mt.
93263 IndoorHF-M-1C tw gl.

94325 Indoor 140 L without frame
94328 Indoor 140-L with frame

94341 Frame IP20 Indoor 140-L ac mt.
94342 Frame IP20 Indoor 140-L pw gl.
94343 Frame IP20 Indoor 140-L pw mt.
94344 Frame IP20 Indoor 140-L ow mt.

94345 Central plate Indoor 140 pw gl.
94346 Central plate Indoor 140 pw gl.
38946 Central plate Indoor 140 pw gl.
39075 Central plate Indoor 140 ow mt.

1C


1C

1C

Indoor 140-L
ACCESSORIES

*gl. = glossy | mt. = matt

[S] = Slave device | [1C] = 1 Channel | [2C] = 2 Channels | [LV] = Low Voltage
[Stairwell] = Stairwell | [BMS] = Building Management System | [KNX] = KNX



Indoor 180
ACCESSORIES

[S]

[1C]

[2C]

[LV]

[Stairwell]

[UK]

[BMS]

[KNX]

Indoor 180-S with frame 92135
Indoor 180-S without frame 92660

Indoor 180-R with frame 92623
Indoor 180-R without frame 92665

Indoor 180-M-2C with frame 92136
Indoor 180-M-2C without frame 92661

Indoor 180-R-11-48V-3A with frame 92621
Indoor 180-R-11-48V-3A without frame 92666
Indoor 180-R-11-48V-RR without frame 92667

Indoor 180-TR with frame 92650
Indoor 180-TR without frame 92668

Indoor 180-R UK with frame 92610
Indoor180N-R/2W-UK with frame 92716

Indoor 180-BMS DALI-2 without frame 93540

Indoor 180-KNXs-ST without frame 93524
Indoor 180-KNXs-DX without frame 93525

Frame



87 x 87 mm
Frame IP54 Indoor 180 pw mt. 92139
Frame IP20 Indoor 180 pw mt. 92630
Frame IP20 Indoor 180 tw mt. 92631
86 x 86 mm
Frame IP20 Indoor 180 ow mt. 92632
Frame IP20 Indoor 180 si mt. 92633
Frame IP20 Indoor 180 ac mt. 92634

Central plates

56 x 56 mm
Central plate Indoor 180 pw gl. 35126
Central plate Indoor 180 pw gl. 35127
55 x 55 mm
Central plate Indoor 180 pw gl. 39222
Central plate Indoor 180 tw gl. 39223
Central plate Indoor 180 sw gl. 39241
Central plate Indoor 180 oval tw gl. 39242
45 x 45 mm
Central plate Indoor 180 tw mt. 38947
Central plate Indoor 180 ow mt. 39076

Protective cap Indoor 180 92018
Surface mounting socket Indoor 180 pw 92141
Blind Set Indoor 180 92294

B.E.G. Frame Colours

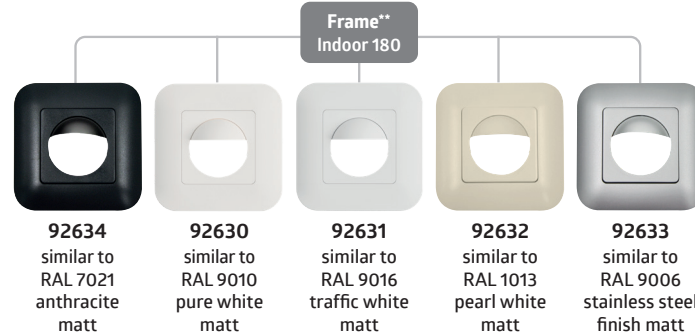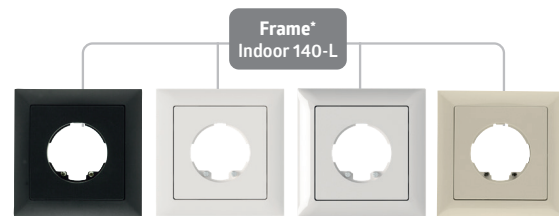

* including centre plate (63 x 63 mm)

** including centre plate (50 x 50 mm)

Abbreviations				
	Colour	similar		Surface
tw	traffic white	RAL9016	mt	matt
ac	anthracite	RAL7021	gl	glossy
pw	pure white	RAL9010		
ow	oyster white	RAL1013		
si	silver	RAL9006		
sw	signal white	RAL9003		

Compatibility Overview

	Indoor180N	IndoorHF	Indoor 180	Indoor 140 L
JUNG				
AS range				
AS 500	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
AS 500 surface-mounted				
A range				
A 550				
A FLOW				
A CREATION	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
A VIVA				
A CUBE				
LS range				
LS 990				
LS ZERO				
LS DESIGN	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
LS PLUS				
LS CUBE				
LS 1912	✗	✗	✗	✗
CD range				
CD 500				
CD surface-mounted	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
CD PLUS ***				

* LS range intermediate frame / ** CD range intermediate frame / *** + application frame CD Plus range

hager I Berker				
S1 / surface-mounted				
B.3 / surface-mounted				
B.7				
A.1	A.8			
C.1	C.8			
Q.1	Q.3	Q.7		
K.1	K.5			
R.1	R.3	R.8		
Series 1930	Glass	R.Classic		
TS				
Integro				
Surface-mounted housings IP20				
Connection system				
Wet-room installation				

GIRA				
Standard 55 / surface-mounted				
E1				
E2				
E3				
Event				
Esprit				
Studio / surface-mounted				
F100 / surface-mounted	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
TX_44	✓	✓	✓	✓

* Adapter frame 55 x 55 mm / ** Adapter frame 55 x 55 mm TX_44

Niko				
Pure				
Intense				
Original	✗	✗	38947 tw. mt. 39076 ow. mt.	38946 pw. gl. 39075 ow. mt.

Note: The item numbers listed in the table refer to the corresponding centre plates.

This compatibility overview relates solely to the **technical feasibility of installing our detectors** into the switch ranges listed. **None of the guarantees apply** to colour, surface finish or flush fit (height difference between the detector and the frame). Whether the appearance is a good match is a **subjective decision for the Customer**. We recommend **testing the frame and detector in person** before making a final decision, where possible.

	Indoor180N	IndoorHF	Indoor 180	Indoor 140 L
merten				
System M				
1-M / surface-mounted				
M-Smart / surface-mounted	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
M-Pure / M-Pure Decor				
M-Plan / M-Plan II				
System Design				
D-Life - thermoplastic				
D-Life - metal				
D-Life - glass	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
D-Life - stone				
D-Life - surface-mounted				
D-Antique				
Aquadesign				
Aquadesign	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.

* Adapter for System M 55 x 55 mm / ** Adapter for System M in Aquadesign

Schneider Electric				
Elso				
Elso Joy / surface-mounted	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
Elso Joy IP44				
Elso Fashion / surface-mounted	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
Elso Fashion IP44				
Design Exact				
Primo				
Solid / real glass	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
Basic				

* Combination frame 55

BUSCH-JAEGER				
SI ranges / 55 mm size				
Busch-balance SI / surface-mounted	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
Reflex SI				
Busch-Duro 2000 SI	✗	✗	39242 tw. gl.	✗
Design ranges / Platform 63				
future linear / surface-mounted solo	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94345 pw. gl.
Busch-axcent / pure				
Busch-dynasty				
carat				
Design ranges / 70 mm size				
Busch-art linear	✓	✓	35126 pw. gl. 39222 pw. gl. 39223 tw. gl. 39241 sw. gl.	94346 pw. gl.
Decento				
Allwetter 44*	✗	✗	✗	✗
ocean				
Busch-balance AP				

* Intermediate ring for Busch-balance SI cover plates – Platform 63

** Intermediate ring for Busch-balance SI cover plates – Busch-art linear