

DS detector for maximum safety

Phase 1/L1

Phase 2/L2


(e.g. emergency generator)

NEW

92760





92761

- Increased reliability through two-phase operation
- Two galvanically isolated lighting groups with simultaneous switching
- Manual switching possible via common push-button

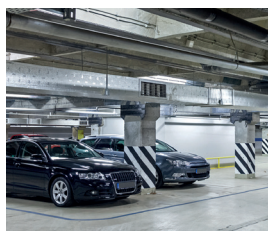

Block Diagrams

Mains operation: CH1+CH2 Emergency operation: CH2

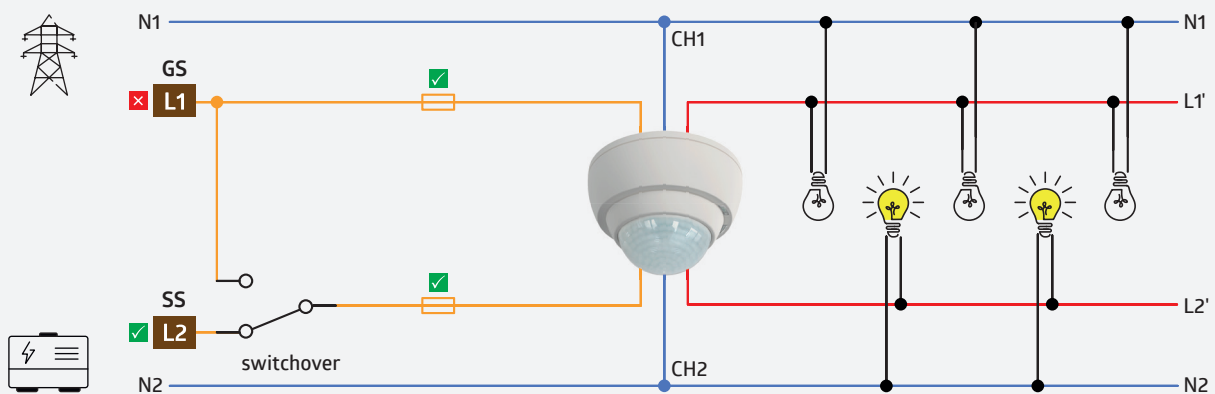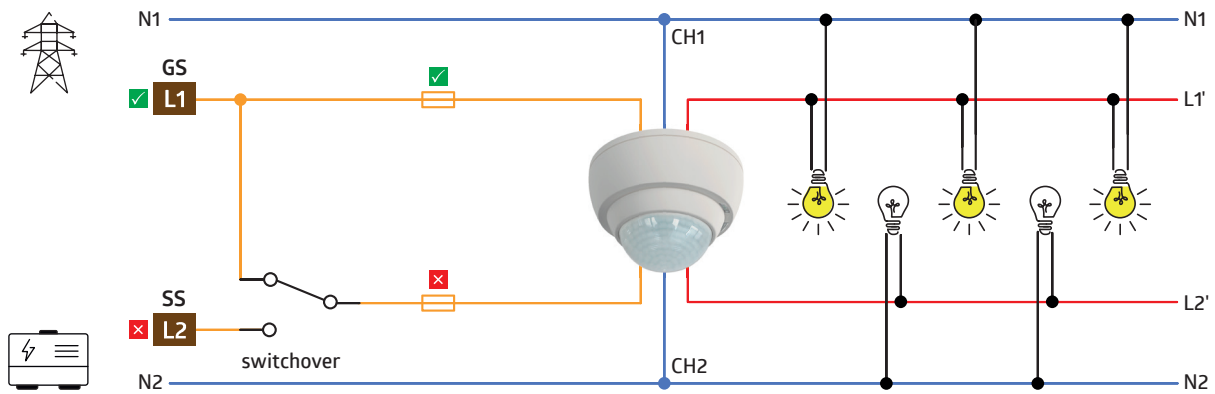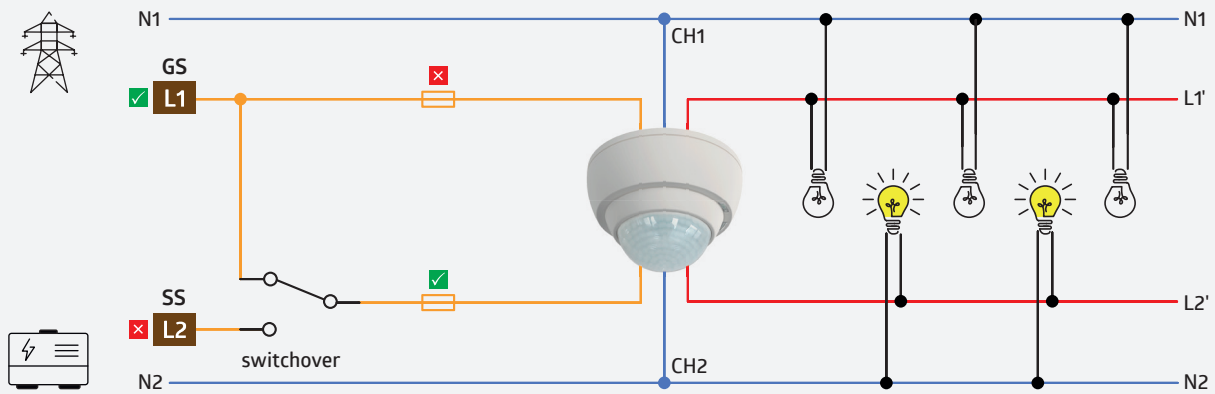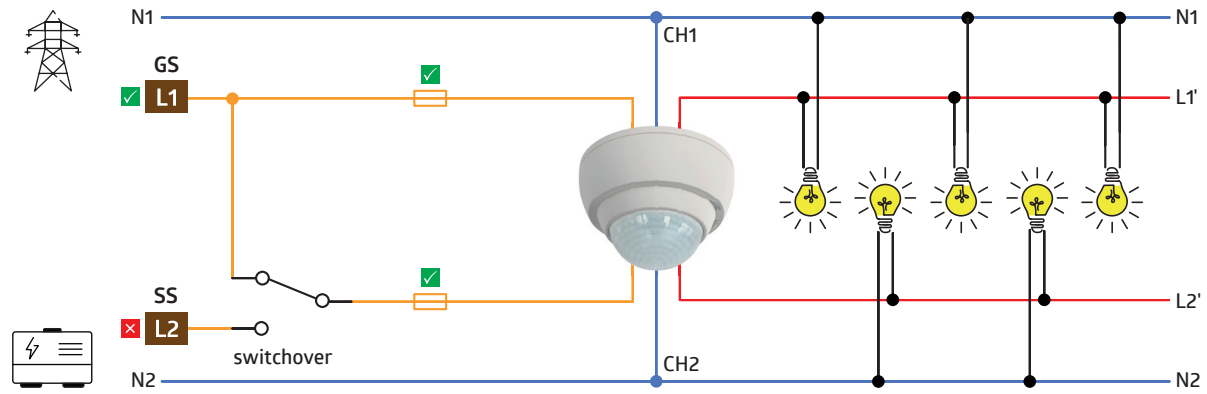

GS: General supply

SS: Safety power supply