

B.E.G. LUXOMAT®



▪ www.beg-luxomat.com ▪

Super flat occupancy detector
for sophisticated interior design



Thickness only 0.85 mm

Presumably the most flat occupancy detector on the market

Our occupancy detector **LUXOMAT® PD11** is first choice for designers objects: with a thickness of only 0.85 mm it is almost invisible on the ceiling. Additionally to its flat design, it reliably detects within a range of 9 m. Ornamental rings with different colours offer the possibility to meet the customer's individual demands.

By using motion detection, light evaluation and the internal logic, the occupancy detector has all necessary means for

a perfect control of the building illumination. Thanks to its optimised construction, the device needs little space and can be installed quickly.

The entire innovative technology is accommodated in the housing of the mini occupancy detector. Integrated spring fasteners allow for an easy mounting. The PD11 can be programmed conveniently using the optional remote control.



PD11-M-1C-FLAT-FC

Part no. 92583

PD11-S-FLAT-FC

Part no. 92593


- Conventional 110-240V supply
- 360° Detection area
- Available as Master or Slave version
- Remote controllable
- IP20 / Class II / CE
- Dimensions:
Ø 52 x H 60 mm



PD11-KNX-FLAT-FC

Part no. 92893

- For KNX BUS technology
- 360° Detection area
- Switching mode, controlling mode, slave mode, permanent dimmer
- 3 HVAC-Channels (1 Bit)
- Remote controllable
- IP20 / Class II / CE
- Dimensions:
Ø 52 x H 43.3 mm

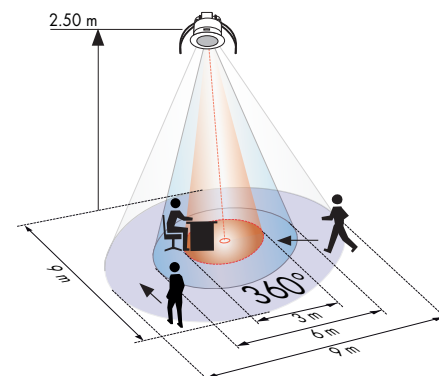

Accessory (optional)

Cover ring black (included), Part no. 92537

Cover ring different colours on request