

B.E.G.**LUXOMAT®**

PD2N-M-DACO-1C DALI-2 Bundle 93455-93773-92199

- Voltage: 230 V AC $\pm 10\%$ 50 Hz
- Dimensions: \varnothing 200 x 90 mm (92199)
- Power consumption: approx. 2 W

Order data

Designation	Colour	Art.No
PD2N-M-DACO-1C DALI-2 Bundle 93455-93773-92199	black	1226656904

Areas of application

- small offices
- open-plan offices

Technical data

Voltage:	230 V AC $\pm 10\%$ 50 Hz
Dimensions:	Ø 200 x 90 mm (92199)
Power consumption:	approx. 2 W
Slave devices:	up to 8
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 10 m across max. Ø 6 m towards max. Ø 4 m seated
Range:	
Monitored area (tangential movement):	78 m² / 2.5 m mounting height
Mounting height min./max./recommended:	2 m / 5 m / 2.5 m
Degree / class of protection:	IP20 / Class II
Impact strength:	IK09 (92199)
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant + coated steel basket (92199)
Material color:	black mat, similar to RAL9005 (93773)
Channel 1 (lighting control)	
DALI output:	80 mA (guaranteed), 125 mA (max.), Shut-down mechanism
Supported control gear:	DT0, DT5, DT6, DT7
Supported control devices:	- (single master)
Follow-up time:	1 min – 150 min
Orientation light:	10 – 30 % / OFF / 5 min – 60 min / ∞
Brightness set value:	10 – 2500 Lux
Channel 2 (HVAC or lighting control)	
Switching power:	2300 W, $\cos \varphi =$ 1 1150 VA, $\cos \varphi =$ 0.5 300 W LED max. inrush current I_p (20 ms) = 165 A
Type of contact:	1x μ -contact, dry, bistable

Product information

Bundle : PD2N-M-DACO-1C DALI-2 + Cover ring PD2N
FC black mat, similar to RAL9005 + Wire basket BSK (Ø
200 x 90 mm) white

Occupancy detector with integrated DALI application controller
for energy-efficient lighting control

DALI-2 certified product

Integrated DALI power supply

DALI interface for controlling digital, dimmable ECGs in broadcast
mode

Manual switching or dimming via conventional pushbuttons

Bidirectional IR communication enables fast integration into the
project management function of the B.E.G. One app

Complete range of functions can only be activated using the BLE-
IR-Adapter and a compatible Smartphone or Tablet (Android,
iOS).

Semi-automatic, full automatic, presence-independent or light-
independent mode adjustable

Powerful switching relay for different operating modes, e.g. Cut-
off function for DALI ballasts, HVAC, blackboard illumination.

Adjustable regulation dynamics (minimum and maximum values)

Adjustable speed and delay of the regulation

Single master version, not networkable

Detection area can be extended by using slave devices

Mixed light measurement with internal and external light sensor

DALI output power can be increased with accessories

Integrated daylight harvesting circuit (or switch output)

Adjustable switch-on value

Last value - Reminder function for switch-on value

Adjustable brightness set value and reflection factor

Indication of the current light sensor value in the B.E.G. One App




Self-check and display of device errors in the B.E.G. One App

Status LEDs can be activated / deactivated

PIN code

Corridor function - Deactivates the possibility to switch off the
light via the push-button

Follow-up time:	5 min – 120 min, Alarm pulse, Pulse	Number of DALI participants can be determined quickly and reliably via the B.E.G. Online DALI Line Planner
Light measuring:	Mixed light measuring	Avoidance of standby losses of the lighting system in accordance with EnEV DIN V 18599-4
		Software is backwards compatible with the first generation (except DSI, double lock and corridor function)
		Factory setting 10 min follow-up time and 500 lux brightness set value
		Including pre-assembled spring clamp with strain relief and contact protection cap for recessed ceiling mounting
		Accessory for surface mounting available

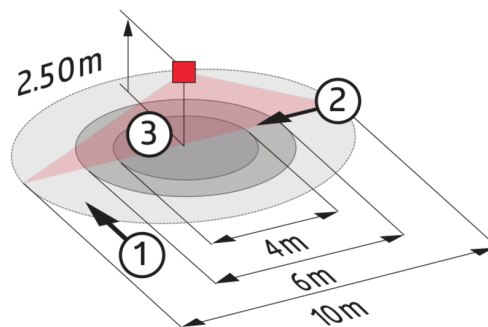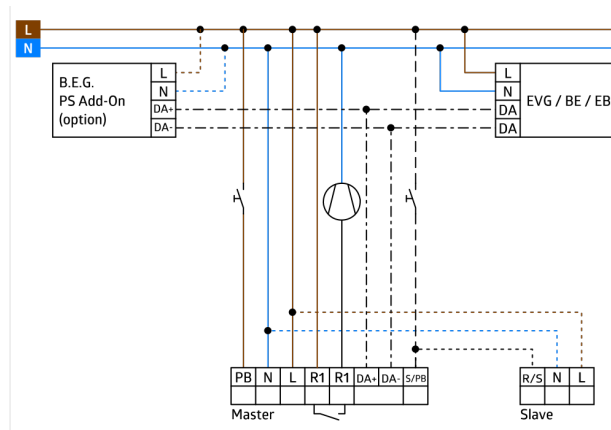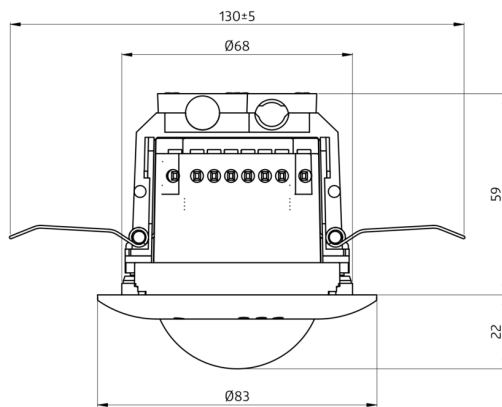

Bundle items

To receive the bundle according to the technical specification, please order the items listed.




PD2N-M-DACO-1C DALI-2
Art.No: 93455

Voltage: 230 V AC $\pm 10\%$ 50 Hz
Dimensions: \varnothing 84 x 85 mm
Power consumption: approx. 2 W



Cover ring PD2N FC
Art.No: 93773

Dimensions: \varnothing 82 x 13 mm
Impact strength: IK05
Housing: polycarbonate, UV-resistant



Wire basket BSK (\varnothing 200 x 90 mm)
Art.No: 92199

Dimensions: \varnothing 200 x 90 mm
Impact strength: IK09
Housing: coated steel basket