



PD4N-KNXs-ST-FM Bundle 93515-93073

- Voltage: via KNX BUS
- Dimensions: FM= Ø 106 x 55 mm
- Typ. power input: 12 mA

Order data

Designation

PD4N-KNXs-ST-FM Bundle
93515-93073

Colour

white

Art.No

484856597

Technical data

Voltage:	via KNX BUS
Dimensions:	FM= Ø 106 x 55 mm
Typ. power input:	12 mA
Detection area:	horizontal 360° (Ceiling mounting) (93073) max. 40 m x 5 m across max. 20 m x 3 m towards (93073)
Range:	250 m² / 2.5 m mounting height (93073)
Monitored area (tangential movement):	2.4 m / 2.6 m / 2.5 m (93073)
Mounting height min./max./recommended:	FM= IP20 / Class III
Degree / class of protection:	IK04
Impact strength:	-25 °C to +55 °C
Ambient temperature:	polycarbonate, UV-resistant
Housing:	2
Number of light sensors:	white, similar to RAL9010 (93073)
Material color:	4
Number of PIR sensors:	Yes
KNX TP 256:	5 – 100 % / OFF / 1 min – 255 min
Orientation light:	5 – 100 %
Night light:	5 – 2000 Lux
Brightness set value:	

Product information

Bundle : PD4N-KNXs-ST-FM + Corridor lens PD4N type A white, similar to RAL9010

KNX occupancy detector with integrated KNX bus connector

KNX Secure ready

Parameterisation from ETS 5 for integration into KNX systems

Individual adaption of detection sensitivity for each PIR sensor

PIR sensors can be deactivated individually

Direction of movement can be identified

Mixed light measurement using internal, external and remote (optional) light sensors

Intelligent semi-automatic mode, occupancy-independent regulating mode (photoelectric switch), full automatic mode

1 x light output (for regulating or switching), 1 x slave output, 3 x HVAC outputs (separately programmable)

Regulation of up to three lighting groups using offset (external influence possible)

Short presence, self-adjusting follow-up time, corridor function

Various locking functions

Soft-start

Recall of light scenes

Deactivatable status indicators

The product database for import into the ETS database can be downloaded from the B.E.G. homepage.

Detection area can be extended thanks to master-slave-mode

Extensive optimization options for light measurement

Measured light value is communicated to the bus

Adaption of dimming curve

Bidirectionally remote control-capable with the IR adapter and the B.E.G. smartphone app

PIN code

IR remote control-capable via IR remote control (optionally)

Programming button (phys. address) can be operated via remote control

HVAC mode (0=automatic, 1=comfort, 2=stand-by, 3=economy, 4=antifreeze/heat protection)

Manual influence via external KNX push buttons possible

Function control (heartbeat, cyclical sending)

Forced switch-off




Intelligent central-off function

Premonition of switch-off

Burn-in function for fluorescent lamps selectable from 1h till 100h

Behaviour upon bus voltage return definable at choice

Variable safety pause after switching off the lights

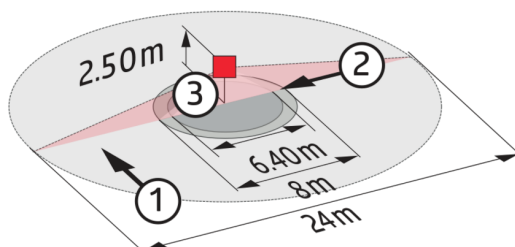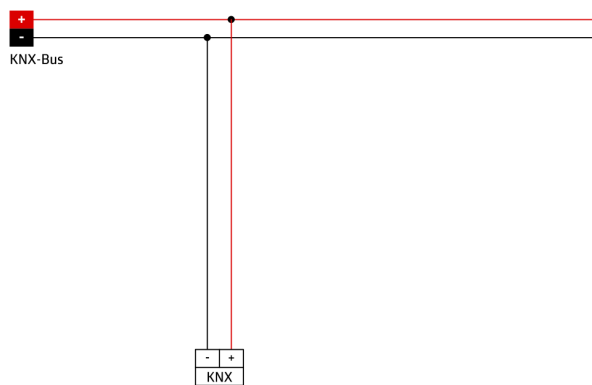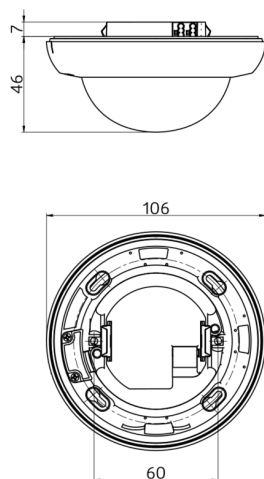

Bundle items

To receive the bundle according to the technical specification, please order the items listed.



PD4N-KNXs-ST-FM
Art.No: 93515

Voltage: via KNX BUS
Dimensions: FM= Ø 106 x 55 mm
Typ. power input: 12 mA



Corridor lens PD4N type A
Art.No: 93073

Detection area: horizontal 360° (Ceiling mounting)
Range: max. 40 m x 5 m across
max. 20 m x 3 m towards
Monitored area (tangential movement): 250 m² / 2.5 m mounting height