



## PD4N-KNXs-ST-FM Set 93515-93743

- Voltage: via KNX BUS
- Dimensions: Ø 106 x 55 mm
- Typ. power input: 12 mA

### Order data

| Designation                           | Colour | Art.No |
|---------------------------------------|--------|--------|
| PD4N-KNXs-ST-FM                       | white  | 93515  |
| Corridor lens PD4N type A, Cover ring | black  | 93743  |

## Technical data

|  |   |
|--|---|
| Voltage:                               | via KNX BUS   |
| Dimensions:                            | Ø 106 x 55 mm   |
| Typ. power input:                      | 12 mA   |
| Detection area:                        | <b>horizontal<br/>360° (Ceiling<br/>mounting)<br/>(93743)<br/>max. Ø 40 m<br/>across<br/>max. Ø 20 m<br/>towards<br/>(93743)<br/>250 m² / 2.5<br/>m mounting<br/>height<br/>(93743)<br/>2.4 m / 2.6 m<br/>/ 2.5 m<br/>(93743)</b> |
| Range:                                 |   |
| Monitored area (tangential movement):  |   |
| Mounting height min./max./recommended: |   |
| Degree / class of protection:          | IP20 / Class III  |
| Impact strength:                       | IK04  |
| Ambient temperature:                   | -25 °C to +55 °C  |
| Housing:                               | polycarbonate, UV-resistant   |
| Number of light sensors:               | 2   |
| Material color:                        | <b>black mat,<br/>similar to<br/>RAL9005<br/>(93743)</b>  |
| Number of PIR sensors:                 | 4   |
| KNX TP 256:                            | Yes   |
| KNX Secure:                            | Yes   |
| Orientation light:                     | 5 – 100 % / OFF<br>/ 1 min – 255 min  |
| Night light:                           | 5 – 100 %   |
| Brightness set value:                  | 5 – 2000 Lux  |

## Product information

Set : PD4N-KNXs-ST-FM + Corridor lens PD4N type A, Cover ring black mat, similar to RAL9005

KNX occupancy detector with integrated KNX bus connector

KNX Secure ready

Parameterisation from ETS 5 for integration into KNX systems

Individual adaption of detection sensitivity for each PIR sensor

PIR sensors can be deactivated individually

Direction of movement can be identified

Mixed light measurement using internal, external and remote (optional) light sensors

Intelligent semi-automatic mode, occupancy-independent regulating mode (photoelectric switch), full automatic mode

1 x Light (for regulating or switching), 1 x slave output, 3 separate HVAC-blocs

Regulation of up to three lighting groups using offset (external influence possible)

Short presence, self-adjusting follow-up time, corridor function

Various locking functions

Soft-start

Recall of light scenes

Deactivatable status indicators

The product database for import into the ETS database can be downloaded from the B.E.G. homepage.

Detection area can be extended thanks to master-slave-mode

Extensive optimization options for light measurement

Measured light value is communicated to the bus

Adaption of dimming curve

Bidirectionally remote control-capable with the IR adapter and the B.E.G. smartphone app

PIN code

IR remote control-capable via IR remote control (optionally)

Programming button (phys. address) can be operated via remote control

HVAC mode (0=automatic, 1=comfort, 2=stand-by, 3=economy, 4=antifreeze/heat protection)

Manual influence via external KNX push buttons possible

Function control (heartbeat, cyclical sending)

Forced switch-off




Intelligent central-off function

Premonition of switch-off

Burn-in function for fluorescent lamps selectable from 1h till 100h

Behaviour upon bus voltage return definable at choice

Variable safety pause after switching off the lights

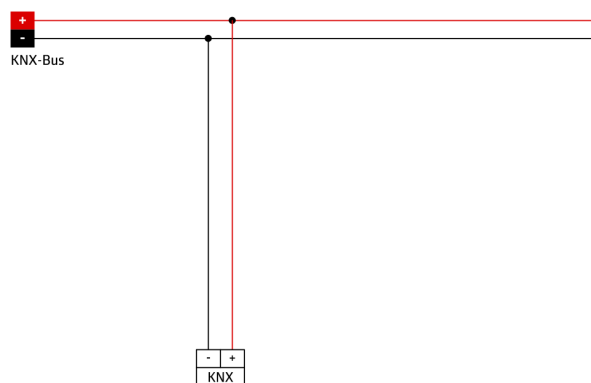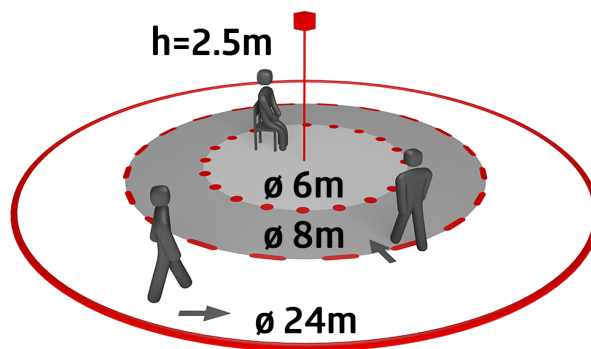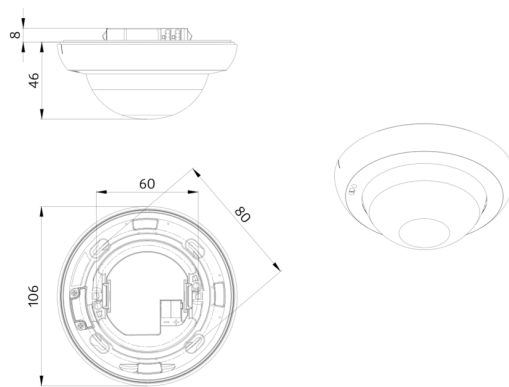

## Set items

To receive the bundle according to the technical specification, please order the items listed.



### **PD4N-KNXs-ST-FM**

Art.No: 93515

Voltage: via KNX BUS  
Dimensions: Ø 106 x 55 mm  
Typ. power input: 12 mA



### **Corridor lens PD4N type A, Cover ring**

Art.No: 93743

Detection area: horizontal 360° (Ceiling mounting)  
Range: max. Ø 40 m across  
max. Ø 20 m towards  
Monitored area (tangential movement): 250 m<sup>2</sup> / 2.5 m mounting height