

B.E.G.**LUXOMAT[®]net**

PD9-KNXs-DX-FC Set 93520-92993

- Voltage: via KNX BUS
- Dimensions: **Sensor head: Ø 45 x 28 mm, Power supply: 129 x 29 x 22 mm + 45 x 45 x 2.6 mm (92993)**
- Typ. power input: 12 mA

Order data

Designation	Colour	Art.No
PD9-KNXs-DX-FC	white	93520
Square design frame PD9-FC	pure white	92993

Technical data

Voltage:	via KNX BUS
Dimensions:	Sensor head: Ø 45 x 28 mm, Power supply: 129 x 29 x 22 mm + 45 x 45 x 2.6 mm (92993)
Typ. power input:	12 mA
Detection area:	horizontal 360° (Ceiling mounting) max. Ø 10 m across max. Ø 6 m towards max. Ø 4 m seated
Range:	78 m ² / 2.5 m mounting height
Monitored area (tangential movement):	2 m / 5 m / 2.5 m
Mounting height min./max./recommended:	IP20 / Class III
Degree / class of protection:	IK03
Impact strength:	-5 °C to +45 °C
Temperature measurement range:	-25 °C to +55 °C
Ambient temperature:	polycarbonate, UV-resistant
Housing:	pure white mat, similar to RAL9010 (92993)
Material color:	1
Number of light sensors:	1
Number of PIR sensors:	Yes
KNX TP 256:	Yes
KNX Secure:	45 cm
Cable length:	5 - 100 % / OFF / 1 min - 255 min
Orientation light:	5 - 100 %
Night light:	5 - 2000 Lux
Brightness set value:	

Product information

Set : PD9-KNXs-DX-FC + Square design frame PD9-FC pure white mat, similar to RAL9010

KNX mini occupancy detector with integrated bus connector

KNX Secure ready

HCL/RGB control

Parameterisation from ETS 5 for integration into KNX systems

Individual adaption of the PIR sensor sensitivity

Mixed light measurement using internal and remote (optional) light sensors

Intelligent semi-automatic mode, occupancy-independent regulating mode (photoelectric switch), full automatic mode

1 x Light (for regulating or switching), 1 x slave output, 3 separate HVAC-blocs

Regulation of up to three lighting groups using offset (external influence possible)

Short presence, self-adjusting follow-up time, corridor function

Various locking functions

Soft-start

Two logic modules

Recall of light scenes

Deactivatable status indicators

The product database for import into the ETS database can be downloaded from the B.E.G. homepage.

Detection area can be extended thanks to master-slave-mode

Extensive optimization options for light measurement

Measured light value is communicated to the bus

Adaption of dimming curve

Bidirectionally remote control-capable with the IR adapter and the B.E.G. smartphone app

PIN code

IR remote control-capable via IR remote control (optionally)

5 button remote control, programmable at choice (accessory)

Programming button (phys. address) can be operated via remote control

HVAC mode (0=automatic, 1=comfort, 2=stand-by, 3=economy, 4=antifreeze/heat protection)

Manual influence via external KNX push buttons possible

Function control (heartbeat, cyclical sending)

Occupancy simulation

Forced switch-off




Intelligent central-off function

Premonition of switch-off

Burn-in function for fluorescent lamps selectable from 1h till 100h

Behaviour upon bus voltage return definable at choice

Variable safety pause after switching off the lights

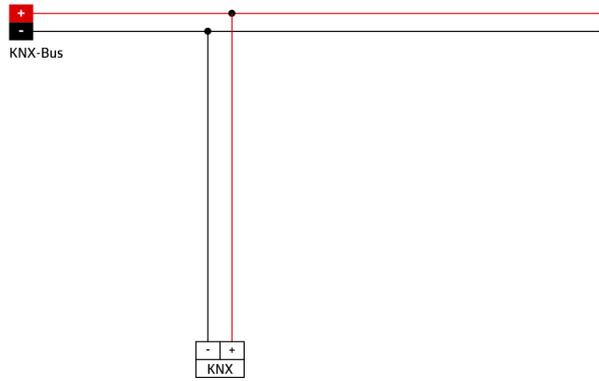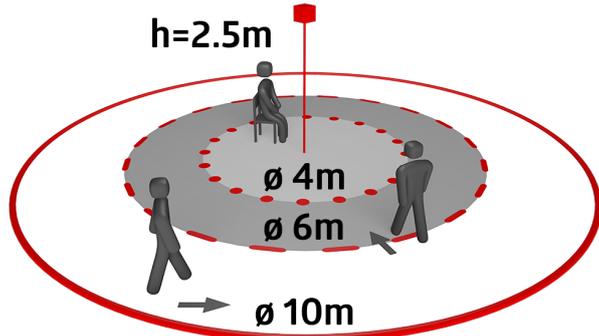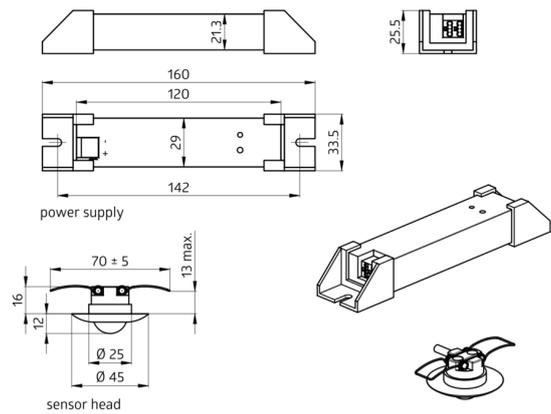

Set items

To receive the bundle according to the technical specification, please order the items listed.




PD9-KNXs-DX-FC

Art.No: 93520

Voltage: via KNX BUS

Dimensions: Sensor head: Ø 45 x 28 mm, Power supply: 129 x 29 x 22 mm

Typ. power input: 12 mA

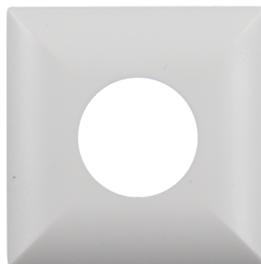

Square design frame PD9-FC

Art.No: 92993

Dimensions: 45 x 45 x 2.6 mm

Housing: polycarbonate, UV-resistant

Material color: pure white mat, similar to RAL9010